



Cat.6 Wall Outlet with surface box

Technical Features

Category 6 Class E 250 MHz


ISO/IEC 11801 and TIA/EIA 568B.2-1

2 shielded RJ45 jacks 40° angled

Fully shielded housing

Flush-mounted type with surface back box

Technical Drawings

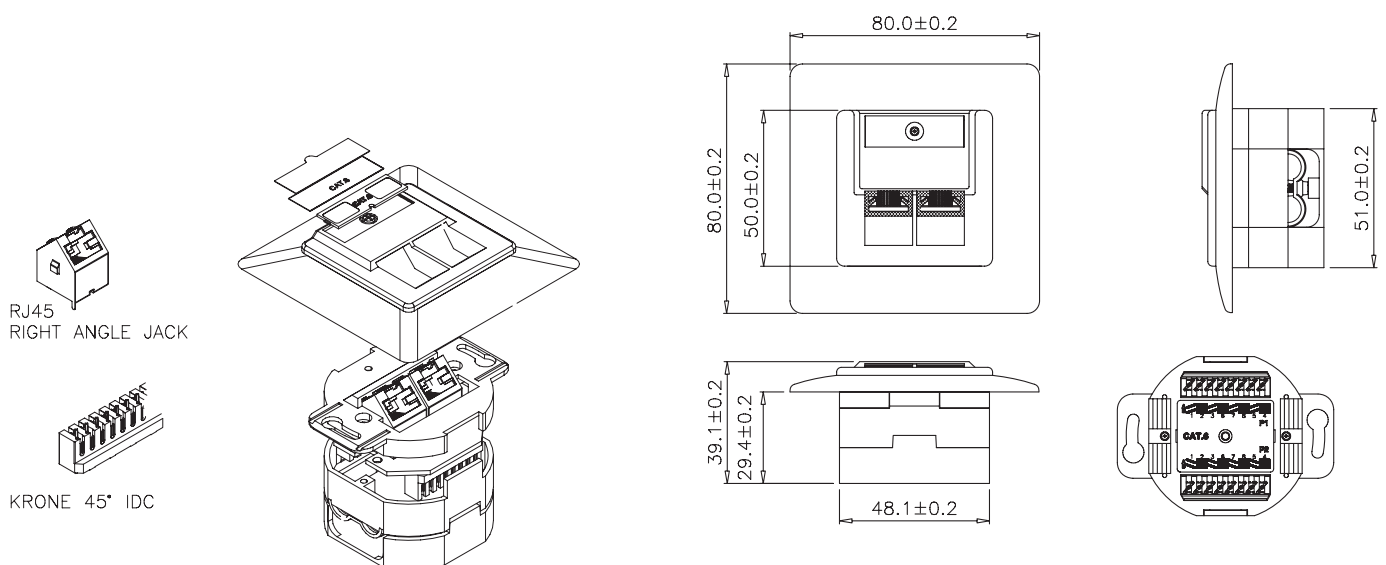

www.logilink.com



RoHS
compliant



Made in China

* The specifications and pictures are subject to change without notice.
*All trade names referenced are the registered trademark of their respective owners.

Part no.	Color	EAN Code
NP0006	Pure white	4260113562116
NP0039	Signal white	4260113568101

Package Contents

Cat.6 Wall Outlet with surface box x 1

Packaging Informations(NP0006)

Packing Dimension	80 x 80 x 50mm
Packing Weight	0.25kg
Carton Dimension	450 x 380 x 195mm
Carton Q'ty	60pcs
Carton Weight	14.2kg

Packaging Informations(NP0039)

Packing Dimension	80 x 80 x 50mm
Packing Weight	0.25kg
Carton Dimension	465 x 335 x 190mm
Carton Q'ty	50pcs
Carton Weight	12.3kg



X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Input Devices](#) category:

Click to view products by [Logilink](#) manufacturer:

Other Similar products are found below :

[80260-08](#) [M11L0A1](#) [M11L0B1M](#) [M21L0H1PX](#) [M41C091P100](#) [80260-00](#) [81521-08](#) [FKB4720-103](#) [84250-26](#) [84980-04](#) [84S-AC1-000](#)
[C10O0C1P](#) [JD-0700EU-2](#) [JM-0800-2](#) [JOY-THUMB](#) [JW-T0100](#) [89498-13](#) [89758-05](#) [89886-26](#) [89941-00](#) [FQ-XT](#) [G3-A1AM151NNNN](#)
[G80-3000LSCEU-2](#) [M11C011B](#) [TH500P00D4](#) [MJ0FGGRY](#) [JM-0800-0](#) [KBCV-4100W](#) [MR2110R5BB](#) [60C22-M7-4-020S](#) [67A-DF-3C-](#)
[060C](#) [84S-BB1-004](#) [81601-26](#) [G8011900LPMUS0](#) [G844420LUBEU0](#) [G84-4700LUCUS-0](#) [89701-26](#) [81485-26](#) [84105-13](#) [V400-W24 5M](#)
[V400-W23 5M](#) [G84-5200LCMEU-2](#) [M11F061P](#) [84Z2029-100](#) [4P182F1D0100](#) [M41L091M](#) [M41L091P](#) [60A00-8-050C](#) [84Z2029-78](#)
[XD2CF1111](#)