


AC METALLIZED POLYPROPYLENE FILM CAPACITORS FOR MOTOR APPLICATIONS

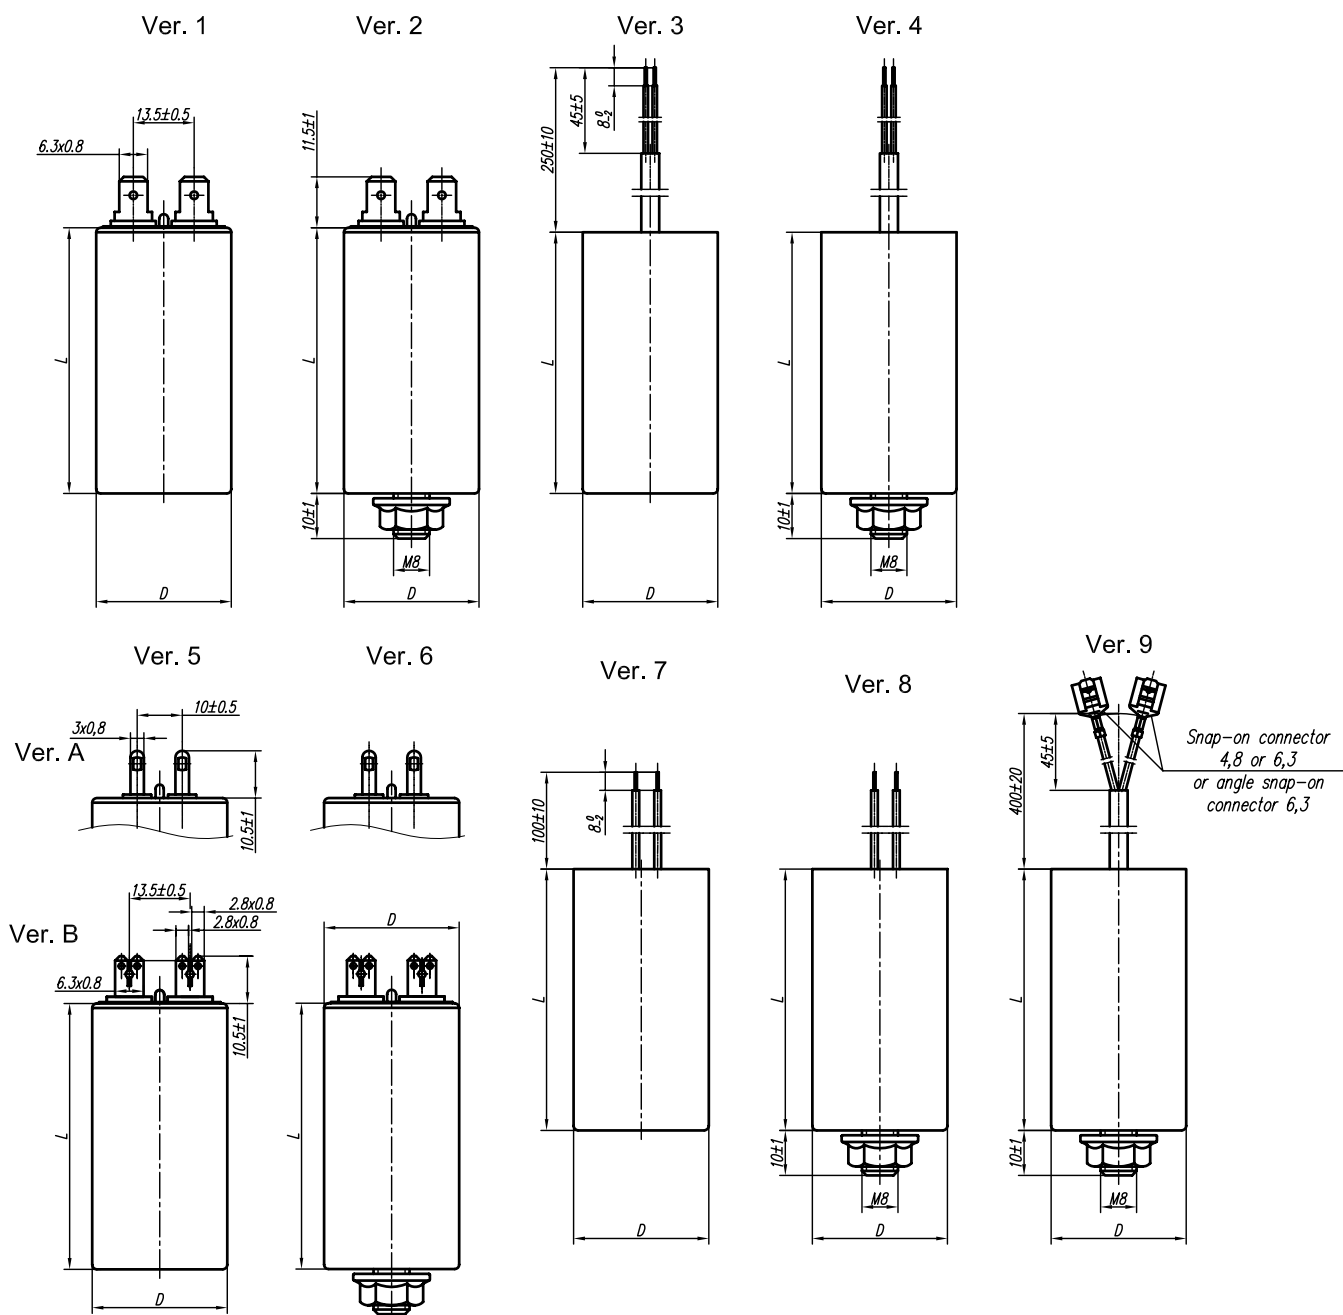

- Version 1 and 2 - capacitor with fast-on terminals according to PN-EN 61210.
Version 3 and 4 - capacitor with two-core cable lead according to PN-91/E-90103.
Version 5 and 6 - capacitor versions:
A - with soldering terminals $3 \times 0,8$
B - with tabs $2 \times 2,8 \times 0,8$ ($6,3 \times 0,8$)
Version 7 and 8 - capacitor with two single-core cable leads.
Version 9 - 2; 2,5; 3; 4; $5 \mu\text{F}$ capacitors with $\pm 10\%$ tolerance and H05V2V2-F 300/500V $2 \times 0,75 \text{mm}^2$ black insulated leads with VDE certificate with 4,8-075U T85 or 6,3-075U T85 snap-on connector or angle snap-on connector FH $6,3 \times 0,8$ -Ms (upon prior agreement).

NOTE:

1. Misalignment of terminals in relation to the capacitor axis may occur in versions 3; 4; 7; 8 and 9; other lengths of leads is available upon prior agreement.

APPLICATION:

The MKSP-5P capacitors are intended for use in a.c. circuits with the frequency of 50Hz. They are mainly used in single-phase electric motors as running capacitors. The capacitors have plastic case.

The MKSP-5P capacitors can be used with a d.c. voltage not exceeding the following value: $V_{dc} = \sqrt{2} * U_n$

 **MIFLEX S.A.**

ZAKŁADY PODZESPOŁÓW RADIOWYCH
GRUNWALDZKA 3, 99-300 KUTNO, POLAND
Telephone: +48 24 355 11 00 ÷ 02
Fax: +48 24 355 11 88
e-mail: miflex@miflex.com.pl

Revision date
25.06.2008

Page
1/2

AC METALLIZED POLYPROPYLENE FILM CAPACITORS FOR MOTOR APPLICATIONS

Application class (acc. to EN 60252-1 and VDE 0560 part 8):

B - expected life 10000h (HSFNT*)

C - expected life 3000h (HSFPU*)

D - expected life 1000h (HSFQV*)

* - previous symbols

TECHNICAL DATA:

- Climatic category: - 25/070/21,
- Dissipation factor: - ≤ 0.003 at $f = 50\text{Hz}$,
- Dielectric strength
 - between terminals: - 2UR - 60s,
 - between terminals and case: - min. 2000V / 50Hz - 60s,
- Standards: - EN 60252-1, VDE 0560 part 8
- Specifications: - WT-96/MIFLEX/MKSP-5P,
- Approval mark: - VDE.

This product fulfils the requirements of the RoHS Directive (2002/95/EC).

Rated capacitance C_N	Capacitance tolerance	Rated voltage, class	Dimensions								VDE approval for voltage and class
			Ver. 1,2,5,6		Ver. 3,7		Ver. 4,8		Ver. 9		
			D^{+1}	L_{-2}^{+3}	D^{+1}	L_{-2}^{+3}	D^{+1}	L_{-2}^{+3}	D^{+1}	L_{-2}^{+3}	
μF	%	V~	mm	mm	mm	mm	mm	mm	mm	mm	
2	±5 ±10	450V~ B 500V~ D	25	58	25	51	25	53	25	58	450V~ C VDE 500V~ D VDE
2,5											
3											
4											
5											
6											
7											
7,5											
8											
9											
10											
12											
14											
16											
18											
20											
22											
25											
30											
32											
35											
40											
45											
50											
30											
32											
35											
40											



ZAKŁADY PODZESPOŁÓW RADIOWYCH
GRUNWALDZKA 3, 99-300 KUTNO, POLAND
Telephone: +48 24 355 11 00 ÷ 02
Fax: +48 24 355 11 88
e-mail: miflex@miflex.com.pl

Revision date
25.06.2008

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Motor Start Capacitors & Motor Run Capacitors](#) category:

Click to view products by [Miflex](#) manufacturer:

Other Similar products are found below :

[SFS37S30-5K400E-F](#) [SFT44S45-5K491E-F](#) [I170V525J-B00](#) [870CG35800AA2J](#) [878AF24600AA1J](#) [MKSP-6P 4UF 450V B](#) [MKSP-6P 5UF 450V B](#) [MKSP-6P 8UF 450V B](#) [I150V468K-G1](#) [I150V510K-G1](#) [I150V530K-C1](#) [I150V540K-H1](#) [I150V560K-C1](#) [I150V560K-G1](#) [I150V620K-G1](#) [I150V640K-G1](#) [I150V645K-B1](#) [I150V660K-C1](#) [I15KV530K-B](#) [I15KV530K-D](#) [I15KV580K-D](#) [I15KV610K-B](#) [I15KV612K-D](#) [I15KV640K-B](#) [I15KV640K-D](#) [I18UV525I-A1 -5%](#) [C274ACF5150WA0J](#) [CBB60A-12/450](#) [CBB60A-1.5/450](#) [CBB60A-20/450](#) [CBB60A-6/450](#) [CBB60E-50/450](#) [CBB60E-6/450](#) [CBB60E-80/450](#) [CBB60G-16/450](#) [CBB60G-6/450](#) [CBB60H-10/450](#) [CBB60H-14/450](#) [CBB60H-30/450](#) [C274ACF4300LF0J](#) [CBB60E-16/450](#) [CBB60A-80/450](#) [C274AC35150AA0J](#) [C276CCF5160LG0J](#) [CBB60E-30/450](#) [CBB60E-2/450](#) [CBB60E-25/450](#) [CBB60H-25/450](#) [C274ACA4250AL0J](#) [C276CC24300AA0J](#)