

SPECIFICATIONS:

- Contact rating: see page 1 or 14
- Electrical life: 30,000 make-and-break cycles at full load
- Contact resistance: 20mΩ max. initial @ 2-4VDC 100mA for both coin silver and gold plated contacts
- Insulation resistance: 1.000MΩ min.
- Dielectric strength: 1.500V RMS @ sea level
- Operating temperature: -30 °C to 85 °C


MATERIALS:

- Toggle handle: brass, chrome plated
- Bushing: brass, nickel plated
- Housing: stainless steel
- Case: diallyl phthalate (DAP) (UL 94V-0)
- Terminal seal: epoxy
- Switch support: brass, tin plated
- Contact materials: see page 1 or 14

SPDT TYPE 1102T1B1M1QE




FUNCTION	SWITCH POSITION		
1	ON	NONE	ON
2	ON	OFF	ON
3	ON	OFF	(ON)
4	(ON)	OFF	(ON)
5	ON	NONE	(ON)
TERM. CONN.	2-3	OPEN	2-1



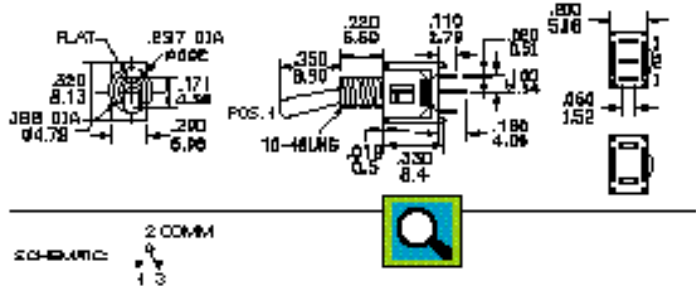


DPDT TYPE 2102T1B1M1QE



FUNCTION	SWITCH POSITION		
1	ON	NONE	ON
2	ON	OFF	ON
3	ON	OFF	(ON)
4	(ON)	OFF	(ON)
5	ON	NONE	(ON)
TERM. CONN.	2-3, 5-6	OPEN	2-1, 5-4

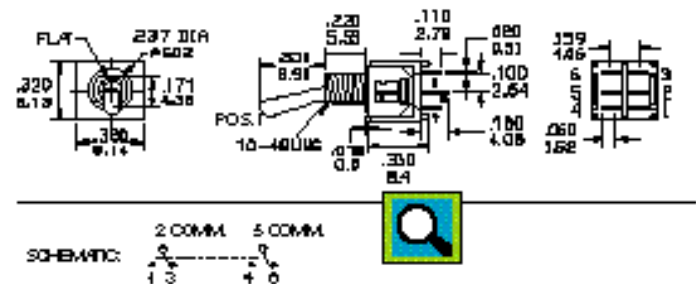

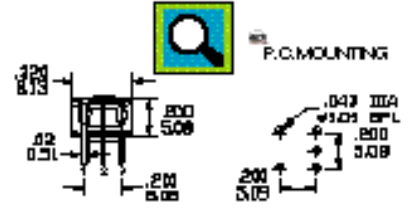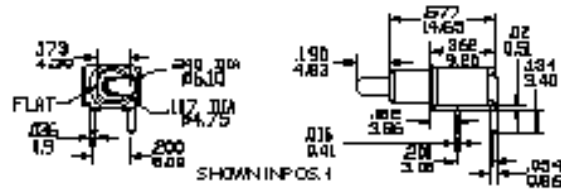

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Toggle Switches](#) category:

Click to view products by [IC Switches](#) manufacturer:

Other Similar products are found below :

[A19HV](#) [8A1-C-222](#) [60012L](#) [6006L](#) [6663](#) [7101MD9V30GE](#) [7101SPDV30BE](#) [7103SDV30BE](#) [7105D](#) [7108P3YAV2BE](#) [71YY50282](#)
[7201MD9AVBE](#) [7301K38](#) [7306K36](#) [7310K36](#) [7314K36](#) [7506K4](#) [7592K6](#) [7691K14](#) [7700K1](#) [8396K108](#) [8824K14](#) [8828K13](#) [G2VX](#) [G3VX](#)
[PS83-121G](#) [A101MD9AB04](#) [A101SD9AB04](#) [A101SDCQ04](#) [A103SD9AQ04](#) [A107TZB04](#) [A123P32YZQ](#) [A123S1YZG](#) [A127S1YCQ](#) [1-](#)
[1825192-0](#) [A131S1YZQ](#) [A201SCWZB04](#) [A207SYCB04](#) [A208J61ZQ0004](#) [A221K12KAG](#) [A221S1YZQ](#) [A221T1TCQ](#) [A232K12KZQ](#)
[A232M1YCQ](#) [A323S1CWZQ](#) [A423S1CWZG-M8](#) [A423S1YZQ](#) [12149A-3V](#) [12156AX408](#) [12147AGKX679](#)