

# 08 Series

# Sub-Miniature Pushbutton Switches


HOW TO ORDER SEE PAGE 1

**SPECIFICATION:**

- Contact rating: see page 1 or 51
- Electrical life: 50,000 make-and-break cycles at full load
- Contact resistance: 20mΩ max. initial @ 2-4V(DC), 100mA for both coin silver and gold plated contacts
- Insulation resistance: 1.000MΩ min.
- Dielectric strength: 1.500V RMS @ sea level
- Operating temperature: -30 °C to 85 °C

**MATERIALS:**



- Plunger: thermoplastic polyester (UL 94V-0)
- Bushing: brass, nickel plated
- Housing: stainless steel
- Case: diallyl phthalate (DAP) (UL 94V-0)
- Terminal seal: epoxy
- Cap and frame: nylon (UL 94V-0)
- Mounting bracket: stainless steel
- Switch support: brass, tin plated
- Contact materials: see page 1 or 51



**SPST TYPE 1908P1B5M1RE**




FUNCTION	SWITCH POSITION	
9	OFF	MOM
TERM. CONN.	OPEN	1-3

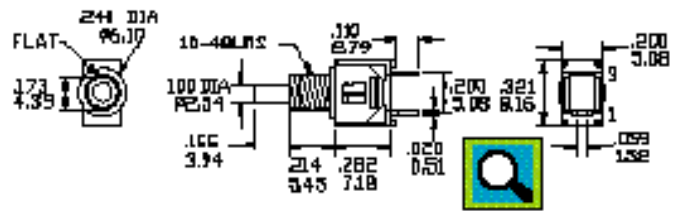


**SPST TYPE 1908P1B6M6RE**



**TERMINATION OPTIONS**

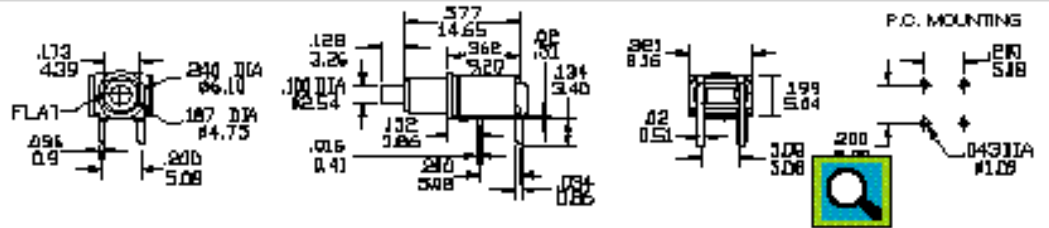




**SPST TYPE 1908P1B6M7RE**

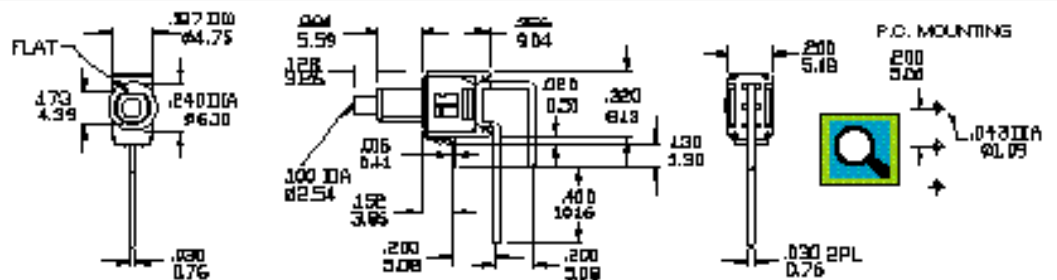

SPST TYPE 1908P1B6VS2RE



VS2



**SWITCHES**

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Pushbutton Switches](#) category:*

*Click to view products by [IC Switches](#) manufacturer:*

Other Similar products are found below :

[LW1L-M1C10V-A](#) [LW2L-A1C20M-GD](#) [LW2L-M1C20M-A](#) [60324L](#) [M7E-HRN2](#) [67021K512](#) [67081K512X](#) [701PB580](#) [719-5504-000](#)  
[MDPSSGLFS](#) [810KSV30B](#) [MML21KA3ABK](#) [MML23KA3AC05K-001](#) [MML23KW3AA01W](#) [8418K2](#) [8646AB6X718UL](#) [8646ABUL](#)  
[FSDWH](#) [9001KXRK](#) [9001T8BK](#) [9533CD4+U574+U4922](#) [1203MRA](#) [A22EM01S](#) [A595](#) [1202A6](#) [12037A2ULCSA](#) [1203A2UL](#) [ABD122N-](#)  
[B](#) [1211390004](#) [ABN111-Y](#) [ABN400-R](#) [1211500044](#) [1211580012](#) [1212MRA](#) [1232A6NF](#) [RA3CSH6A](#) [1241.1183.7047](#) [1241.2511](#)  
[1241.3428](#) [1223A2ULCSA](#) [1223MRA](#) [1232AX2119](#) [1241.1183.8000](#) [1241.1183.8029](#) [1241.2506](#) [1241.2606](#) [12MA6](#) [1301940184](#)  
[RELBARF6X10\(PLASTIC\)](#) [13435AG](#)