





### NS39 PLUGS SERIES

**Specification:**

- 1) Voltage Rating: 250 V AC/DC
- 2) Current Rating: 5A AC/DC
- 3) Temperature Range: -25°C ~ +85°C
- 4) Contact Resistance: 10 mohms max.
- 5) Insulation Resistance: 1000 Mohms min.
- 6) Dielectric Withstanding Voltage: 1500 V AC/DC/Minute
- 7) Material: Nylon 66, UL94V-0

Series No.	No. of ways	A	B
NS39-G2	2	3.96	8.04
NS39-G3	3	7.92	12.10
NS39-G4	4	11.88	15.96
NS39-G5	5	15.84	20.00
NS39-G6	6	19.80	23.90

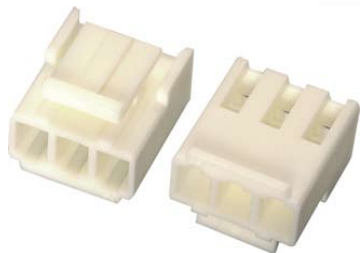

### NS39-Txx



**Material:**

- None - phosphor bronze
- B - brass

**Contact Plating:**

- none - tin
- S - selective gold
- G - gold flash

**Terminal for NS39 Connectors**

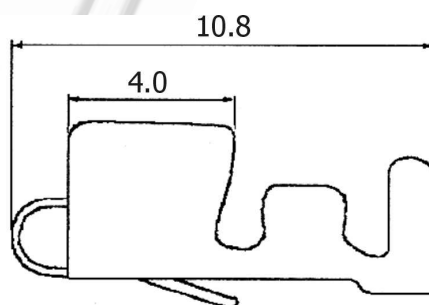

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [I/O Connectors](#) category:*

*Click to view products by [Ninigi](#) manufacturer:*

Other Similar products are found below :

[571763P](#) [58098-0628](#) [61-168618-12P](#) [D38999/20FJ29SB L/C](#) [72.250.1628.2](#) [72.250.2428.2](#) [74720-0505](#) [747680210](#) [76.350.0729.0](#) [76871-1403](#) [FCN-244F080-G/1](#) [FCN-260A9920](#) [FCN-268D024-G/2F#10X-R10](#) [MP-5T180MUNNA-005](#) [MP-5XRJ45UNNB-003](#) [PCS-E50FA](#) [PCS-XE26LKA](#) [PCS-XE26MA+](#) [PCS-XES68MS+](#) [G38A71314B](#) [91-569719-35R](#) [9776-18-6](#) [DX40-50P\(55\)](#) [1571250010](#) [157-22500-3](#) [MS3471L14-19P L/C](#) [171224-6031](#) [1888020-8](#) [91-569786-35H](#) [91-569786-35M](#) [91-644626-35P](#) [172501-4002](#) [172501-6002](#) [FCN-260C008-A/L0](#) [FCN-260C024-AL0](#) [FCN-261Z008](#) [FCN-268D008-G/1K](#) [2000314-1](#) [200331-1](#) [2007498-2](#) [PCR-E28LMDAG1+](#) [PCR-E36FC+](#) [PCS-E28FS+](#) [PCS-XE26SLFD+](#) [PCS-XE26SLFDT+](#) [G38A71214B](#) [HDRA-E68W1LFDTC-SL+](#) [HDR-E14MSG1+](#) [R88A-CNK81S](#) [CRT1-ATT02](#)