

AMTECH

Advanced SMT Solder Products

SMT International, LLC
P.O. Box 989
Deep River, CT 06417
Toll free: 800.435.0317
Phone: 860.526.8300
Fax: 860.526.8243
www.amtechsolder.com

An ISO 9001 Certified Company

Product Data Sheet

Tacky Paste Flux (TPF)

Product Description

- Touch-up and rework
- Attachment of BGA spheres
- Soldering Flip Chip components
- Excellent wetting compatibility
- Wide reflow window
- Compatible with most board finishes

Flux Type

AMTECH Tacky Paste Flux	Type	Class
SynTECH-TPF	N/C	ROLO
SynTECH-LF-TPF	N/C for LF	ROLO
NC-559-TPF	N/C	ROLO
LF-4300-TPF	N/C & W/S	RELO
4300-TPF	N/C & W/S	RELO
NC-559-ASM-TPF	N/C	ROLO
NC-560-TPF	N/C	ROLO
NWS-4100-TPF	W/S	REMO
NWS-4200-TPF	W/S	REMO
NWS-4200-4-TPF	W/S	REHO
NWS-4200-6-TPF	W/S	REH1
NWS-4200-LF-TPF	W/S for LF	REH1
RMA-223-TPF	RMA	ROLO
RMA-223-LF-TPF	RMA for LF	ROMO
RA-223	RA	ROHO

Stencil Life

>8 hrs. @ 20-50% RH & 22-28°C
~4 hrs. @ 50-70% RH & 22-28°C

Stencil Cleaning

Automated stencil cleaning systems for both stencil and misprinted boards. Manual cleaning using isopropyl alcohol (IPA) works well.

Storage and Handling Procedures

Refrigerated storage at 42–47°F will prolong Tacky Paste Flux's shelf life to no less than 1 year. Syringes & cartridges should be stored vertically with the dispensing tip down. Tacky Paste Flux should be allowed to reach ambient temperature naturally, prior to use (about 6-8 hours). NEVER FREEZE TACKY PASTE FLUX.

Available Packaging

Standard packaging for stencil printing and dispensing applications include:
75 & 150 gram jars
150 gram cartridges
10cc & 30cc syringes


(continued)

Tacky Paste Flux (TPF)


SMT International, LLC
P.O. Box 989
Deep River, CT 06417
Toll free: 800.435.0317
Phone: 860.526.8300
Fax: 860.526.8243
www.amtechsolder.com

Recommended Profiles:

Profile-A was designed to serve as a starting point for process optimization using Tacky Paste Flux. A cool down rate of (-) 2–4°C/second is ideal for the formation of a fine grain structure without risking damage to thermally sensitive components. This profile is recommended when soldering Sn63 or Sn62 alloys.

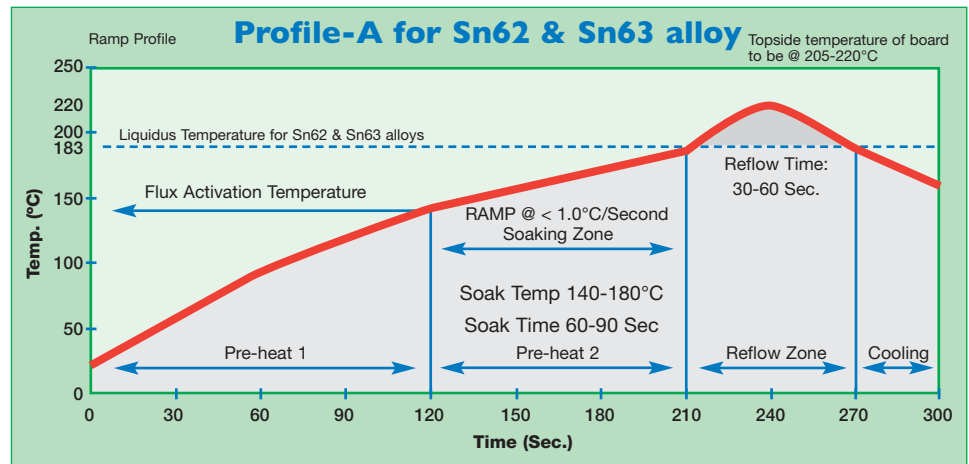

Profile-B was designed to serve as a starting point for process optimization using Tacky Paste Flux. A cool down rate of (-) 2 - 4°C/second is ideal for the formation of a fine grain structure without risking damage to thermally sensitive components. This profile is recommended when soldering Sn96.5/Ag3.0/Cu.5 or Sn96.5/Ag3.5 alloys.

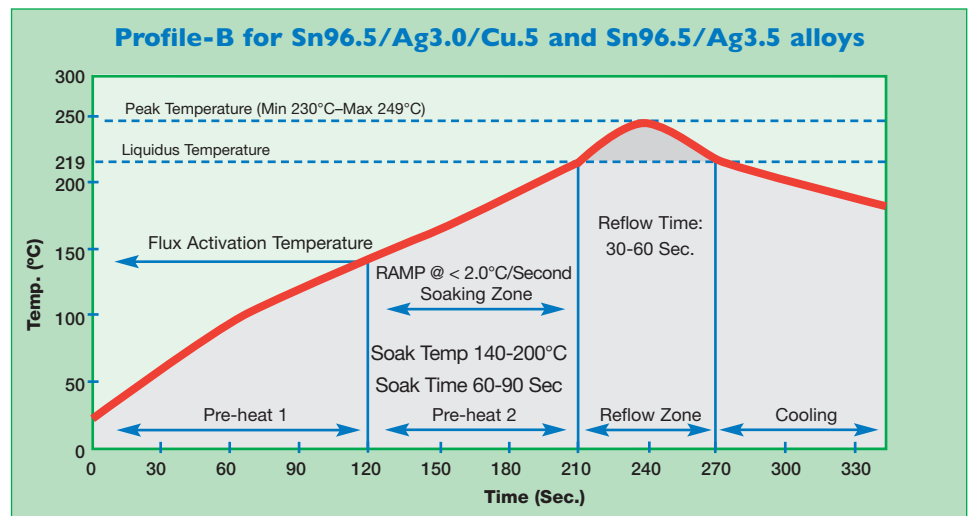

The information contained herein is based on technical data that we believe to be reliable and is intended for use by persons having technical skill, at their own risk. Users of our products should make their own tests to determine the suitability of each product for their particular process. AMTECH will assume no liability for results obtained or damages incurred through the application of the data presented.

Rev: 08/13

AMTECH
Advanced SMT Solder Products

FILLING THE VOID

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Soldering Flux](#) category:

Click to view products by [Amtech](#) manufacturer:

Other Similar products are found below :

[24-6337-9727](#) [8351-1L](#) [051-0008](#) [051-0009](#) [051-0010](#) [053-1000](#) [053-1001](#) [053-1002](#) [053-1003](#) [CW8700](#) [CW8300](#) [SMD4300TF10](#)
[SMD291/30CC](#) [CQ2LF](#) [CQ4LF](#) [8342-50G](#) [CW8100](#) [CW8400](#) [CW8500](#) [CQ4LF-0.5](#) [CQ4LF-1.0](#) [SMD291](#) [SMD291150G](#) [SMD29175G](#)
[SMD291AX](#) [SMD291AX10](#) [SMD291AX250T3](#) [SMD291AX250T5](#) [SMD291ST2CC6](#) [SMD291ST8CC](#) [SMD4300TF](#) [CW8100](#) [CW8200](#)
[SSS500ML](#) [63-0000-0951](#) [63-0000-0977](#) [63-0000-1544](#) [83-1000-0186](#) [83-1097-2331](#) [NF372-TB](#) [760089](#) [8341-10ML](#) [8341-10ML](#) [835-](#)
[100ML](#) [837-P](#) [SF-01](#) [SF-02](#) [2506-N](#) [2507-N](#)