


MULTILAYER CERAMIC CHIP CAPACITORS

Commercial Grade, Soft Termination

C series

| | |
|--------------|--------------------|
| C1005 | [0402 inch] |
| C1608 | [0603 inch] |
| C2012 | [0805 inch] |
| C3216 | [1206 inch] |
| C3225 | [1210 inch] |
| C4520 | [1808 inch] |
| C4532 | [1812 inch] |
| C5750 | [2220 inch] |
| C7563 | [3025 inch] |

* Dimensions code: JIS[EIA]

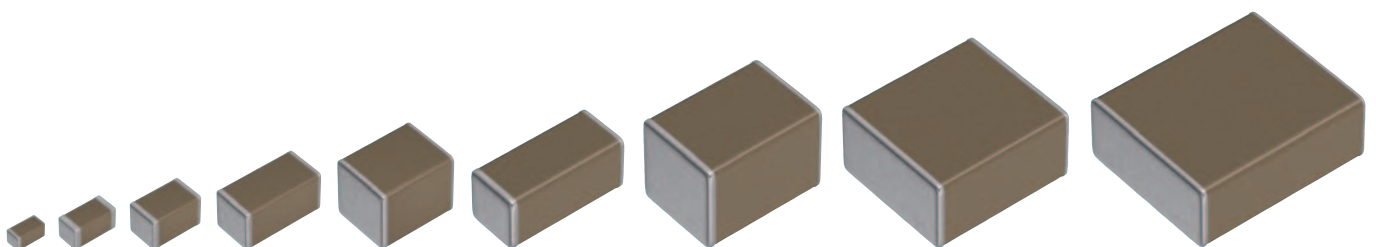

REMINDERS FOR USING THESE PRODUCTS

Before using these products, be sure to request the delivery specifications.

SAFETY REMINDERS

Please pay sufficient attention to the warnings for safe designing when using this product.

REMINDERS

1. The products listed on this catalog are intended for use in general electronic equipment (AV equipment, telecommunications equipment, home appliances, amusement equipment, computer equipment, personal equipment, office equipment, measurement equipment, industrial robots) under a normal operation and use condition.

The products are not designed or warranted to meet the requirements of the applications listed below, whose performance and/or quality require a more stringent level of safety or reliability, or whose failure, malfunction or trouble could cause serious damage to society, person or property.

If you intend to use the products in the applications listed below or if you have special requirements exceeding the range or conditions set forth in the each catalog, please contact us.

- | | |
|---|--|
| (1) Aerospace/aviation equipment | (8) Public information-processing equipment |
| (2) Transportation equipment (cars, electric trains, ships, etc.) | (9) Military equipment |
| (3) Medical equipment | (10) Electric heating apparatus, burning equipment |
| (4) Power-generation control equipment | (11) Disaster prevention/crime prevention equipment |
| (5) Atomic energy-related equipment | (12) Safety equipment |
| (6) Seabed equipment | (13) Other applications that are not considered general-purpose applications |
| (7) Transportation control equipment | |

When designing your equipment even for general-purpose applications, you are kindly requested to take into consideration securing protection circuit/device or providing backup circuits in your equipment.

- We may modify products or discontinue production of a product listed in this catalog without prior notification.
- We provide "Delivery Specification" that explain precautions for the specifications and safety of each product listed in this catalog. We strongly recommend that you exchange these delivery specifications with customers that use one of these products.
- If you plan to export a product listed in this catalog, keep in mind that it may be a restricted item according to the "Foreign Exchange and Foreign Trade Control Law". In such cases, it is necessary to acquire export permission in harmony with this law.
- Any reproduction or transferring of the contents of this catalog is prohibited without prior permission from our company.
- We are not responsible for problems that occur related to the intellectual property rights or other rights of our company or a third party when you use a product listed in this catalog. We do not grant license of these rights.
- This catalog only applies to products purchased through our company or one of our company's official agencies. This catalog does not apply to products that are purchased through other third parties.

Notice: Effective January 2013, TDK will use a new catalog number which adds product thickness and packaging specification detail. This new catalog number should be referenced on all catalog orders going forward, and is not applicable for OEM part number orders.

Please be aware the last five digits of the catalog number will differ from the item description (internal control number) on the product label.

Contact your local TDK Sales representative for more information.

(Example)

| Catalog issued date | Catalog number | Item description (on delivery label) |
|------------------------|-----------------------|--------------------------------------|
| Prior to December 2012 | C1608C0G1E103J(080AA) | C1608C0G1E103JT000N |
| January 2013 and later | C1608C0G1E103J080AA | C1608C0G1E103JT000N |

C series

Soft termination



Type: C1005 [0402 inch], C1608 [0603 inch], C2012 [0805 inch],
C3216 [1206 inch], C3225 [1210 inch], C4520 [1808 inch],
C4532 [1812 inch], C5750 [2220 inch], C7563 [3025 inch]


SERIES OVERVIEW

TDK multilayer ceramic chip capacitor_Soft termination_General grade_C series is a product which conductive resin layers are included in terminations. Soft termination series has higher mechanical endurance by the flexible resin layers which absorbs thermal and mechanical stress.

FEATURES

- Higher mechanical endurance is realized by flexible resin layers.
- X8R type which maximum temperature is up to 150°C is applicable.
- COG temperature characteristic which has excellent stable temperature and DC-bias characteristics is applicable.

SHAPE & DIMENSIONS




| | |
|---|------------------|
| L | Body length |
| W | Body width |
| T | Body height |
| B | Terminal width |
| G | Terminal spacing |

APPLICATIONS

- Fail-safe design in battery line.
- Prevention of ceramic body cracks by board bending.
- Prevention of solder cracks by thermal shock.
- The set having a high probability of fall.


ELECTRODE STRUCTURE DRAWING

Standard termination



Termination consists of 3 layers by Cu, Ni and Sn.

Soft termination

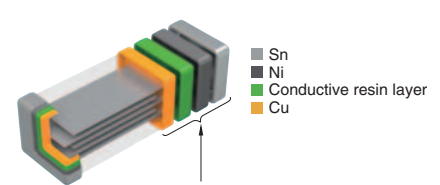

Termination consists of 4 layers including conductive resin layer.

Dimensions in mm

| Type | L | W | T | B | G |
|-------|-----------------|-----------------|-----------------|-----------|-----------|
| C1005 | 1.00+0.15,-0.05 | 0.50+0.10,-0.05 | 0.50+0.10,-0.05 | 0.10 min. | 0.30 min. |
| C1608 | 1.60+0.20,-0.10 | 0.80+0.15,-0.10 | 0.80+0.15,-0.10 | 0.20 min. | 0.30 min. |
| C2012 | 2.00+0.45,-0.20 | 1.25+0.25,-0.20 | 1.25+0.25,-0.20 | 0.20 min. | 0.50 min. |
| C3216 | 3.20+0.40,-0.20 | 1.60+0.30,-0.20 | 1.60+0.30,-0.20 | 0.20 min. | 1.00 min. |
| C3225 | 3.20+0.50,-0.40 | 2.50±0.30 | 2.50±0.30 | 0.20 min. | — |
| C4520 | 4.50+0.50,-0.40 | 2.00+0.30,-0.20 | 1.30±0.20 | 0.20 min. | — |
| C4532 | 4.50+0.50,-0.40 | 3.20±0.40 | 2.50±0.30 | 0.20 min. | — |
| C5750 | 5.70+0.50,-0.40 | 5.00±0.40 | 2.50±0.30 | 0.20 min. | — |
| C7563 | 7.50±0.50 | 6.30±0.50 | 3.00 max. | 0.30 min. | — |

* Dimensional tolerances are typical values.

CATALOG NUMBER CONSTRUCTION

| | | | | | | | | |
|----------|-------------|------------|-----------|------------|----------|------------|----------|----------|
| C | 7563 | X7S | 1C | 107 | M | 280 | L | E |
| (1) | (2) | (3) | (4) | (5) | (6) | (7) | (8) | (9) |

(1) Series

(2) Dimensions L x W (mm)

| Code | EIA | Length | Width | Terminal width |
|------|--------|--------|-------|----------------|
| 1005 | CC0402 | 1.00 | 0.50 | 0.10 |
| 1608 | CC0603 | 1.60 | 0.80 | 0.20 |
| 2012 | CC0805 | 2.00 | 1.25 | 0.20 |
| 3216 | CC1206 | 3.20 | 1.60 | 0.20 |
| 3225 | CC1210 | 3.20 | 2.50 | 0.20 |
| 4520 | CC1808 | 4.50 | 2.00 | 0.20 |
| 4532 | CC1812 | 4.50 | 3.20 | 0.20 |
| 5750 | CC2220 | 5.70 | 5.00 | 0.20 |
| 7563 | CC3025 | 7.50 | 6.30 | 0.30 |

(3) Temperature characteristics

| Temperature characteristics | Temperature coefficient or capacitance change | Temperature range |
|-----------------------------|---|-------------------|
| C0G | 0±30 ppm/°C | -55 to +125°C |
| X5R | ±15% | -55 to +85°C |
| X7R | ±15% | -55 to +125°C |
| X7S | ±22% | -55 to +125°C |
| X7T | +22,-33% | -55 to +125°C |
| X8R | ±15% | -55 to +150°C |

(4) Rated voltage (DC)

| Code | Voltage (DC) |
|------|--------------|
| 0J | 6.3V |
| 1A | 10V |
| 1C | 16V |
| 1E | 25V |
| 1V | 35V |
| 1H | 50V |
| 2A | 100V |
| 2E | 250V |
| 2W | 450V |
| 2J | 630V |
| 3A | 1000V |
| 3D | 2000V |
| 3F | 3000V |

(5) Nominal capacitance (pF)

The capacitance is expressed in three digit codes and in units of pico Farads (pF). The first and second digits identify the first and second significant figures of the capacitance. The third digit identifies the multiplier. R designates a decimal point.

(Example)OR5 = 0.5pF
 101 = 100pF
 225 = 2,200,000pF = 2.2μF

(6) Capacitance tolerance

| Code | Tolerance |
|------|-----------|
| J | ±5% |
| K | ±10% |
| M | ±20% |

(7) Thickness

| Code | Thickness |
|------|-----------|
| 050 | 0.50 mm |
| 060 | 0.60 mm |
| 080 | 0.80 mm |
| 085 | 0.85 mm |
| 115 | 1.15 mm |
| 125 | 1.25 mm |
| 130 | 1.30 mm |
| 160 | 1.60 mm |
| 200 | 2.00 mm |
| 230 | 2.30 mm |
| 250 | 2.50 mm |
| 280 | 2.80 mm |

(8) Packaging style

| Code | Style |
|------|------------------------|
| A | 178mm reel, 4mm pitch |
| B | 178mm reel, 2mm pitch |
| K | 178mm reel, 8mm pitch |
| L | 330mm reel, 12mm pitch |

(9) Special reserved code




| Code | Description |
|------|------------------|
| E | Soft termination |

Capacitance range chart

C1005 [0402 inch]

| Capacitance | | COG | | X5R | | | | X7R | | | |
|-------------|------|--------------|-------------|-------------|-------------|-------------|--------------|-------------|-------------|-------------|-------------|
| (pF) | Code | 2A (100V) | 1H (50V) | 1V (35V) | 1E (25V) | 1A (10V) | 0J (6.3V) | 1H (50V) | 1V (35V) | 1E (25V) | 1C (16V) |
| 100 | 101 | ■ | ■ | | | | | | | | |
| 150 | 151 | ■ | ■ | | | | | | | | |
| 220 | 221 | ■ | ■ | | | | | | | | |
| 330 | 331 | ■ | ■ | | | | | | | | |
| 470 | 471 | ■ | ■ | | | | | | | | |
| 680 | 681 | ■ | ■ | | | | | | | | |
| 1,000 | 102 | ■ | ■ | | | | | ■ | | | |
| 2,200 | 222 | | | | | | | ■ | | | |
| 4,700 | 472 | | | | | | | ■ | | | |
| 10,000 | 103 | | | | | | | ■ | | | |
| 22,000 | 223 | | | | | | | ■ | | | |
| 47,000 | 473 | | | | | | | ■ | | | |
| 100,000 | 104 | | | | | | | ■ | ■ | ■ | ■ |
| 220,000 | 224 | | | | | | | ■ | ■ | ■ | ■ |
| 470,000 | 474 | | | ■ | ■ | | | | | | |
| 1,000,000 | 105 | | | ■ | ■ | | | | | | |
| 2,200,000 | 225 | | | ■ | ■ | | | | | | |
| 4,700,000 | 475 | | | ■ | ■ | ■ | ■ | | | | |

| Capacitance | | X8R | | | |
|-------------|------|--------------|-------------|-------------|-------------|
| (pF) | Code | 2A (100V) | 1H (50V) | 1E (25V) | 1C (16V) |
| 150 | 151 | ■ | ■ | | |
| 220 | 221 | ■ | ■ | | |
| 330 | 331 | ■ | ■ | | |
| 470 | 471 | ■ | ■ | | |
| 680 | 681 | ■ | ■ | | |
| 1,000 | 102 | ■ | ■ | | |
| 1,500 | 152 | ■ | ■ | | |
| 2,200 | 222 | ■ | ■ | | |
| 3,300 | 332 | ■ | ■ | | |
| 4,700 | 472 | ■ | ■ | | |
| 6,800 | 682 | | | ■ | |
| 10,000 | 103 | | ■ | ■ | |
| 15,000 | 153 | | ■ | ■ | |
| 22,000 | 223 | | | ■ | |
| 33,000 | 333 | | | ■ | ■ |
| 47,000 | 473 | | | ■ | ■ |

Standard thickness  0.50 mm Background gray: The product which is not recommended to a new design. Please refer to the capacitance range table after P-11 for the details such as product thickness and capacitance tolerance.

MULTILAYER CERAMIC CHIP CAPACITORS TDK

Capacitance range chart

C1608 [0603 inch]

| Capacitance | | C0G | | | X5R | | | | | X7R | | | | |
|-------------|------|-----------|-----------|----------|----------|----------|----------|----------|-----------|-----------|----------|----------|----------|----------|
| (pF) | Code | 2E (250V) | 2A (100V) | 1H (50V) | 1V (35V) | 1E (25V) | 1C (16V) | 1A (10V) | 0J (6.3V) | 2A (100V) | 1H (50V) | 1V (35V) | 1E (25V) | 1A (10V) |
| 100 | 101 | | | | | | | | | | | | | |
| 330 | 331 | | | | | | | | | | | | | |
| 470 | 471 | | | | | | | | | | | | | |
| 680 | 681 | | | | | | | | | | | | | |
| 1,000 | 102 | | | | | | | | | | | | | |
| 1,200 | 122 | | | | | | | | | | | | | |
| 1,500 | 152 | | | | | | | | | | | | | |
| 1,800 | 182 | | | | | | | | | | | | | |
| 2,200 | 222 | | | | | | | | | | | | | |
| 2,700 | 272 | | | | | | | | | | | | | |
| 3,300 | 332 | | | | | | | | | | | | | |
| 3,900 | 392 | | | | | | | | | | | | | |
| 4,700 | 472 | | | | | | | | | | | | | |
| 5,600 | 562 | | | | | | | | | | | | | |
| 6,800 | 682 | | | | | | | | | | | | | |
| 8,200 | 822 | | | | | | | | | | | | | |
| 10,000 | 103 | | | | | | | | | | | | | |
| 22,000 | 223 | | | | | | | | | | | | | |
| 47,000 | 473 | | | | | | | | | | | | | |
| 100,000 | 104 | | | | | | | | | | | | | |
| 220,000 | 224 | | | | | | | | | | | | | |
| 470,000 | 474 | | | | | | | | | | | | | |
| 1,000,000 | 105 | | | | | | | | | | | | | |
| 2,200,000 | 225 | | | | | | | | | | | | | |
| 4,700,000 | 475 | | | | | | | | | | | | | |
| 10,000,000 | 106 | | | | | | | | | | | | | |

| Capacitance | | X7S | | X8R | | |
|-------------|------|-----------|-----------|----------|----------|----------|
| (pF) | Code | 2A (100V) | 2A (100V) | 1H (50V) | 1E (25V) | 1C (16V) |
| 1,000 | 102 | | | | | |
| 1,500 | 152 | | | | | |
| 2,200 | 222 | | | | | |
| 3,300 | 332 | | | | | |
| 4,700 | 472 | | | | | |
| 6,800 | 682 | | | | | |
| 10,000 | 103 | | | | | |
| 15,000 | 153 | | | | | |
| 22,000 | 223 | | | | | |
| 33,000 | 333 | | | | | |
| 47,000 | 473 | | | | | |
| 68,000 | 683 | | | | | |
| 100,000 | 104 | | | | | |
| 150,000 | 154 | | | | | |
| 220,000 | 224 | | | | | |
| 330,000 | 334 | | | | | |
| 470,000 | 474 | | | | | |

Standard thickness 0.8 mm

Background gray: The product which is not recommended to a new design.

Please refer to the capacitance range table after P-11 for the details such as product thickness and capacitance tolerance.

Please be sure to request delivery specifications that provide further details on the features and specifications of the products for proper and safe use. Please note that the contents may change without any prior notice due to reasons such as upgrading.

MULTILAYER CERAMIC CHIP CAPACITORS TDK

Capacitance range chart

C2012 [0805 inch]

| Capacitance | | C0G | | | | X7R | | | | | | X7S | |
|-------------|------|-----------|-----------|-----------|----------|-----------|-----------|----------|----------|----------|----------|----------|-----------|
| (pF) | Code | 2W (450V) | 2E (250V) | 2A (100V) | 1H (50V) | 2E (250V) | 2A (100V) | 1H (50V) | 1V (35V) | 1E (25V) | 1C (16V) | 1A (10V) | 2A (100V) |
| 100 | 101 | 0.60 | | | | | | | | | | | |
| 150 | 151 | 0.60 | | | | | | | | | | | |
| 220 | 221 | 0.60 | | | | | | | | | | | |
| 330 | 331 | 0.60 | | | | | | | | | | | |
| 470 | 471 | 0.60 | | | | | | | | | | | |
| 680 | 681 | 0.60 | | | | | | | | | | | |
| 1,000 | 102 | 0.60 | | | | 0.85 | 0.85 | | | | | | |
| 1,200 | 122 | 0.60 | | | | | | | | | | | |
| 1,500 | 152 | 0.60 | | | | | | | | | | | |
| 1,800 | 182 | 0.60 | | | | 0.85 | 0.85 | | | | | | |
| 2,200 | 222 | 0.60 | | | | | | | | | | | |
| 2,700 | 272 | 0.60 | | | | | | | | | | | |
| 3,300 | 332 | 0.60 | 0.85 | | | | | | | | | | |
| 3,900 | 392 | 0.60 | 0.85 | | | | | | | | | | |
| 4,700 | 472 | 0.60 | 0.85 | | | 0.85 | 0.85 | | | | | | |
| 5,600 | 562 | | 0.85 | | | | | | | | | | |
| 6,800 | 682 | | 0.85 | | | | | | | | | | |
| 10,000 | 103 | | | | | 0.85 | 0.85 | | | | | | |
| 15,000 | 153 | | | 0.85 | 0.85 | | | | | | | | |
| 22,000 | 223 | | | 0.85 | 0.85 | 0.85 | 0.85 | | | | | | |
| 33,000 | 333 | | | 0.85 | 0.85 | | | | | | | | |
| 47,000 | 473 | | | | | | 0.85 | | | | | | |
| 100,000 | 104 | | | | | | | 0.85 | | | | | |
| 220,000 | 224 | | | | | | | | 0.85 | | | | 0.85 |
| 470,000 | 474 | | | | | | | | 0.85 | | | | 0.85 |
| 1,000,000 | 105 | | | | | | | | 0.85 | 0.85 | | | 0.85 |
| 2,200,000 | 225 | | | | | | | | 0.85 | 0.85 | | | 0.85 |
| 4,700,000 | 475 | | | | | | | | 0.85 | 0.85 | | | 0.85 |
| 10,000,000 | 106 | | | | | | | | 0.85 | 0.85 | | | 0.85 |

| Capacitance | | X7T | | X8R | | | |
|-------------|------|-----------|-----------|-----------|----------|----------|----------|
| (pF) | Code | 2W (450V) | 2E (250V) | 2A (100V) | 1H (50V) | 1E (25V) | 1C (16V) |
| 10,000 | 103 | 0.85 | | | | | |
| 22,000 | 223 | 0.85 | | | | | |
| 33,000 | 333 | | | 0.85 | | | |
| 47,000 | 473 | 0.85 | 0.85 | | | | |
| 68,000 | 683 | | | 0.85 | 0.85 | | |
| 100,000 | 104 | | 0.85 | | | | |
| 150,000 | 154 | | | | 0.85 | 0.85 | |
| 220,000 | 224 | | | | 0.85 | 0.85 | |
| 330,000 | 334 | | | | | 0.85 | |
| 470,000 | 474 | | | | | 0.85 | |
| 680,000 | 684 | | | | | 0.85 | 0.85 |
| 1,000,000 | 105 | | | | | 0.85 | 0.85 |

Standard thickness ■ 0.60 mm ■ 0.85 mm ■ 1.25 mm

Background gray: The product which is not recommended to a new design.

Please refer to the capacitance range table after P-11 for the details such as product thickness and capacitance tolerance.

⚠ Please be sure to request delivery specifications that provide further details on the features and specifications of the products for proper and safe use. Please note that the contents may change without any prior notice due to reasons such as upgrading.

MULTILAYER CERAMIC CHIP CAPACITORS TDK

Capacitance range chart

C3216 [1206 inch]

| Capacitance | | C0G | | | | | X7R | | | | | | | X7S |
|-------------|------|--------------|--------------|--------------|--------------|-------------|--------------|--------------|--------------|-------------|-------------|-------------|-------------|--------------|
| (pF) | Code | 2J (630V) | 2W (450V) | 2E (250V) | 2A (100V) | 1H (50V) | 2J (630V) | 2E (250V) | 2A (100V) | 1H (50V) | 1V (35V) | 1E (25V) | 1C (16V) | 2A (100V) |
| 1,000 | 102 | | | | | | 1.15 | | | | | | | |
| 2,200 | 222 | | | | | | 1.15 | | | | | | | |
| 3,300 | 332 | | | | | | 1.15 | | | | | | | |
| 3,900 | 392 | 0.85 | | | | | 1.15 | | | | | | | |
| 4,700 | 472 | | | | | | 1.15 | | | | | | | |
| 5,600 | 562 | 1.15 | | | | | 1.15 | | | | | | | |
| 6,800 | 682 | 1.15 | 1.15 | | | | | | | | | | | |
| 8,200 | 822 | 1.15 | 1.15 | 1.15 | | | | | | | | | | |
| 10,000 | 103 | 1.15 | 1.15 | 1.15 | | | 1.15 | | | | | | | |
| 15,000 | 153 | | | 1.15 | | | | | | | | | | |
| 22,000 | 223 | | | | | | 1.30 | 1.15 | | | | | | |
| 33,000 | 333 | | | | | | 1.15 | 1.15 | | | | | | |
| 47,000 | 473 | | | | 1.15 | 1.15 | | 1.15 | | | | | | |
| 68,000 | 683 | | | | 1.15 | 1.15 | | | | | | | | |
| 100,000 | 104 | | | | 1.15 | 1.15 | | 1.15 | 1.15 | | | | | |
| 220,000 | 224 | | | | | | | | 1.15 | | | | | |
| 470,000 | 474 | | | | | | | | 1.15 | | | | | |
| 1,000,000 | 105 | | | | | | | | 1.15 | 1.15 | | | | |
| 2,200,000 | 225 | | | | | | | | | 1.15 | 1.15 | 1.15 | | 1.15 |
| 4,700,000 | 475 | | | | | | | | | 1.15 | 1.15 | 1.15 | 1.15 | 1.15 |
| 10,000,000 | 106 | | | | | | | | | | 1.15 | 1.15 | 1.15 | 1.15 |

| Capacitance | | X7T | | | | X8R | | |
|-------------|------|--------------|--------------|--------------|--------------|-------------|-------------|-------------|
| (pF) | Code | 2J (630V) | 2W (450V) | 2E (250V) | 2A (100V) | 1H (50V) | 1E (25V) | 1C (16V) |
| 47,000 | 473 | 1.15 | | | | | | |
| 100,000 | 104 | | 1.15 | | 1.15 | | | |
| 150,000 | 154 | | | | 1.15 | | | |
| 220,000 | 224 | | | 1.15 | | | | |
| 330,000 | 334 | | | | 1.15 | 1.15 | | |
| 470,000 | 474 | | | | | 1.15 | | |
| 680,000 | 684 | | | | | 1.15 | | |
| 1,000,000 | 105 | | | | | 1.15 | 1.15 | |
| 1,500,000 | 155 | | | | | | 1.15 | |
| 2,200,000 | 225 | | | | | | | 1.15 |
| 3,300,000 | 335 | | | | | | | 1.15 |
| 4,700,000 | 475 | | | | | | | 1.15 |

Standard thickness 0.85 mm 1.15 mm 1.30 mm 1.60 mm

Background gray: The product which is not recommended to a new design.

■ Please refer to the capacitance range table after P-11 for the details such as product thickness and capacitance tolerance.

⚠ Please be sure to request delivery specifications that provide further details on the features and specifications of the products for proper and safe use.
Please note that the contents may change without any prior notice due to reasons such as upgrading.

MULTILAYER CERAMIC CHIP CAPACITORS TDK

Capacitance range chart

C3225 [1210 inch]

| Capacitance | | C0G | | | | | X7R | | | | X7S | |
|-------------|------|----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|----------|-----------|----------|
| (pF) | Code | 3A (1kV) | 2J (630V) | 2W (450V) | 2E (250V) | 2A (100V) | 2J (630V) | 2E (250V) | 2A (100V) | 1H (50V) | 2A (100V) | 1H (50V) |
| 1,000 | 102 | █ | | | | | | | | | | |
| 1,200 | 122 | █ | | | | | | | | | | |
| 1,500 | 152 | █ | | | | | | | | | | |
| 1,800 | 182 | █ | | | | | | | | | | |
| 2,200 | 222 | █ | | | | | | | | | | |
| 2,700 | 272 | █ | | | | | | | | | | |
| 3,300 | 332 | █ | | | | | | | | | | |
| 3,900 | 392 | █ | | | | | | | | | | |
| 4,700 | 472 | █ | | | | | | | | | | |
| 5,600 | 562 | █ | | | | | | | | | | |
| 6,800 | 682 | █ | | | | | | | | | | |
| 8,200 | 822 | █ | | | | | | | | | | |
| 15,000 | 153 | | █ | | | | | | | | | |
| 22,000 | 223 | | █ | | █ | | | | | | | |
| 33,000 | 333 | | █ | █ | | | | | | | | |
| 47,000 | 473 | | | | | | █ | | | | | |
| 68,000 | 683 | | | | | █ | | | | | | |
| 100,000 | 104 | | | | | | | █ | | | | |
| 220,000 | 224 | | | | | | | | █ | | | |
| 470,000 | 474 | | | | | | | | █ | | | |
| 1,000,000 | 105 | | | | | | | | | █ | | |
| 2,200,000 | 225 | | | | | | | | | █ | | |
| 3,300,000 | 335 | | | | | | | | | | █ | |
| 4,700,000 | 475 | | | | | | | | | | █ | |
| 10,000,000 | 106 | | | | | | | | | | █ | |

| Capacitance | | X7T | | | X8R | | |
|-------------|------|-----------|-----------|-----------|-----------|----------|----------|
| (pF) | Code | 2J (630V) | 2W (450V) | 2E (250V) | 2A (100V) | 1E (25V) | 1C (16V) |
| 100,000 | 104 | █ | | | | | |
| 150,000 | 154 | █ | | | | | |
| 220,000 | 224 | | █ | | | | |
| 330,000 | 334 | | | █ | | | |
| 470,000 | 474 | | | | █ | | |
| 680,000 | 684 | | | | | █ | |
| 3,300,000 | 335 | | | | | | █ |
| 4,700,000 | 475 | | | | | | █ |
| 10,000,000 | 106 | | | | | | █ |

Standard thickness 1.60 mm 2.00 mm 2.30 mm 2.50 mm

■ Please refer to the capacitance range table after P-11 for the details such as product thickness and capacitance tolerance.

Capacitance range chart

C4520 [1808 inch]

| Capacitance | | X7R |
|-------------|------|----------|
| (pF) | Code | 3D (2kV) |
| 1,000 | 102 | █ |

Standard thickness 1.30 mm

■ Please refer to the capacitance range table after P-11 for the details such as product thickness and capacitance tolerance.

⚠ Please be sure to request delivery specifications that provide further details on the features and specifications of the products for proper and safe use. Please note that the contents may change without any prior notice due to reasons such as upgrading.

Capacitance range chart

C4532 [1812 inch]

| Capacitance | | C0G | | X7R | | | X7T | | |
|-------------|------|-------------|--------------|-------------|--------------|--------------|--------------|--------------|--------------|
| (pF) | Code | 3F (3kV) | 2J (630V) | 3D (2kV) | 2J (630V) | 2E (250V) | 2J (630V) | 2W (450V) | 2E (250V) |
| 330 | 331 | | | | | | | | |
| 2,200 | 222 | | | | | | | | |
| 33,000 | 333 | | | | | | | | |
| 100,000 | 104 | | | | | | | | |
| 220,000 | 224 | | | | | | | | |
| 470,000 | 474 | | | | | | | | |
| 1,000,000 | 105 | | | | | | | | |

Standard thickness 1.30 mm 2.00 mm 2.30 mm 2.50 mm

■ Please refer to the capacitance range table after P-11 for the details such as product thickness and capacitance tolerance.

Capacitance range chart

C5750 [2220 inch]

| Capacitance | | C0G | | | X7R | | X7S | X7T | | |
|-------------|------|--------------|--------------|--------------|--------------|--------------|--------------|--------------|--------------|--------------|
| (pF) | Code | 2J (630V) | 2E (250V) | 2A (100V) | 2J (630V) | 2E (250V) | 2A (100V) | 2J (630V) | 2W (450V) | 2E (250V) |
| 68,000 | 683 | | | | | | | | | |
| 150,000 | 154 | | | | | | | | | |
| 220,000 | 224 | | | | | | | | | |
| 470,000 | 474 | | | | | | | | | |
| 1,000,000 | 105 | | | | | | | | | |
| 2,200,000 | 225 | | | | | | | | | |
| 10,000,000 | 106 | | | | | | | | | |

Standard thickness 2.30 mm 2.50 mm

■ Please refer to the capacitance range table after P-11 for the details such as product thickness and capacitance tolerance.

Capacitance range chart

C7563 [3025 inch]

| Capacitance | | X7R | | X7S | |
|-------------|------|-------------|-------------|-------------|--|
| (pF) | Code | 1E (25V) | 1H (50V) | 1C (16V) | |
| 22,000,000 | 226 | | | | |
| 47,000,000 | 476 | | | | |
| 100,000,000 | 107 | | | | |

Standard thickness 2.30 mm 2.80 mm

■ Please refer to the capacitance range table after P-11 for the details such as product thickness and capacitance tolerance.

MULTILAYER CERAMIC CHIP CAPACITORS



Capacitance range table

Temperature characteristics: C0G (-55 to +125°C, 0±30ppm/°C)

| Capacitance | Dimensions | Thickness (mm) | Capacitance tolerance | Catalog number | | | |
|-------------|------------|-------------------|--------------------------|------------------------|------------------------|-------------------------|-------------------------|
| | | | | Rated voltage Edc: 3kV | Rated voltage Edc: 1kV | Rated voltage Edc: 630V | Rated voltage Edc: 450V |
| 100pF | 2012 | 0.60±0.15 | ±5% | | | | C2012C0G2W101J060AE |
| 150pF | 2012 | 0.60±0.15 | ±5% | | | | C2012C0G2W151J060AE |
| 220pF | 2012 | 0.60±0.15 | ±5% | | | | C2012C0G2W221J060AE |
| 330pF | 2012 | 0.60±0.15 | ±5% | | | | C2012C0G2W331J060AE |
| | 4532 | 2.50±0.30 | ±10% | C4532C0G3F331K250KE | | | |
| 470pF | 2012 | 0.60±0.15 | ±5% | | | | C2012C0G2W471J060AE |
| 680pF | 2012 | 0.60±0.15 | ±5% | | | | C2012C0G2W681J060AE |
| 1nF | 2012 | 0.60±0.15 | ±5% | | | | C2012C0G2W102J060AE |
| | 3225 | 2.00+0.30,-0.20 | ±5% | | C3225C0G3A102J200AE | | |
| 1.2nF | 2012 | 0.60±0.15 | ±5% | | | | C2012C0G2W122J060AE |
| | 3225 | 2.00+0.30,-0.20 | ±5% | | C3225C0G3A122J200AE | | |
| 1.5nF | 2012 | 0.85±0.15 | ±5% | | | | C2012C0G2W152J085AE |
| | 3225 | 2.00+0.30,-0.20 | ±5% | | C3225C0G3A152J200AE | | |
| 1.8nF | 2012 | 0.85±0.15 | ±5% | | | | C2012C0G2W182J085AE |
| | 3225 | 2.00+0.30,-0.20 | ±5% | | C3225C0G3A182J200AE | | |
| 2.2nF | 2012 | 0.85±0.15 | ±5% | | | | C2012C0G2W222J085AE |
| | 3225 | 2.00+0.30,-0.20 | ±5% | | C3225C0G3A222J200AE | | |
| 2.7nF | 2012 | 1.25+0.25,-0.20 | ±5% | | | | C2012C0G2W272J125AE |
| | 3225 | 2.00+0.30,-0.20 | ±5% | | C3225C0G3A272J200AE | | |
| 3.3nF | 2012 | 1.25+0.25,-0.20 | ±5% | | | | C2012C0G2W332J125AE |
| | 3225 | 2.00+0.30,-0.20 | ±5% | | C3225C0G3A332J200AE | | |
| 3.9nF | 2012 | 1.25+0.25,-0.20 | ±5% | | | | C2012C0G2W392J125AE |
| | 3216 | 0.85±0.15 | ±5% | | | C3216C0G2J392J085AE | |
| | 3225 | 2.00+0.30,-0.20 | ±5% | | C3225C0G3A392J200AE | | |
| 4.7nF | 3225 | 2.00+0.30,-0.20 | ±5% | | C3225C0G3A472J200AE | | |
| | 3216 | 1.15±0.15 | ±5% | | | C3216C0G2J562J115AE | |
| 5.6nF | 3225 | 2.00+0.30,-0.20 | ±5% | | C3225C0G3A562J200AE | | |
| | 3216 | 1.15±0.15 | ±5% | | | C3216C0G2J682J115AE | C3216C0G2W682J115AE |
| 6.8nF | 3225 | 2.00+0.30,-0.20 | ±5% | | C3225C0G3A682J200AE | | |
| | 3216 | 1.15±0.15 | ±5% | | | | C3216C0G2W822J115AE |
| 8.2nF | 3225 | 2.30+0.30,-0.20 | ±5% | | C3225C0G3A822J230AE | | |
| | 3216 | 1.60+0.30,-0.20 | ±5% | | | C3216C0G2J822J160AE | |
| 10nF | 3216 | 1.60+0.30,-0.20 | ±5% | | | C3216C0G2J103J160AE | C3216C0G2W103J160AE |
| 15nF | 3225 | 1.60+0.30,-0.20 | ±5% | | | C3225C0G2J153J160AE | |
| 33nF | 3225 | 2.50±0.30 | ±5% | | | | C3225C0G2W333J250AE |
| | 4532 | 2.00+0.30,-0.20 | ±5% | | C4532C0G2J333J200KE | | |
| 68nF | 5750 | 2.30+0.30,-0.20 | ±5% | | | | C5750C0G2J683J230KE |

⚠ Please be sure to request delivery specifications that provide further details on the features and specifications of the products for proper and safe use.
Please note that the contents may change without any prior notice due to reasons such as upgrading.

MULTILAYER CERAMIC CHIP CAPACITORS



Capacitance range table

Temperature characteristics: C0G (-55 to +125°C, 0±30ppm/°C)

| Capacitance | Dimensions | Thickness (mm) | Capacitance tolerance | Catalog number | | |
|-------------|------------|-----------------|-----------------------|-------------------------|-------------------------|------------------------|
| | | | | Rated voltage Edc: 250V | Rated voltage Edc: 100V | Rated voltage Edc: 50V |
| 100pF | 1005 | 0.50+0.10,-0.05 | ±5% | | C1005C0G2A101J050BE | C1005C0G1H101J050BE |
| | 1608 | 0.80+0.15,-0.10 | ±5% | | | C1608C0G1H101J080AE |
| 150pF | 1005 | 0.50+0.10,-0.05 | ±5% | | C1005C0G2A151J050BE | C1005C0G1H151J050BE |
| 220pF | 1005 | 0.50+0.10,-0.05 | ±5% | | C1005C0G2A221J050BE | C1005C0G1H221J050BE |
| 330pF | 1005 | 0.50+0.10,-0.05 | ±5% | | C1005C0G2A331J050BE | C1005C0G1H331J050BE |
| | 1608 | 0.80+0.15,-0.10 | ±5% | | C1608C0G2A331J080AE | C1608C0G1H331J080AE |
| 470pF | 1005 | 0.50+0.10,-0.05 | ±5% | | C1005C0G2A471J050BE | C1005C0G1H471J050BE |
| | 1608 | 0.80+0.15,-0.10 | ±5% | | C1608C0G2A471J080AE | C1608C0G1H471J080AE |
| 680pF | 1005 | 0.50+0.10,-0.05 | ±5% | | C1005C0G2A681J050BE | C1005C0G1H681J050BE |
| | 1608 | 0.80+0.15,-0.10 | ±5% | | C1608C0G2A681J080AE | C1608C0G1H681J080AE |
| 1nF | 1005 | 0.50+0.10,-0.05 | ±5% | | C1005C0G2A102J050BE | C1005C0G1H102J050BE |
| | 1608 | 0.80+0.15,-0.10 | ±5% | C1608C0G2E102J080AE | C1608C0G2A102J080AE | C1608C0G1H102J080AE |
| 1.2nF | 1608 | 0.80+0.15,-0.10 | ±5% | C1608C0G2E122J080AE | C1608C0G2A122J080AE | C1608C0G1H122J080AE |
| 1.5nF | 1608 | 0.80+0.15,-0.10 | ±5% | C1608C0G2E152J080AE | C1608C0G2A152J080AE | C1608C0G1H152J080AE |
| 1.8nF | 1608 | 0.80+0.15,-0.10 | ±5% | C1608C0G2E182J080AE | C1608C0G2A182J080AE | C1608C0G1H182J080AE |
| 2.2nF | 1608 | 0.80+0.15,-0.10 | ±5% | | C1608C0G2A222J080AE | C1608C0G1H222J080AE |
| 2.7nF | 1608 | 0.80+0.15,-0.10 | ±5% | | C1608C0G2A272J080AE | C1608C0G1H272J080AE |
| 3.3nF | 1608 | 0.80+0.15,-0.10 | ±5% | | C1608C0G2A332J080AE | C1608C0G1H332J080AE |
| | 2012 | 0.85±0.15 | ±5% | C2012C0G2E332J085AE | | |
| 3.9nF | 1608 | 0.80+0.15,-0.10 | ±5% | | C1608C0G2A392J080AE | C1608C0G1H392J080AE |
| | 2012 | 1.25+0.25,-0.20 | ±5% | C2012C0G2E392J125AE | | |
| 4.7nF | 1608 | 0.80+0.15,-0.10 | ±5% | | C1608C0G2A472J080AE | C1608C0G1H472J080AE |
| | 2012 | 1.25+0.25,-0.20 | ±5% | C2012C0G2E472J125AE | | |
| 5.6nF | 1608 | 0.80+0.15,-0.10 | ±5% | | C1608C0G2A562J080AE | C1608C0G1H562J080AE |
| | 2012 | 1.25+0.25,-0.20 | ±5% | C2012C0G2E562J125AE | | |
| 6.8nF | 1608 | 0.80+0.15,-0.10 | ±5% | | C1608C0G2A682J080AE | C1608C0G1H682J080AE |
| | 2012 | 1.25+0.25,-0.20 | ±5% | C2012C0G2E682J125AE | | |
| 8.2nF | 1608 | 0.80+0.15,-0.10 | ±5% | | C1608C0G2A822J080AE | C1608C0G1H822J080AE |
| | 1608 | 0.80+0.15,-0.10 | ±5% | | C1608C0G2A103J080AE | C1608C0G1H103J080AE |
| 10nF | 3216 | 1.15±0.15 | ±5% | C3216C0G2E103J115AE | | |
| | 2012 | 0.85±0.15 | ±5% | | C2012C0G2A153J085AE | C2012C0G1H153J085AE |
| 15nF | 3216 | 1.60+0.30,-0.20 | ±5% | C3216C0G2E153J160AE | | |
| | 2012 | 1.25+0.25,-0.20 | ±5% | | C2012C0G2A223J125AE | C2012C0G1H223J125AE |
| 22nF | 3225 | 1.60+0.30,-0.20 | ±5% | C3225C0G2E223J160AE | | |
| 33nF | 2012 | 1.25+0.25,-0.20 | ±5% | | C2012C0G2A333J125AE | C2012C0G1H333J125AE |
| 47nF | 3216 | 1.15±0.15 | ±5% | | C3216C0G2A473J115AE | C3216C0G1H473J115AE |
| 68nF | 3216 | 1.60+0.30,-0.20 | ±5% | | C3216C0G2A683J160AE | C3216C0G1H683J160AE |
| | 3225 | 2.30+0.30,-0.20 | ±5% | | C3225C0G2A683J230AE | |
| 100nF | 3216 | 1.60+0.30,-0.20 | ±5% | | C3216C0G2A104J160AE | C3216C0G1H104J160AE |
| 150nF | 5750 | 2.30+0.30,-0.20 | ±5% | C5750C0G2E154J230KE | C5750C0G2A154J230KE | |

Capacitance range table

Temperature characteristics: X5R(-55 to +85°C, ±15%)

| Capacitance | Dimensions | Thickness (mm) | Capacitance tolerance | Catalog number | | | | |
|-------------|------------|-----------------|-----------------------|------------------------|------------------------|------------------------|------------------------|-------------------------|
| | | | | Rated voltage Edc: 35V | Rated voltage Edc: 25V | Rated voltage Edc: 16V | Rated voltage Edc: 10V | Rated voltage Edc: 6.3V |
| 470nF | 1005 | 0.50+0.10,-0.05 | ±10% | C1005X5R1V474K050BE | C1005X5R1E474K050BE | | | |
| 1µF | 1005 | 0.50+0.15,-0.05 | ±10% | C1005X5R1V105K050BE | C1005X5R1E105K050BE | | | |
| | 1005 | 0.50+0.20,-0.10 | ±10% | C1005X5R1V225K050BE | C1005X5R1E225K050BE | | | |
| 2.2µF | 1608 | 0.80+0.15,-0.10 | ±10% | C1608X5R1V225K080AE | C1608X5R1E225K080AE | | | |
| | 1005 | 0.50+0.20,-0.10 | ±10% | | | C1005X5R1A475K050BE | C1005X5R0J475K050BE | |
| 4.7µF | 1608 | 0.80+0.15,-0.10 | ±10% | | | | C1608X5R1A475K080AE | |
| | 1608 | 0.80+0.20,-0.10 | ±10% | | | C1608X5R1C475K080AE | | |
| 10µF | 1608 | 0.80+0.20,-0.10 | ±10% | | | | | C1608X5R0J106K080AE |

⚠ Please be sure to request delivery specifications that provide further details on the features and specifications of the products for proper and safe use.
Please note that the contents may change without any prior notice due to reasons such as upgrading.

MULTILAYER CERAMIC CHIP CAPACITORS



Capacitance range table

Temperature characteristics: X7R (-55 to +125°C, ±15%)

| Capacitance | Dimensions | Thickness (mm) | Capacitance tolerance | Catalog number | | | | | | | | | |
|-------------|-----------------|-----------------|-----------------------|-------------------|------|--------------------|------|--------------------|---------------------|--------------------|------|---------------------|---------------------|
| | | | | Rated voltage 2kV | Edc: | Rated voltage 630V | Edc: | Rated voltage 250V | Edc: | Rated voltage 100V | Edc: | Rated voltage 50V | Edc: |
| 1nF | 1005 | 0.50+0.10,-0.05 | ±10% | | | | | | | | | C1005X7R1H102K050BE | |
| | | | ±20% | | | | | | | | | | C1005X7R1H102M050BE |
| | 1608 | 0.80+0.15,-0.10 | ±10% | | | | | | | | | C1608X7R2A102K080AE | C1608X7R1H102K080AE |
| | | | ±20% | | | | | | | | | | C1608X7R1H102M080AE |
| | 2012 | 0.85±0.15 | ±10% | | | | | | C2012X7R2E102K085AE | | | | C2012X7R2A102K085AE |
| | | | ±20% | | | | | | C2012X7R2E102M085AE | | | | C2012X7R2A102M085AE |
| 3216 | 1.15±0.15 | ±10% | | | | | | | | | | C3216X7R2J102K115AE | |
| | | ±20% | | | | | | | | | | C3216X7R2J102M115AE | |
| 4520 | 1.30±0.20 | ±10% | | | | | | | | | | C4520X7R3D102K130KE | |
| | | ±20% | | | | | | | | | | C4520X7R3D102M130KE | |
| 2.2nF | 1005 | 0.50+0.10,-0.05 | ±10% | | | | | | | | | C1005X7R1H222K050BE | |
| | | | ±20% | | | | | | | | | | C1005X7R1H222M050BE |
| | 1608 | 0.80+0.15,-0.10 | ±10% | | | | | | | | | C1608X7R2A222K080AE | C1608X7R1H222K080AE |
| | | | ±20% | | | | | | | | | | C1608X7R1H222M080AE |
| | 2012 | 0.85±0.15 | ±10% | | | | | | | | | | C2012X7R2E222K085AE |
| | | | ±20% | | | | | | | | | | C2012X7R2E222M085AE |
| 3216 | 1.15±0.15 | ±10% | | | | | | | | | | C3216X7R2J222K115AE | |
| | | ±20% | | | | | | | | | | C3216X7R2J222M115AE | |
| 4532 | 1.30±0.20 | ±10% | | | | | | | | | | C4532X7R3D222K130KE | |
| | | ±20% | | | | | | | | | | C4532X7R3D222M130KE | |
| 3.3nF | 3216 | 1.15±0.15 | ±10% | | | | | | | | | C3216X7R2J332K115AE | |
| | | | ±20% | | | | | | | | | C3216X7R2J332M115AE | |
| 4.7nF | 1005 | 0.50+0.10,-0.05 | ±10% | | | | | | | | | C1005X7R1H472K050BE | |
| | | | ±20% | | | | | | | | | | C1005X7R1H472M050BE |
| | 1608 | 0.80+0.15,-0.10 | ±10% | | | | | | | | | C1608X7R2A472K080AE | C1608X7R1H472K080AE |
| | | | ±20% | | | | | | | | | | C1608X7R1H472M080AE |
| | 2012 | 0.85±0.15 | ±10% | | | | | | | | | | C2012X7R2E472K085AE |
| | | | ±20% | | | | | | | | | | C2012X7R2E472M085AE |
| 3216 | 1.15±0.15 | ±10% | | | | | | | | | | C3216X7R2J472K115AE | |
| | | ±20% | | | | | | | | | | C3216X7R2J472M115AE | |
| 10nF | 1005 | 0.50+0.10,-0.05 | ±10% | | | | | | | | | C1005X7R1H103K050BE | |
| | | | ±20% | | | | | | | | | | C1005X7R1H103M050BE |
| | 1608 | 0.80+0.15,-0.10 | ±10% | | | | | | | | | C1608X7R2A103K080AE | C1608X7R1H103K080AE |
| | | | ±20% | | | | | | | | | | C1608X7R1H103M080AE |
| | 2012 | 0.85±0.15 | ±10% | | | | | | | | | | C2012X7R2A103K085AE |
| | | | ±20% | | | | | | | | | | C2012X7R2A103M085AE |
| 3216 | 1.15±0.15 | ±10% | | | | | | | | | | C3216X7R2J103K115AE | |
| | | ±20% | | | | | | | | | | C3216X7R2J103M115AE | |
| 22nF | 1005 | 0.50+0.10,-0.05 | ±10% | | | | | | | | | C1005X7R1H223K050BE | |
| | | | ±20% | | | | | | | | | | C1005X7R1H223M050BE |
| | 1608 | 0.80+0.15,-0.10 | ±10% | | | | | | | | | C1608X7R2A223K080AE | C1608X7R1H223K080AE |
| | | | ±20% | | | | | | | | | | C1608X7R1H223M080AE |
| | 2012 | 1.25+0.25,-0.20 | ±10% | | | | | | | | | | C2012X7R2E223K125AE |
| | | | ±20% | | | | | | | | | | C2012X7R2E223M125AE |
| 3216 | 1.15±0.15 | ±10% | | | | | | | | | | C3216X7R2E223K115AE | |
| | | ±20% | | | | | | | | | | C3216X7R2E223M115AE | |
| 3216 | 1.30±0.20 | ±10% | | | | | | | | | | C3216X7R2J223K130AE | |
| | | ±20% | | | | | | | | | | C3216X7R2J223M130AE | |
| 33nF | 3216 | 1.60+0.30,-0.20 | ±10% | | | | | | | | | C3216X7R2J333K160AE | |
| | | | ±20% | | | | | | | | | | C3216X7R2J333M160AE |
| 47nF | 1005 | 0.50+0.10,-0.05 | ±10% | | | | | | | | | C1005X7R1H473K050BE | |
| | | | ±20% | | | | | | | | | | C1005X7R1H473M050BE |
| | 1608 | 0.80+0.15,-0.10 | ±10% | | | | | | | | | C1608X7R1H473K080AE | |
| | | | ±20% | | | | | | | | | | C1608X7R1H473M080AE |
| | 2012 | 1.25+0.25,-0.20 | ±10% | | | | | | | | | | C2012X7R2A473K125AE |
| | | | ±20% | | | | | | | | | | C2012X7R2A473M125AE |
| 3216 | 1.60+0.30,-0.20 | ±10% | | | | | | | | | | C3216X7R2E473K160AE | |
| | | ±20% | | | | | | | | | | C3216X7R2E473M160AE | |
| 3225 | 2.00+0.30,-0.20 | ±10% | | | | | | | | | | C3225X7R2J473K200AE | |
| | | ±20% | | | | | | | | | | C3225X7R2J473M200AE | |

■ Gray item: The product which is not recommended to a new design.

MULTILAYER CERAMIC CHIP CAPACITORS



Capacitance range table

Temperature characteristics: X7R (-55 to +125°C, ±15%)

| Capacitance | Dimensions | Thickness (mm) | Capacitance tolerance | Catalog number | | | | | |
|-------------|-----------------|-----------------|-----------------------|-------------------------|-------------------------|-------------------------|------------------------|------------------------|------------------------|
| | | | | Rated voltage Edc: 630V | Rated voltage Edc: 250V | Rated voltage Edc: 100V | Rated voltage Edc: 50V | Rated voltage Edc: 50V | Rated voltage Edc: 50V |
| 68nF | 3225 | 2.00+0.30,-0.20 | ±10% | C3225X7R2J683K200AE | | | | | |
| | | | ±20% | C3225X7R2J683M200AE | | | | | |
| 100nF | 1005 | 0.50+0.10,-0.05 | ±10% | C1005X7R1H104K050BE | | | | | |
| | | | ±20% | C1005X7R1H104M050BE | | | | | |
| | 1608 | 0.80+0.15,-0.10 | ±10% | C1608X7R1H104K080AE | | | | | |
| | | | ±20% | C1608X7R1H104M080AE | | | | | |
| | 2012 | 1.25+0.25,-0.20 | ±10% | C2012X7R2A104K125AE | | C2012X7R1H104K125AE | | C2012X7R1H104M125AE | |
| | | | ±20% | C2012X7R2A104M125AE | | C2012X7R1H104M125AE | | | |
| | 3216 | 1.60+0.30,-0.20 | ±10% | C3216X7R2E104K160AE | | C3216X7R2A104K160AE | | C3216X7R1H104M160AE | |
| | | | ±20% | C3216X7R2E104M160AE | | C3216X7R2A104M160AE | | | |
| 3225 | 2.00+0.30,-0.20 | ±10% | C3225X7R2E104K200AE | | C3225X7R2A104K200AE | | C3225X7R1H104M200AE | | |
| | | ±20% | C3225X7R2E104M200AE | | C3225X7R2A104M200AE | | | | |
| 4532 | 2.30+0.30,-0.20 | ±10% | C4532X7R2J104K230KE | | | | | | |
| | | ±20% | C4532X7R2J104M230KE | | | | | | |
| 220nF | 1608 | 0.80+0.15,-0.10 | ±10% | C1608X7R1H224K080AE | | | | | |
| | | | ±20% | C1608X7R1H224M080AE | | | | | |
| | 2012 | 1.25+0.25,-0.20 | ±10% | C2012X7R1H224K125AE | | C2012X7R1H224M125AE | | C2012X7R1H224K125AE | |
| | | | ±20% | C2012X7R1H224M125AE | | C2012X7R1H224M125AE | | | |
| 3216 | 1.15±0.15 | ±10% | C3216X7R2A224K115AE | | C3216X7R2A224M115AE | | C3216X7R1H224M115AE | | |
| | | ±20% | C3216X7R2A224M115AE | | C3216X7R2A224M115AE | | | | |
| 470nF | 3225 | 2.00+0.30,-0.20 | ±10% | C3225X7R2E224K200AE | | C3225X7R2E224M200AE | | C3225X7R1H224M200AE | |
| | | | ±20% | C3225X7R2E224M200AE | | C3225X7R2E224M200AE | | | |
| | 5750 | 2.30+0.30,-0.20 | ±10% | C5750X7R2J224K230KE | | | | | |
| | | | ±20% | C5750X7R2J224M230KE | | | | | |
| 470nF | 1608 | 0.80+0.15,-0.10 | ±10% | C1608X7R1H474K080AE | | | | | |
| | | | ±20% | C1608X7R1H474M080AE | | | | | |
| | 2012 | 1.25+0.25,-0.20 | ±10% | C2012X7R1H474K125AE | | C2012X7R1H474M125AE | | C2012X7R1H474K125AE | |
| | | | ±20% | C2012X7R1H474M125AE | | C2012X7R1H474M125AE | | | |
| 3216 | 1.60+0.30,-0.20 | ±10% | C3216X7R2A474K160AE | | C3216X7R2A474M160AE | | C3216X7R1H474M160AE | | |
| | | ±20% | C3216X7R2A474M160AE | | C3216X7R2A474K200AE | | C3216X7R1H474M160AE | | |
| 3225 | 2.00+0.30,-0.20 | ±10% | C3225X7R2A474K200AE | | C3225X7R2A474M200AE | | C3225X7R1H474M200AE | | |
| | | ±20% | C3225X7R2A474M200AE | | C3225X7R2A474M200AE | | | | |
| 4532 | 2.30+0.30,-0.20 | ±10% | C4532X7R2E474K230KE | | | | | | |
| | | ±20% | C4532X7R2E474M230KE | | | | | | |
| 1µF | 2012 | 1.25+0.25,-0.20 | ±10% | C2012X7R1H105K125AE | | C2012X7R1H105M125AE | | C2012X7R1H105K125AE | |
| | | | ±20% | C2012X7R1H105M125AE | | C2012X7R1H105M125AE | | | |
| | 3216 | 1.60+0.30,-0.20 | ±10% | C3216X7R2A105K160AE | | C3216X7R2A105M160AE | | C3216X7R1H105K160AE | |
| | | | ±20% | C3216X7R2A105M160AE | | C3216X7R2A105M160AE | | C3216X7R1H105M160AE | |
| 3225 | 2.00+0.30,-0.20 | ±10% | C3225X7R2A105K200AE | | C3225X7R2A105M200AE | | C3225X7R1H105M200AE | | |
| | | ±20% | C3225X7R2A105M200AE | | C3225X7R2A105M200AE | | | | |
| 5750 | 2.30+0.30,-0.20 | ±10% | C5750X7R2E105K230KE | | | | | | |
| | | ±20% | C5750X7R2E105M230KE | | | | | | |
| 2.2µF | 2012 | 1.25+0.25,-0.20 | ±10% | C2012X7R1H225K125AE | | C2012X7R1H225M125AE | | C2012X7R1H225K125AE | |
| | | | ±20% | C2012X7R1H225M125AE | | C2012X7R1H225M125AE | | | |
| | 3216 | 1.60+0.30,-0.20 | ±10% | C3216X7R1H225K160AE | | C3216X7R1H225M160AE | | C3216X7R1H225K160AE | |
| | | | ±20% | C3216X7R1H225M160AE | | C3216X7R1H225M160AE | | | |
| 3225 | 2.00+0.30,-0.20 | ±10% | C3225X7R1H225K200AE | | C3225X7R1H225M200AE | | C3225X7R1H225K200AE | | |
| | | ±20% | C3225X7R1H225M200AE | | C3225X7R1H225M200AE | | | | |
| 2.2µF | 3225 | 2.30+0.30,-0.20 | ±10% | C3225X7R2A225K230AE | | C3225X7R2A225M230AE | | C3225X7R1H225M230AE | |
| | | | ±20% | C3225X7R2A225M230AE | | C3225X7R2A225M230AE | | | |
| 4.7µF | 3216 | 1.60+0.30,-0.20 | ±10% | C3216X7R1H475K160AE | | C3216X7R1H475M160AE | | C3216X7R1H475K160AE | |
| | | | ±20% | C3216X7R1H475M160AE | | C3216X7R1H475M160AE | | | |

⚠ Please be sure to request delivery specifications that provide further details on the features and specifications of the products for proper and safe use.
Please note that the contents may change without any prior notice due to reasons such as upgrading.

MULTILAYER CERAMIC CHIP CAPACITORS



Capacitance range table

Temperature characteristics: X7R (-55 to +125°C, ±15%)

| Capacitance | Dimensions | Thickness (mm) | Capacitance tolerance | Catalog number | | |
|-------------|-----------------|-----------------|-----------------------|------------------------|------------------------|------------------------|
| | | | | Rated voltage Edc: 35V | Rated voltage Edc: 25V | Rated voltage Edc: 16V |
| 220nF | 1005 | 0.50+0.10,-0.05 | ±10% | C1005X7R1V224K050BE | C1005X7R1E224K050BE | C1005X7R1C224K050BE |
| | | | ±20% | C1005X7R1V224M050BE | C1005X7R1E224M050BE | C1005X7R1C224M050BE |
| 470nF | 1608 | 0.80+0.15,-0.10 | ±10% | C1608X7R1V474K080AE | C1608X7R1E474K080AE | |
| | | | ±20% | C1608X7R1V474M080AE | C1608X7R1E474M080AE | |
| 1µF | 1608 | 0.80+0.15,-0.10 | ±10% | C1608X7R1V105K080AE | C1608X7R1E105K080AE | |
| | | | ±20% | C1608X7R1V105M080AE | C1608X7R1E105M080AE | |
| | 2012 | 1.25+0.25,-0.20 | ±10% | C2012X7R1V105K125AE | | |
| | | | ±20% | C2012X7R1V105M125AE | | |
| 1608 | 0.80+0.15,-0.10 | ±10% | | | C1608X7R1A225K080AE | |
| | | ±20% | | | C1608X7R1A225M080AE | |
| 2.2µF | 2012 | 1.25+0.25,-0.20 | ±10% | C2012X7R1V225K125AE | C2012X7R1E225K125AE | |
| | | | ±20% | C2012X7R1V225M125AE | C2012X7R1E225M125AE | |
| | 3216 | 1.60+0.30,-0.20 | ±10% | C3216X7R1V225K160AE | C3216X7R1E225K160AE | |
| | | | ±20% | C3216X7R1V225M160AE | C3216X7R1E225M160AE | |
| 2012 | 1.25+0.25,-0.20 | ±10% | C2012X7R1V475K125AE | C2012X7R1E475K125AE | C2012X7R1C475K125AE | |
| | | ±20% | C2012X7R1V475M125AE | C2012X7R1E475M125AE | C2012X7R1C475M125AE | |
| 4.7µF | 3216 | 1.60+0.30,-0.20 | ±10% | C3216X7R1V475K160AE | C3216X7R1E475K160AE | |
| | | | ±20% | C3216X7R1V475M160AE | C3216X7R1E475M160AE | |
| 10µF | 2012 | 1.25+0.25,-0.20 | ±10% | | | C2012X7R1A106K125AE |
| | | | ±20% | | | C2012X7R1A106M125AE |
| 3216 | 1.60+0.30,-0.20 | ±10% | C3216X7R1V106K160AE | C3216X7R1E106K160AE | C3216X7R1C106K160AE | |
| | | ±20% | C3216X7R1V106M160AE | C3216X7R1E106M160AE | C3216X7R1C106M160AE | |
| 47nF | 7563 | 2.30 (2.50max.) | ±20% | | C7563X7R1E476M230LE | |

Capacitance range table

Temperature characteristics: X7S (-55 to +125°C, ±22%)

| Capacitance | Dimensions | Thickness (mm) | Capacitance tolerance | Catalog number | | |
|-------------|-----------------|-----------------|-----------------------|-------------------------|------------------------|------------------------|
| | | | | Rated voltage Edc: 100V | Rated voltage Edc: 50V | Rated voltage Edc: 16V |
| 47nF | 1608 | 0.80+0.15,-0.10 | ±10% | C1608X7S2A473K080AE | | |
| | | | ±20% | C1608X7S2A473M080AE | | |
| 100nF | 1608 | 0.80+0.15,-0.10 | ±10% | C1608X7S2A104K080AE | | |
| | | | ±20% | C1608X7S2A104M080AE | | |
| 220nF | 2012 | 0.85±0.15 | ±10% | C2012X7S2A224K085AE | | |
| | | | ±20% | C2012X7S2A224M085AE | | |
| 470nF | 2012 | 1.25+0.25,-0.20 | ±10% | C2012X7S2A474K125AE | | |
| | | | ±20% | C2012X7S2A474M125AE | | |
| 1µF | 2012 | 1.25+0.25,-0.20 | ±10% | C2012X7S2A105K125AE | | |
| | | | ±20% | C2012X7S2A105M125AE | | |
| 2.2µF | 3216 | 1.60+0.30,-0.20 | ±10% | C3216X7S2A225K160AE | | |
| | | | ±20% | C3216X7S2A225M160AE | | |
| 3.3µF | 3225 | 2.00+0.30,-0.20 | ±10% | C3225X7S2A335K200AE | | |
| | | | ±20% | C3225X7S2A335M200AE | | |
| 4.7µF | 3225 | 2.00+0.30,-0.20 | ±10% | C3225X7S2A475K200AE | | |
| | | | ±20% | C3225X7S2A475M200AE | | |
| | 2.30+0.30,-0.20 | ±10% | | C3225X7S1H475K230AE | | |
| | | ±20% | | C3225X7S1H475M230AE | | |
| 3225 | 2.50 ±0.30 | ±10% | | C3225X7S1H106K250AE | | |
| | | ±20% | | C3225X7S1H106M250AE | | |
| 10µF | 5750 | 2.30+0.30,-0.20 | ±10% | C5750X7S2A106K230KE | | |
| | | | ±20% | C5750X7S2A106M230KE | | |
| 22µF | 7563 | 2.30 (2.50max.) | ±20% | | C7563X7S1H226M230LE | |
| 100µF | 7563 | 2.80 (3.00max.) | ±20% | | | C7563X7S1C107M280LE |

⚠ Please be sure to request delivery specifications that provide further details on the features and specifications of the products for proper and safe use.
Please note that the contents may change without any prior notice due to reasons such as upgrading.

Capacitance range table

Temperature characteristics: X7T (-55 to +125°C, +22, -33%)

| Capacitance | Dimensions | Thickness (mm) | Capacitance tolerance | Catalog number | | |
|-------------|-----------------|-----------------|-----------------------|-------------------------|-------------------------|-------------------------|
| | | | | Rated voltage Edc: 630V | Rated voltage Edc: 450V | Rated voltage Edc: 250V |
| 10 nF | 2012 | 0.85±0.15 | ± 10% | C2012X7T2W103K085AE | | |
| | | | ± 20% | C2012X7T2W103M085AE | | |
| 22 nF | 2012 | 1.25+0.25,-0.20 | ± 10% | C2012X7T2W223K125AE | | |
| | | | ± 20% | C2012X7T2W223M125AE | | |
| 47 nF | 2012 | 1.25+0.25,-0.20 | ± 10% | C2012X7T2W473K125AE | C2012X7T2E473K125AE | |
| | | | ± 20% | C2012X7T2W473M125AE | C2012X7T2E473M125AE | |
| | 3216 | 1.60+0.30,-0.20 | ± 10% | C3216X7T2J473K160AE | | |
| | | | ± 20% | C3216X7T2J473M160AE | | |
| 2012 | 1.25+0.25,-0.20 | ± 10% | | | C2012X7T2E104K125AE | |
| | | ± 20% | | | C2012X7T2E104M125AE | |
| 100 nF | 3216 | 1.60+0.30,-0.20 | ± 10% | C3216X7T2W104K160AE | | |
| | | | ± 20% | C3216X7T2W104M160AE | | |
| | 3225 | 1.60+0.30,-0.20 | ± 10% | C3225X7T2J104K160AE | | |
| | | | ± 20% | C3225X7T2J104M160AE | | |
| 150 nF | 3225 | 2.00+0.30,-0.20 | ± 10% | C3225X7T2J154K200AE | | |
| | | | ± 20% | C3225X7T2J154M200AE | | |
| | 3216 | 1.60+0.30,-0.20 | ± 10% | | | C3216X7T2E224K160AE |
| | | | ± 20% | | | C3216X7T2E224M160AE |
| 220 nF | 3225 | 2.00+0.30,-0.20 | ± 10% | C3225X7T2W224K200AE | | |
| | | | ± 20% | C3225X7T2W224M200AE | | |
| | 4532 | 2.00+0.30,-0.20 | ± 10% | C4532X7T2J224K200KE | | |
| | | | ± 20% | C4532X7T2J224M200KE | | |
| 330 nF | 3225 | 2.00+0.30,-0.20 | ± 10% | | | C3225X7T2E334K200AE |
| | | | ± 20% | | | C3225X7T2E334M200AE |
| | 4532 | 2.30+0.30,-0.20 | ± 10% | C4532X7T2W474K230KE | | |
| | | | ± 20% | C4532X7T2W474M230KE | | |
| 470 nF | 5750 | 2.50±0.30 | ± 10% | C5750X7T2J474K250KE | | |
| | | | ± 20% | C5750X7T2J474M250KE | | |
| | 4532 | 2.50±0.30 | ± 10% | | | C4532X7T2E105K250KE |
| | | | ± 20% | | | C4532X7T2E105M250KE |
| 1 µF | 5750 | 2.50±0.30 | ± 10% | C5750X7T2W105K250KE | | |
| | | | ± 20% | C5750X7T2W105M250KE | | |
| | 4532 | 2.50±0.30 | ± 10% | | | C5750X7T2E225K250KE |
| | | | ± 20% | | | C5750X7T2E225M250KE |
| 2.2 µF | 5750 | 2.50±0.30 | ± 10% | | | C5750X7T2E225K250KE |
| | | | ± 20% | | | C5750X7T2E225M250KE |


MULTILAYER CERAMIC CHIP CAPACITORS

Capacitance range table

Temperature characteristics: X8R (-55 to +150°C, ±15%)

| Capacitance | Dimensions | Thickness (mm) | Capacitance tolerance | Catalog number | | | |
|-------------|-----------------|-----------------|-----------------------|-------------------------|------------------------|------------------------|------------------------|
| | | | | Rated voltage Edc: 100V | Rated voltage Edc: 50V | Rated voltage Edc: 25V | Rated voltage Edc: 16V |
| 150pF | 1005 | 0.50+0.10,-0.05 | ±10% | C1005X8R2A151K050BE | C1005X8R1H151K050BE | | |
| | | | ±20% | C1005X8R2A151M050BE | C1005X8R1H151M050BE | | |
| 220pF | 1005 | 0.50+0.10,-0.05 | ±10% | C1005X8R2A221K050BE | C1005X8R1H221K050BE | | |
| | | | ±20% | C1005X8R2A221M050BE | C1005X8R1H221M050BE | | |
| 330pF | 1005 | 0.50+0.10,-0.05 | ±10% | C1005X8R2A331K050BE | C1005X8R1H331K050BE | | |
| | | | ±20% | C1005X8R2A331M050BE | C1005X8R1H331M050BE | | |
| 470pF | 1005 | 0.50+0.10,-0.05 | ±10% | C1005X8R2A471K050BE | C1005X8R1H471K050BE | | |
| | | | ±20% | C1005X8R2A471M050BE | C1005X8R1H471M050BE | | |
| 680pF | 1005 | 0.50+0.10,-0.05 | ±10% | C1005X8R2A681K050BE | C1005X8R1H681K050BE | | |
| | | | ±20% | C1005X8R2A681M050BE | C1005X8R1H681M050BE | | |
| 1nF | 1005 | 0.50+0.10,-0.05 | ±10% | C1005X8R2A102K050BE | C1005X8R1H102K050BE | | |
| | | | ±20% | C1005X8R2A102M050BE | C1005X8R1H102M050BE | | |
| | 1608 | 0.80+0.15,-0.10 | ±10% | C1608X8R2A102K080AE | C1608X8R1H102K080AE | | |
| | | | ±20% | C1608X8R2A102M080AE | C1608X8R1H102M080AE | | |
| 1.5nF | 1005 | 0.50+0.10,-0.05 | ±10% | C1005X8R2A152K050BE | C1005X8R1H152K050BE | | |
| | | | ±20% | C1005X8R2A152M050BE | C1005X8R1H152M050BE | | |
| | 1608 | 0.80+0.15,-0.10 | ±10% | C1608X8R2A152K080AE | C1608X8R1H152K080AE | | |
| | | | ±20% | C1608X8R2A152M080AE | C1608X8R1H152M080AE | | |
| 2.2nF | 1005 | 0.50+0.10,-0.05 | ±10% | C1005X8R2A222K050BE | C1005X8R1H222K050BE | | |
| | | | ±20% | C1005X8R2A222M050BE | C1005X8R1H222M050BE | | |
| | 1608 | 0.80+0.15,-0.10 | ±10% | C1608X8R2A222K080AE | C1608X8R1H222K080AE | | |
| | | | ±20% | C1608X8R2A222M080AE | C1608X8R1H222M080AE | | |
| 3.3nF | 1005 | 0.50+0.10,-0.05 | ±10% | C1005X8R2A332K050BE | C1005X8R1H332K050BE | | |
| | | | ±20% | C1005X8R2A332M050BE | C1005X8R1H332M050BE | | |
| | 1608 | 0.80+0.15,-0.10 | ±10% | C1608X8R2A332K080AE | C1608X8R1H332K080AE | | |
| | | | ±20% | C1608X8R2A332M080AE | C1608X8R1H332M080AE | | |
| 4.7nF | 1005 | 0.50+0.10,-0.05 | ±10% | C1005X8R1H472K050BE | C1005X8R1H472M050BE | | |
| | | | ±20% | C1005X8R1H472M050BE | C1005X8R1H472M050BE | | |
| | 1608 | 0.80+0.15,-0.10 | ±10% | C1608X8R2A472K080AE | C1608X8R1H472K080AE | | |
| | | | ±20% | C1608X8R2A472M080AE | C1608X8R1H472M080AE | | |
| 6.8nF | 1005 | 0.50+0.10,-0.05 | ±10% | C1005X8R1H682K050BE | C1005X8R1E682K050BE | C1005X8R1E682M050BE | |
| | | | ±20% | C1005X8R1H682M050BE | C1005X8R1E682M050BE | C1005X8R1E682M050BE | |
| | 1608 | 0.80+0.15,-0.10 | ±10% | C1608X8R2A682K080AE | C1608X8R1H682K080AE | | |
| | | | ±20% | C1608X8R2A682M080AE | C1608X8R1H682M080AE | | |
| 10nF | 1005 | 0.50+0.10,-0.05 | ±10% | C1005X8R1H103K050BE | C1005X8R1E103K050BE | C1005X8R1E103M050BE | |
| | | | ±20% | C1005X8R1H103M050BE | C1005X8R1E103M050BE | C1005X8R1E103M050BE | |
| | 1608 | 0.80+0.15,-0.10 | ±10% | C1608X8R2A103K080AE | C1608X8R1H103K080AE | | |
| | | | ±20% | C1608X8R2A103M080AE | C1608X8R1H103M080AE | | |
| 15nF | 1005 | 0.50+0.10,-0.05 | ±10% | | | C1005X8R1E153K050BE | |
| | | | ±20% | | | C1005X8R1E153M050BE | |
| | 1608 | 0.80+0.15,-0.10 | ±10% | C1608X8R2A153K080AE | C1608X8R1H153K080AE | | |
| | | | ±20% | C1608X8R2A153M080AE | C1608X8R1H153M080AE | | |
| 22nF | 1005 | 0.50+0.10,-0.05 | ±10% | | | C1005X8R1E223K050BE | |
| | | | ±20% | | | C1005X8R1E223M050BE | |
| | 1608 | 0.80+0.15,-0.10 | ±10% | C1608X8R2A223K080AE | C1608X8R1H223K080AE | | |
| | | | ±20% | C1608X8R2A223M080AE | C1608X8R1H223M080AE | | |
| 2012 | 1.25+0.25,-0.20 | ±10% | C2012X8R2A223K125AE | | | | |
| | | ±20% | C2012X8R2A223M125AE | | | | |
| 33nF | 1005 | 0.50+0.10,-0.05 | ±10% | | | C1005X8R1E333K050BE | C1005X8R1C333K050BE |
| | | | ±20% | | | C1005X8R1E333M050BE | C1005X8R1C333M050BE |
| | 1608 | 0.80+0.15,-0.10 | ±10% | | C1608X8R1H333K080AE | | |
| | | | ±20% | | C1608X8R1H333M080AE | | |
| 2012 | 1.25+0.25,-0.20 | ±10% | C2012X8R2A333K125AE | | | | |
| | | ±20% | C2012X8R2A333M125AE | | | | |
| 47nF | 1005 | 0.50+0.10,-0.05 | ±10% | | | C1005X8R1E473K050BE | C1005X8R1C473K050BE |
| | | | ±20% | | | C1005X8R1E473M050BE | C1005X8R1C473M050BE |
| | 1608 | 0.80+0.15,-0.10 | ±10% | | C1608X8R1H473K080AE | | |
| | | | ±20% | | C1608X8R1H473M080AE | | |
| 2012 | 1.25+0.25,-0.20 | ±10% | C2012X8R2A473K125AE | | | | |
| | | ±20% | C2012X8R2A473M125AE | | | | |
| 68nF | 1608 | 0.80+0.15,-0.10 | ±10% | | C1608X8R1H683K080AE | C1608X8R1E683K080AE | |
| | | | ±20% | | C1608X8R1H683M080AE | C1608X8R1E683M080AE | |
| | 2012 | 1.25+0.25,-0.20 | ±10% | C2012X8R2A683K125AE | C2012X8R1H683K125AE | | |
| | | | ±20% | C2012X8R2A683M125AE | C2012X8R1H683M125AE | | |

■ Gray item: The product which is not recommended to a new design.

 Please be sure to request delivery specifications that provide further details on the features and specifications of the products for proper and safe use. Please note that the contents may change without any prior notice due to reasons such as upgrading.

MULTILAYER CERAMIC CHIP CAPACITORS TDK

Capacitance range table

Temperature characteristics: X8R (-55 to +150°C, ±15%)

| Capacitance | Dimensions | Thickness (mm) | Capacitance tolerance | Catalog number | | | |
|-------------|-----------------|-----------------|-----------------------|-------------------------|------------------------|------------------------|------------------------|
| | | | | Rated voltage Edc: 100V | Rated voltage Edc: 50V | Rated voltage Edc: 25V | Rated voltage Edc: 16V |
| 100nF | 1608 | 0.80+0.15,-0.10 | ±10% | | C1608X8R1H104K080AE | C1608X8R1E104K080AE | |
| | | | ±20% | | C1608X8R1H104M080AE | C1608X8R1E104M080AE | |
| | 2012 | 1.25+0.25,-0.20 | ±10% | | C2012X8R1H104K125AE | | |
| | | | ±20% | | C2012X8R1H104M125AE | | |
| 3216 | 1.15±0.15 | ±10% | | C3216X8R2A104K115AE | | | |
| | | ±20% | | C3216X8R2A104M115AE | | | |
| 150nF | 1608 | 0.80+0.15,-0.10 | ±10% | | | C1608X8R1E154K080AE | |
| | | | ±20% | | | C1608X8R1E154M080AE | |
| | 2012 | 0.85±0.15 | ±10% | | | C2012X8R1E154K085AE | |
| | | | ±20% | | | C2012X8R1E154M085AE | |
| | | 1.25+0.25,-0.20 | ±10% | | C2012X8R1H154K125AE | | |
| | | | ±20% | | C2012X8R1H154M125AE | | |
| 3216 | 1.60+0.30,-0.20 | ±10% | | C3216X8R2A154K160AE | | | |
| | | ±20% | | C3216X8R2A154M160AE | | | |
| 220nF | 1608 | 0.80+0.15,-0.10 | ±10% | | | C1608X8R1E224K080AE | |
| | | | ±20% | | | C1608X8R1E224M080AE | |
| | 2012 | 1.25+0.25,-0.20 | ±10% | | C2012X8R1H224K125AE | | C2012X8R1E224K125AE |
| | | | ±20% | | C2012X8R1H224M125AE | | C2012X8R1E224M125AE |
| 3216 | 1.60+0.30,-0.20 | ±10% | | C3216X8R2A224K160AE | | | |
| | | ±20% | | C3216X8R2A224M160AE | | | |
| 330nF | 1608 | 0.80+0.15,-0.10 | ±10% | | | C1608X8R1E334K080AE | C1608X8R1C334K080AE |
| | | | ±20% | | | C1608X8R1E334M080AE | C1608X8R1C334M080AE |
| | 2012 | 1.25+0.25,-0.20 | ±10% | | | C2012X8R1E334K125AE | |
| | | | ±20% | | | C2012X8R1E334M125AE | |
| 3216 | 1.60+0.30,-0.20 | ±10% | | C3216X8R2A334K160AE | C3216X8R1H334K160AE | | |
| | | ±20% | | C3216X8R2A334M160AE | C3216X8R1H334M160AE | | |
| 470nF | 1608 | 0.80+0.15,-0.10 | ±10% | | | | C1608X8R1C474K080AE |
| | | | ±20% | | | | C1608X8R1C474M080AE |
| | 2012 | 1.25+0.25,-0.20 | ±10% | | | C2012X8R1E474K125AE | |
| | | | ±20% | | | C2012X8R1E474M125AE | |
| 3216 | 1.60+0.30,-0.20 | ±10% | | C3216X8R1H474K160AE | | | |
| | | ±20% | | C3216X8R1H474M160AE | | | |
| 3225 | 2.00+0.30,-0.20 | ±10% | | C3225X8R2A474K200AE | | | |
| | | ±20% | | C3225X8R2A474M200AE | | | |
| 680nF | 2012 | 1.25+0.25,-0.20 | ±10% | | | C2012X8R1E684K125AE | C2012X8R1C684K125AE |
| | | | ±20% | | | C2012X8R1E684M125AE | C2012X8R1C684M125AE |
| | 3216 | 1.60+0.30,-0.20 | ±10% | | C3216X8R1H684K160AE | | |
| | | | ±20% | | C3216X8R1H684M160AE | | |
| 3225 | 2.50±0.30 | ±10% | | C3225X8R2A684K250AE | | | |
| | | ±20% | | C3225X8R2A684M250AE | | | |
| 1µF | 2012 | 1.25+0.25,-0.20 | ±10% | | | C2012X8R1E105K125AE | C2012X8R1C105K125AE |
| | | | ±20% | | | C2012X8R1E105M125AE | C2012X8R1C105M125AE |
| 3216 | 1.60+0.30,-0.20 | ±10% | | C3216X8R1H105K160AE | | | |
| | | ±20% | | C3216X8R1H105M160AE | | | |
| 1.5µF | 3216 | 1.60+0.30,-0.20 | ±10% | | | C3216X8R1E155K160AE | |
| | | | ±20% | | | C3216X8R1E155M160AE | |
| 2.2µF | 3216 | 1.60+0.30,-0.20 | ±10% | | | C3216X8R1E225K160AE | |
| | | | ±20% | | | C3216X8R1E225M160AE | |
| 3.3µF | 3216 | 1.60+0.30,-0.20 | ±10% | | | C3216X8R1E335K160AE | C3216X8R1C335K160AE |
| | | | ±20% | | | C3216X8R1E335M160AE | C3216X8R1C335M160AE |
| | 3225 | 2.50±0.30 | ±10% | | | C3225X8R1E335K250AE | |
| | | | ±20% | | | C3225X8R1E335M250AE | |
| 4.7µF | 3216 | 1.60+0.30,-0.20 | ±10% | | | C3216X8R1E475K160AE | C3216X8R1C475K160AE |
| | | | ±20% | | | C3216X8R1E475M160AE | C3216X8R1C475M160AE |
| | 3225 | 2.50±0.30 | ±10% | | | C3225X8R1E475K250AE | |
| | | | ±20% | | | C3225X8R1E475M250AE | |
| 10µF | 3225 | 2.50±0.30 | ±10% | | | C3225X8R1E106K250AE | C3225X8R1C106K250AE |
| | | | ±20% | | | C3225X8R1E106M250AE | C3225X8R1C106M250AE |

⚠ Please be sure to request delivery specifications that provide further details on the features and specifications of the products for proper and safe use. Please note that the contents may change without any prior notice due to reasons such as upgrading.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Multilayer Ceramic Capacitors MLCC - SMD/SMT](#) category:

Click to view products by [TDK](#) manufacturer:

Other Similar products are found below :

[M39014/01-1467](#) [M39014/02-1218V](#) [M39014/02-1225V](#) [M39014/02-1262V](#) [M39014/02-1301](#) [M39014/22-0631](#) [1210J5000102JCT](#)
[1210J2K00102KXT](#) [1210J5000103KXT](#) [1210J5000223KXT](#) [D55342E07B379BR-TR](#) [D55342E07B523DR-T/R](#) [1812J1K00103KXT](#)
[1812J1K00473KXT](#) [1812J2K00680JCT](#) [1812J4K00102MXT](#) [1812J5000102JCT](#) [1812J5000103JCT](#) [1812J5000682JCT](#) [NIN-FB391JTRF](#)
[NIN-FC2R7JTRF](#) [NPIS27H102MTRF](#) [C1206C101J1GAC](#) [C1608C0G1E472JT000N](#) [C2012C0G2A472J](#) [2220J2K00101JCT](#)
[KHC201E225M76N0T00](#) [LRC-LRF1206LF-01R025FTR1K](#) [1812J1K00222JCT](#) [1812J2K00102KXT](#) [1812J2K00222KXT](#)
[1812J2K00472KXT](#) [2-1622820-7-CUT-TAPE](#) [2220J3K00102KXT](#) [2225J2500824KXT](#) [CCR07CG103KM](#) [CGA2B2C0G1H010C](#)
[CGA2B2C0G1H040C](#) [CGA2B2C0G1H050C](#) [CGA2B2C0G1H060D](#) [CGA2B2C0G1H070D](#) [CGA2B2C0G1H151J](#) [CGA2B2C0G1H1R5C](#)
[CGA2B2C0G1H2R2C](#) [CGA2B2C0G1H3R3C](#) [CGA2B2C0G1H680J](#) [CGA2B2C0G1H6R8D](#) [CGA2B2X8R1H221K](#) [CGA2B2X8R1H472K](#)
[CGA3E1X7R1C474K](#)