



Introducing Ultra Short LC : Fiber Optic Cable Assemblies

Ultra Short LC connector based, high quality single mode and multi mode fiber optic cable assemblies have been designed to meet the highest and most demanding Industry standards. The newly developed ultra short LC connector provides a strong solution for all connectivity needs in any professional network and system, especially in places with limited space.

KEY FEATURES

- Ultra short 35.4 mm from tip to end of boot
- Simplex and duplex
- Single mode and multi mode
- 1.25mm ceramic ferrules
- OFNP, OFNR and LSHZ
- Cable diameters 1.8 mm, 2.0 mm
- Attached protection cap
- Factory terminated and tested
- Tunable single mode connectors
- Bend limiting boot
- Anti snag thumb latch

BENEFITS

- Due to the short bending radius in all directions, no preformed boots are needed and only one assembly part number will be required.
- No need to adjust your racks or equipment; the product can be used in small area's (Usable for front patching with limited space "X" (26-32 mm) between door and panel, see table on the right)
- High quality connectors with outstanding link performance.
- Load can be applied without affecting signal integrity.
- Compatible with industry standard LC connectors, so no replacements of installed assemblies needed.

APPLICATIONS

- Transmission systems
- Computer clusters
- Storage systems
- Switching systems
- DWDM systems
- Telecommunications and Metropolitan Network
- Premises wiring
- Access network

OPTICAL

Typical insertions loss	Typical return loss
Single Mode : 0.1dB	Single Mode > 50dB
Multi Mode : 0.1dB	Multi Mode > 30dB

MECHANICAL

Mating durability : 500
Operating temperature single mode : -20°C to +70°C
Operating temperature multi mode : -10°C to + 60°C

STANDARDS AND SPECIFICATIONS

The Ultra short LC is designed to meet the relevant Telcordia GR326-CORE, IEC, CENELEC, ISO and ETSI specifications.



NOTE : See chart below for dimension "X".

Average Attenuation of 4 Pairs of LC Connectors

G657	X = 32 mm		X = 30 mm		X = 26 mm	
	λ (nm)	Average (dB)	λ (nm)	Average (dB)	λ (nm)	Average (dB)
	1310	0.00	1550	0.01	1310	0.03
				0.00	1550	0.00
					1310	0.01
					1550	0.02

G652	X = 32 mm		X = 30 mm		X = 26 mm	
	λ (nm)	Average (dB)	λ (nm)	Average (dB)	λ (nm)	Average (dB)
	1310	0.00	1550	0.02	1310	0.02
				0.02	1550	0.08
					1310	0.01
					1550	0.25

PRODUCT OFFERING

Fiber Optic Cable Assembly Part Numbers

MULTI MODE

62,5/125 1,8 mini zip cable LC/PC ultra short : LC/PC ultra short

2061528-1	FOMM62 Lead 1.8MZ LC Ultra Short 1m
2061528-2	FOMM62 Lead 1.8MZ LC Ultra Short 2m
2061528-3	FOMM62 Lead 1.8MZ LC Ultra Short 3m
2061528-5	FOMM62 Lead 1.8MZ LC Ultra Short 5m

MULTI MODE

50/125 1,8 mini zip cable LC/PC ultra short : LC/PC ultra short

2061529-1	FOMM50 Lead 1.8MZ LC Ultra Short 1m
2061529-2	FOMM50 Lead 1.8MZ LC Ultra Short 2m
2061529-3	FOMM50 Lead 1.8MZ LC Ultra Short 3m
2061529-5	FOMM50 Lead 1.8MZ LC Ultra Short 5m

SINGLE MODE

G652 1,8 mini zip cable LC/PC ultra short : LC/PC ultra short

2061530-1	FOSM G652 Lead 1.8MZ LC Ultra Short 1m
2061530-2	FOSM G652 Lead 1.8MZ LC Ultra Short 2m
2061530-3	FOSM G652 Lead 1.8MZ LC Ultra Short 3m
2061530-5	FOSM G652 Lead 1.8MZ LC Ultra Short 5m

SINGLE MODE



G657 1,8 mini zip cable LC/PC ultra short : LC/PC ultra short

2061531-1	FOSM G657 Lead 1.8MZ LC Ultra Short 1m
2061531-2	FOSM G657 Lead 1.8MZ LC Ultra Short 2m
2061531-3	FOSM G657 Lead 1.8MZ LC Ultra Short 3m
2061531-5	FOSM G657 Lead 1.8MZ LC Ultra Short 5m

NOTE : Other types of assemblies on request


PRODUCT DIMENSIONS

Ultra Short

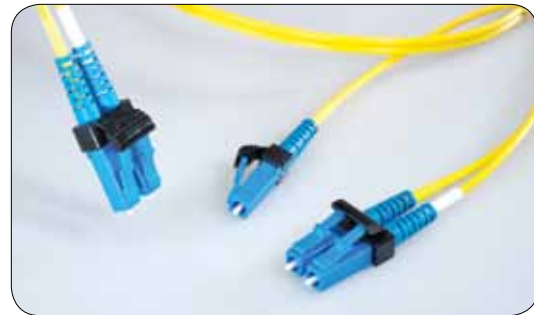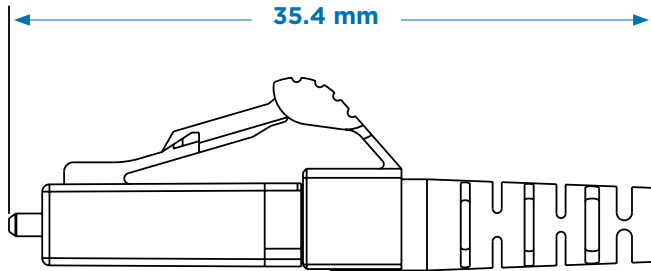

Simplex and Duplex version of Ultra Short LC

Standard LC

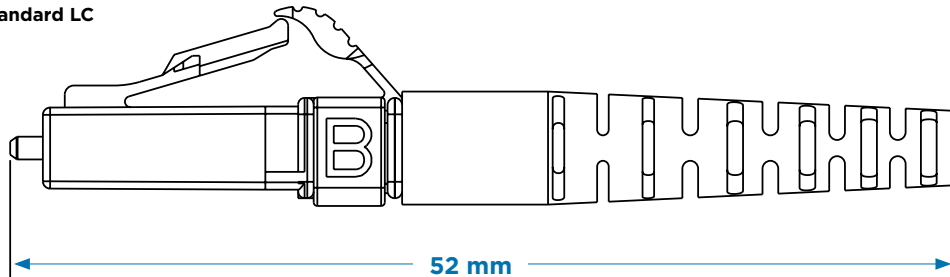

FOR MORE INFORMATION

te.com/products/UltraShortLC

TE Technical Support Center

Internet	te.com/help
USA:	+1 (800) 522-6752
Canada:	+1 (905) 475-6222
Mexico	+52 (0) 55-1106-0800
Latin/S. America:	+54 (0) 11-4733-2200
Germany:	+49 (0) 6251-133-1999
UK:	+44 (0) 800-267666
France:	+33 (0) 1-3420-8686
Netherlands:	+31 (0) 73-6246-999
China:	+86 (0) 400-820-6015

Part numbers in this brochure are RoHS Compliant*, unless marked otherwise.

*as defined www.te.com/leadfree

te.com

© 2011 Tyco Electronics Corporation, a TE Connectivity Ltd. company. All Rights Reserved.

4-1773461-4 CIS FP 3M 06/2011

TE Connectivity, TE connectivity (logo) and TE (logo) are trademarks. Other logos, product and/or company names might be trademarks of their respective owners.

While TE has made every reasonable effort to ensure the accuracy of the information in this brochure, TE does not guarantee that it is error-free, nor does TE make any other representation, warranty or guarantee that the information is accurate, correct, reliable or current. TE reserves the right to make any adjustments to the information contained herein at any time without notice. TE expressly disclaims all implied warranties regarding the information contained herein, including, but not limited to, any implied warranties of merchantability or fitness for a particular purpose. The dimensions in this catalog are for reference purposes only and are subject to change without notice. Specifications are subject to change without notice. Consult TE for the latest dimensions and design specifications.



X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Fiber Optic Cable Assemblies](#) category:

Click to view products by [TE Connectivity](#) manufacturer:

Other Similar products are found below :

[7-21002-9](#) [760-1518](#) [FA04390-50-M-72-LC-N](#) [MLB 501 V RED](#) [MLB 501 V YELLOW](#) [8-21000-7](#) [8-21084-1](#) [FXE3-10BM15](#) [FXE3-10FM5](#) [FZB3-NM1](#) [1-3636-600-5208](#) [1-5018030-0](#) [ICD040GVP163D-07](#) [2901797](#) [1-6693182-0](#) [1754898-1](#) [F512D5-5F23Y](#) [F912B10-NM2](#) [FAP12WFDBDBDLCZ](#) [21055-6](#) [FXBSCSCE2LM002](#) [FXE3-10AM10](#) [FXE3-10AM20](#) [FXE3-10BM7](#) [FXE3-10FM15](#) [FXE3-10FM3](#) [FXE3-10FM4](#) [FXE3-10FM7](#) [FXE3-10GM3](#) [FZE10-10M6](#) [FZOPE10-10M5](#) [3000005](#) [3-21053-2](#) [MLB 200/1 V BLACK](#) [MLB 2001 V YELLOW](#) [MLB 501 V BLACK](#) [5492011-6](#) [106284-7000](#) [5492011-5](#) [5492011-8](#) [5492011-9](#) [CF-901201-007](#) [7-21000-4](#) [8-21007-5](#) [8-21084-0](#) [3-5106081-0](#) [106386-4447](#) [2-2064140-6](#) [F92ELLNSNSNM003](#) [2-2064140-3](#)