

LED light bar OPBxx2835-05824WL - PRODUCT DATASHEET



Voltage	24 V DC
Power	12,0 W/m
Luminocity	1400 lm/m
Qty LED	58 LED/m
Distance between LED	17,1 mm
Can be cut into section	12 cm

Powered by

Basic information:

- PL LINE PRODUCT- PROFESSIONAL LINE, HIGHEST QUALITY, LUMINOSITY AND DURABILITY
- PROFESSIONAL PCB MOUNTING, ONLY BRAND-NAME LED DIODES (LITEON)
- MODULES CAN BE SPLIT INTO 12 CM SECTIONS (7LED)
- MODULES CAN BE JOINED INTO LONGER STRINGS (MAXIMUM LENGHT OF LED SECTION WITH ONE POWER-SUPPLY POINT: 5M)

Typical application:

- UTILITY LIGHTING
- CEILING, WALL, NICHE, SHELF, PASSAGEWAYS BACKLIGHTING
- ADVERTISING (SIGNBOARDS): SHOP, MUSEUM, TARDE FAIRS EXPOSITIONS ETC.
- KITCHEN WORKTOPS LIGHTING

Explanation:

- "xx" - COLOR DESIGNATION E.G. WH, WN AND WW



UWAGA
ZACHOWAĆ OSTROŻNOŚĆ
ELEMENTY WRAŻLIWE
NA WYSOKOPRĄDZIE
ELEKTROSTATYCZNE




PRODUKT WYKONANY
Z PODZESPOŁÓW
ZGODNYCH Z NORMĄ
RoHS



IP20

Additional Information

Color	Cool white WH	Neutral white WN	Warm white WW
Voltage		24 V DC	
Power		12,0 W/m	
Power of single LED		0,21 W	
Current		0,5 A/m	
Luminocity	1400 lm/m	1400 lm/m	1360 lm/m
Qty LED		58 LED/m	
Distance between LED		17,1 mm	
Can be cut into section		12 cm	
Width		10 mm	
Height		3 mm	
Color temperature / Wavelength scope	5000 K	4000 K	3000 K
Beam angle		120°	
Color rendering index (Ra)		80	
Operating temperature		-25 - +60°C	
Storage temperature		-40 - +80°C	
IP degree		IP20	

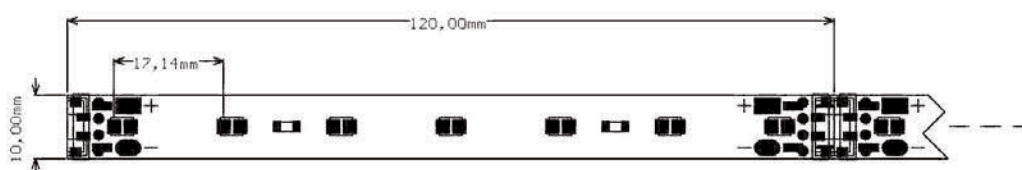

In spite of all our efforts, we do not guarantee, that technical data doesn't include any mistakes or defects, which can't be basis of any claiming. Figures and pictures are for illustration only and can be different from authentic appearance of product.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [LED Lighting Bars and Strips](#) category:

Click to view products by [Optoflash](#) manufacturer:

Other Similar products are found below :

[ZLF0310W62524](#) [LF1D-F2F-2W-300](#) [HH-SWW320F210W24-COB IP65](#) [HH-SNW320F210W12-COB IP65](#) [HH-SNW320F010W12-COB IP20](#) [HH-SNW320F210W24-COB IP65](#) [HH-SNW320F010W24-COB IP20](#) [HH-SNW528F210W12-COB IP65](#) [HH-SNW528F010W12-COB IP20](#) [HH-SNW528F010W24-COB IP20](#) [HH-SCW320F210W12-COB IP65](#) [HH-SCW320F010W12-COB IP20](#) [HH-SCW528F210W12-COB IP65](#) [HH-SCW528F010W12-COB IP20](#) [HH-SR528F010W12-COB IP20](#) [HH-SR528F010W24-COB IP20](#) [LF2D-EN2F-2W-A](#) [PUUA-100LLL-NK2P](#) [HC-F12V-3535 PCBA](#) [HC-F12V-WS2811-3535](#) [HC-F24V-6L-36LED-W-WS2821/IP20](#) [HC-F5V-144L-144LED-B-WS2813 IP20](#) [HC-F5V-144L-144LED-B-WS2813 IP65](#) [HC-F5V-144L-144LED-W/IP65](#) [HC-F5V-144L-144LED-W-WS2813 IP20](#) [HC-F5V-30L-30LED-B-WS2813 IP20](#) [HC-F5V-60L-60LED-B-WS2813 IP20](#) [HC-F5V-60L-60LED-W-WS2813 IP65](#) [HC-T12V-10L-30LED-W/IP20](#) [HC-T12V-16L-48LED-W/IP20](#) [HC-T12V-16L-48LED-W/IP65](#) [HC-T12V-20L-60LED-W/IP65](#) [LFBHL-SW860-24V-12D83-20](#) [LFBLL-SW860-24V-5S200-20-IC](#) [LFBML-MW827860-24V-12D83-20](#) [LFBML-SW827-24V-6S167-20](#) [LM-SAG1-W2](#) [LMV-MINI-W2](#) [LS-2835W120RN](#) [LS-2835W120RN1](#) [LS-2835W60RN2](#) [LS-2835WW120R-1](#) [LS-2835WW60RN](#) [LS-3014WW60RN](#) [LS-3014WW60RN3](#) [LS-3528W60RN-1](#) [LS-3528W60RN-2](#) [LS-5050F60R-2](#) [LS-5050F60RN-3](#) [LS-5050W30RN](#)