



# SURFACE MOUNT ALUMINUM ELECTROLYTIC CAPACITORS



## CA Chip type, Long Life Series



- Chip type, long life capacitance in large case sizes
- Chip type with load life of 5000 hours at 105°C
- Designed for surface mounting on high density PC board
- Applicable to automatic insertion machine using carrier tape
- Complied to the RoHS directive




Item	Characteristics																					
Operating temperature range	-55 ~ +105°C																					
Leakage current max.	I = 0.01CV or 3μA whichever is greater (after 2 minutes)																					
Capacitance tolerance	±20% at 120Hz, 20°C																					
Dissipation factor max. (at 120Hz, 20°C)	<table border="1"> <tr> <td>WV</td> <td>6.3</td> <td>10</td> <td>16</td> <td>25</td> <td>35</td> <td>50</td> </tr> <tr> <td>tanδ</td> <td>0.28</td> <td>0.24</td> <td>0.2</td> <td>0.16</td> <td>0.13</td> <td>0.12</td> </tr> </table>	WV	6.3	10	16	25	35	50	tanδ	0.28	0.24	0.2	0.16	0.13	0.12							
	WV	6.3	10	16	25	35	50															
tanδ	0.28	0.24	0.2	0.16	0.13	0.12																
Low temperature characteristics (Impedance ratio at 120Hz)	<table border="1"> <tr> <td>WV</td> <td>6.3</td> <td>10</td> <td>16</td> <td>25</td> <td>35</td> <td>50</td> </tr> <tr> <td>Z-25°C/Z+20°C</td> <td>2</td> <td>2</td> <td>2</td> <td>3</td> <td>3</td> <td>3</td> </tr> <tr> <td>Z-55°C/Z+20°C</td> <td>4</td> <td>4</td> <td>3</td> <td>3</td> <td>3</td> <td>3</td> </tr> </table>	WV	6.3	10	16	25	35	50	Z-25°C/Z+20°C	2	2	2	3	3	3	Z-55°C/Z+20°C	4	4	3	3	3	3
	WV	6.3	10	16	25	35	50															
	Z-25°C/Z+20°C	2	2	2	3	3	3															
Z-55°C/Z+20°C	4	4	3	3	3	3																
Load life (after application of the rated voltage for 5000 hours at 105°C)	Leakage current	Less than specified value																				
	Capacitance change	Within ±30% of initial value																				
	tanδ	Less than 300% of specified value																				
Shelf life (at 105°C)	After 1000 hours no load test, leakage current, capacitance and tanδ are same as load life value. The measurement shall be performed at 20°C by the KS C IEC 60384 - 4																					
Resistance to soldering heat	The following specifications shall be satisfied when the capacitors are restored to 20°C after exposing them at 250°C for 10 seconds.																					
	Leakage current	Less than specified value																				
	Capacitance change	Within ±10% of initial value																				
	tanδ	Less than specified value																				

### DRAWING

Unit : mm

-Series code of CA is "A"

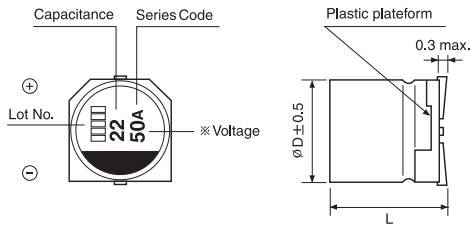

\* Please refer to drawing for CK Series in page 69 for detail drawing.

### DIMENSIONS & MAXIMUM PERMISSIBLE RIPPLE CURRENT

μF \ WV	6.3	10	16	25	35	50
10						6.3×5.8 30
22				6.3×5.8 38	6.3×5.8 42	6.3×7.7 120
33			6.3×5.8 40	6.3×5.8 48	6.3×7.7 57	8×10 140
47		6.3×5.8 46	6.3×5.8 50	6.3×7.7 63	8×10 92	8×10 170
100	6.3×5.8 60	6.3×7.7 81	6.3×7.7 81	8×10 116	10×10 151	10×10 310
220	6.3×7.7 101	8×10 141	10×10 216	10×10 216	10×10 216	
330	8×10 160	10×10 238	10×10 238	10×10 238		
470	10×10 254	10×10 254	10×10 254			
1000	10×10 313					

← Ripple current (mA rms) at 105°C, 120Hz  
 ↑ Case size ØD×L (mm)

### FREQUENCY COEFFICIENT OF PERMISSIBLE RIPPLE CURRENT

Frequency	50Hz	120Hz	300Hz	1kHz	10kHz≤
Coefficient	0.70	1.00	1.17	1.36	1.50

CHIP TYPES

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Aluminium Electrolytic Capacitors - SMD category](#):*

*Click to view products by [Samwha manufacturer](#):*

Other Similar products are found below :

[GA0402A270FXBAC31G](#) [RVB-50V330MG10UQ-R](#) [RVJ-50V101MH10U-R](#) [RVZ-35V151MH10U-R2](#) [RC0J226M04005VR](#)  
[RC0J476M05005VR](#) [RC1A227M08010VR](#) [RC1C226M05005VR](#) [RC1C476M6L005VR](#) [RC1E107M6L07KVR](#) [RC1E336M6L005VR](#)  
[RC1H106M6L005VR](#) [RC1H475M05005VR](#) [RC1V227M10010VR](#) [RC1V476M6L006VR](#) [50SEV1M4X5.5](#) [TYEH1A336E55MTR](#)  
[TYEH1H106F55MTR](#) [TYEH1V106E55MTR](#) [35SEV47M6.3X8](#) [35SGV220M10X10.5](#) [VES2R2M1HTR-0405](#) [VZH102M1ATR-1010](#)  
[50SEV10M6.3X5.5](#) [50SGV1M4X6.1](#) [SC1C476M05005VR](#) [SC1E107M0806BVR](#) [SC1E227M08010VR](#) [SC1H106M05005VR](#)  
[SC1H106M6L005VR](#) [SC1H227M10010VR](#) [SC1H335M04005VR](#) [CE4.7/50-SMD](#) [VEJ4R7M1VTR-0406](#) [VZH331M1ETR-0810](#)  
[VES101M1CTR-0605](#) [TYEH1H475E55MTR](#) [6.3SEV22M4X5.5](#) [6.3SEV47M4X5.5](#) [EEEFK1H151GP](#) [EEEFK1A681GP](#) [EEE0GA471XP](#)  
[EEEFK1V151GP](#) [RC1V107M6L07KVR](#) [VZH101M1VTR-0810](#) [VE010M1HTR-0405](#) [GYA1V151MCQ1GS](#) [EEH-ZC1J680P](#) [EEH-](#)  
[ZK1V181P](#) [GYA1V271MCQ1GS](#)