



■ DIMENSIONS (mm)

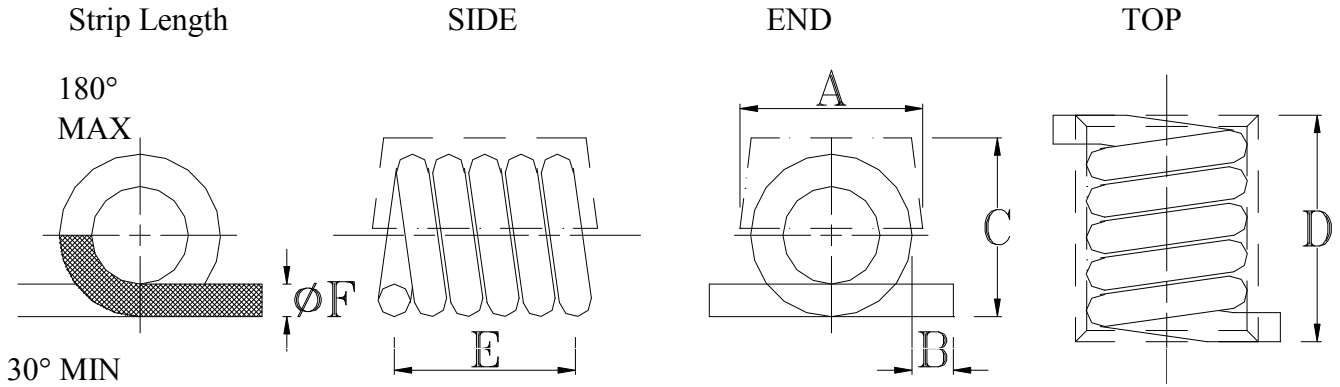

No.	SERIES	Size (mm)				
		A	B	C	D	E
1	JAS3136	3.05(MAX)	0.58 ± 0.38	3.18(MAX)	3.68(MAX)	2.92 ± 0.25
2	JAS3168	3.05(MAX)	0.58 ± 0.38	3.18(MAX)	6.86(MAX)	5.84 ± 0.25
1	JAS1322	1.42 ± 0.13	0.89 ± 0.25	1.37 ± 0.15	2.21 ± 0.25	1.83 ± 0.25
2	JAS1340	1.42 ± 0.13	0.89 ± 0.25	1.37 ± 0.15	4.04 ± 0.30	3.66 ± 0.30


■ RECOMMENDED PATTERN

Type	A	B	C	D	E
JAS3136	4.19	3.3	1.65	2.79	1.27
JAS3168	7.24	0.3	4.7	2.79	1.27
JAS1322	2.62	2.46	1.04	1.02	0.79
JAS1340	4.45	2.46	2.87	1.02	0.79



■ TAPE DIMENSIONS (mm)

SIZE	W	P
JAS3136	12	8
JAS3168	16	8
JAS1322	8	8
JAS1340	12	8

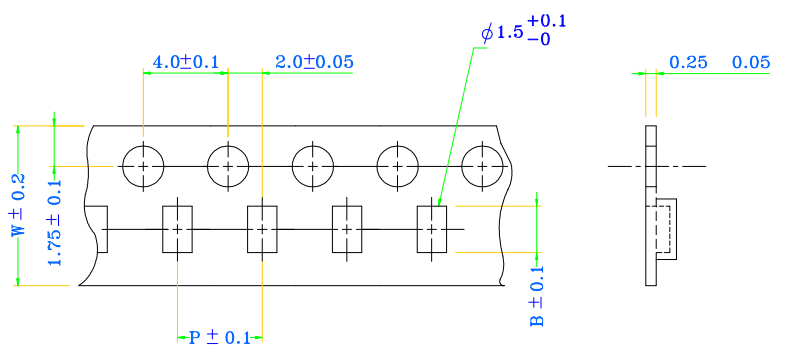

Typical Pad Layout


SERIES LIST

No.	Part No	Inductance (nH)	Q	Test Freq (MHz)	RDC (mΩ) MAX	SRF (GHz) Min.	IDC (A) Max.	Turns
1	JAS3136-2.5	2.5	145	150	1.1	12.5	4	1
2	JAS3136-5	5.0	140	150	1.8	6.5	4	2
3	JAS3136-8	8.0	140	150	2.6	5	4	3
4	JAS3136-12.5	12.5	137	150	3.4	3.3	4	4
5	JAS3136-18.5	18.5	132	150	3.9	2.5	4	5
6	JAS3168-17.5	17.5	100	150	4.5	2.2	4	6
7	JAS3168-22	22	102	150	5.2	2.1	4	7
8	JAS3168-28	28	105	150	6	1.8	4	8
9	JAS3168-35.5	35.5	112	150	6.8	1.5	4	9
10	JAS3168-43.5	43.5	106	150	7.9	1.2	4	10
11	JAS1322-1.65	1.65	100	800	4	10	1.6	2
12	JAS1322-2.55	2.55	100	800	5	8.2	1.6	3
13	JAS1322-3.85	3.85	100	800	6	7.5	1.6	4
14	JAS1322-4.45	4.45	100	800	8	7	1.6	5
15	JAS1340-5.6	5.6	100	800	9	6.5	1.6	6
16	JAS1340-7.15	7.15	100	800	10	6	1.6	7
17	JAS1340-8.8	8.8	100	800	12	6	1.6	8
18	JAS1340-9.85	9.85	100	800	13	5.2	1.6	9
19	JAS1340-12.55	12.55	100	800	14	4.6	1.6	10

RELIABILITY PERFORMANCE

No	Test Item	Test Conditions
1	Temp cycling	1. +125°C±5°C for 30 min ~ +25°C±5°C for 2 hrs ~ -40±5°C for 30 min 2. Total : 10 cycles
2	Biased humidity	1. Temperature : +60°C±2°C 2. R.H : 90%±5% 3. Total : 96 hrs
3	Thermal shock	1. +125°C±3°C for 30 min ~ -65°C-5°C for 30 min 2. Time of temperature shift 2 min 3. Total : 50 cycles
4	High temperature exposure(storage)	1. Temperature : +125°C±2°C 2. Total : 48±2 hrs
5	Low temperature storage	1. Temperature : -40°C±2°C 2. Total : 48±2 hrs
6	Salt spraying	1. Chamber temperature : 35°C 2. 5% concentration of salt sprayed 3. Total : erode for 24 hrs
7	Vibrating test	1. Frequency : 10-55-10 HZ 2. Amplitude : 1.5 mm 3. Direction : X, Y, Z 4. Time : 2 hrs for each direction, total 6 hrs

8. TYPICAL RoHS REFLOW PROFILE

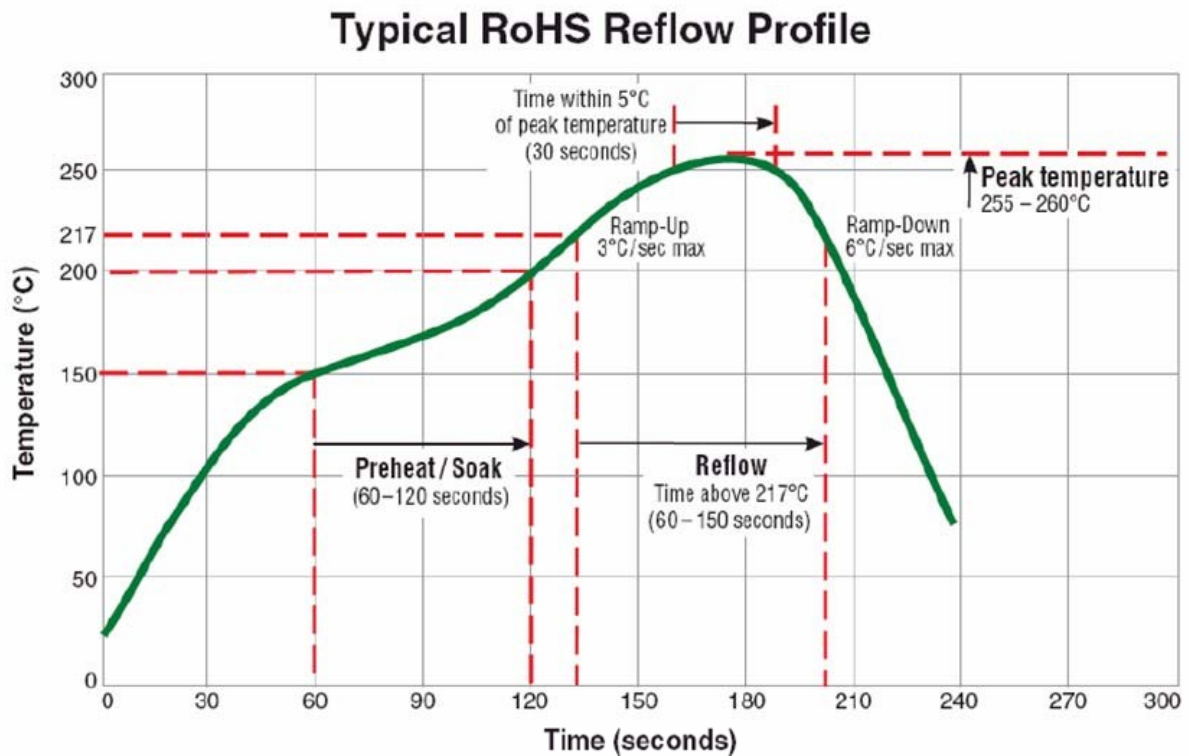

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Fixed Inductors](#) category:

Click to view products by [Ferrocore](#) manufacturer:

Other Similar products are found below :

[MLZ1608M6R8WTD25](#) [MLZ1608N6R8LT000](#) [MLZ1608N3R3LTD25](#) [MLZ1608N3R3LT000](#) [MLZ1608N150LT000](#)
[MLZ1608M150WTD25](#) [MLZ1608M3R3WTD25](#) [MLZ1608M3R3WT000](#) [MLZ1608M150WT000](#) [MLZ1608A1R5WT000](#)
[MLZ1608N1R5LT000](#) [B82432C1333K000](#) [PCMB053T-1R0MS](#) [PCMB053T-1R5MS](#) [PCMB104T-1R5MS](#) [CR32NP-100KC](#) [CR32NP-151KC](#) [CR32NP-180KC](#) [CR32NP-181KC](#) [CR32NP-1R5MC](#) [CR32NP-390KC](#) [CR32NP-3R9MC](#) [CR32NP-680KC](#) [CR32NP-820KC](#)
[CR32NP-8R2MC](#) [CR43NP-390KC](#) [CR43NP-560KC](#) [CR43NP-680KC](#) [CR54NP-181KC](#) [CR54NP-470LC](#) [CR54NP-820KC](#) [CR54NP-8R5MC](#)
[MGDQ4-00004-P](#) [MGDU1-00016-P](#) [MHL1ECTTP18NJ](#) [MHL1JCTTD12NJ](#) [PE-51506NL](#) [PE-53601NL](#) [PE-53630NL](#) [PE-53824SNLT](#) [PE-62892NL](#) [PE-92100NL](#) [PG0434.801NLT](#) [PG0936.113NLT](#) [PM06-2N7](#) [PM06-39NJ](#) [HC2LP-R47-R](#) [HC2-R47-R](#) [HC3-2R2-R](#) [HC8-1R2-R](#)