




**SPECIFICATION:**  
 1. RATING : DC 30V 0.3A  
 2. CONTACT RESISTANCE : 30mΩ Max.  
 3. INSULATOR RESISTANCE: 100MΩ Min at DC 500V for 1 Minute.  
 4. WITHSTANDING VOLTAGE: AC 500V (50Hz or 60Hz) for 1 Minute.

<b>PIN</b>	$\phi 2.0$	$\phi 2.5$
<b>APPD</b>	<b>C</b>	<b>D</b>

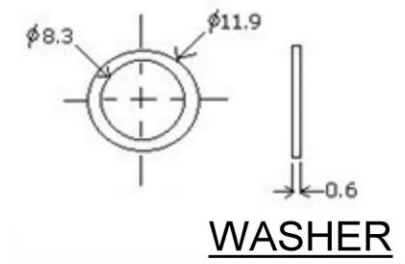

PC.B LAYOUT TOP MEW

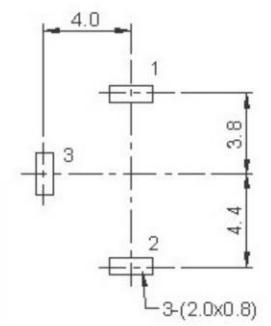

4	AXIS SUPPORT	BRASS	1	Ni -Plating
3	PIN	BRASS	1	Ni -Plating
2	TERMINAL	BRASS	3	Ag -Plating
1	HOUSING	PBT	1	BLACK
NO.	DESCRIPTION	MATERAL	QTY.	PLATING

**RoHS Compliant**

APPD. 核准 HELEN	SCALE 比例 参考	TOLERANCE 容许公差 0 ±0.1 .00 ±0.05 ANG. ±
DWG. 製圖 ABBY	UNIT 單位 MM	SIZE. 紙張尺寸 A4
DATE 制表日 2011/11/29	PAGE 張數 1 OF 1	REV. 版次 B

PART NAME 品名 DC POWER JACK DIP TYPE $\phi 2.0$ mm or $\phi 2.5$ mm NORMAL CLOSE SLIVER PLATING WITH THREAD BLACK INSULATOR WASSY.(NUT+WASHER) ROHS
PART NO. 料號 PC-G2.5-PCB

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [DC Power Connectors](#) category:*

*Click to view products by [Ninigi](#) manufacturer:*

Other Similar products are found below :

[1600206-1](#) [163-0301-EX](#) [163-0302](#) [163-0308-EX](#) [163-0310-EX](#) [163-1061-EX](#) [163-1100-EX](#) [163-4024](#) [163-4117-EX](#) [163-4118-EX](#) [163-5005-E](#) [163-7421](#) [163-MJ22-EX](#) [171-0721-EX](#) [171-0725-EX](#) [171-3118-EX](#) [171-3210-E](#) [171-3221-EX](#) [171-3222-EX](#) [171-A1326-EX](#) [173-23507-ST-EX](#) [173-5521TIP-EX](#) [173-6330TIP-EX](#) [KLDVX-SMT-02-ATR](#) [KLDX-0201-AHT-1](#) [KLDX-0202-AHT](#) [KLDX-SMT-0202-BP](#) [KLDX-SMT-0202-BPTR](#) [163-0179-EX](#) [163-0307-E](#) [163-0309-EX](#) [163-4007-EX](#) [163-4015-EX](#) [163-4025](#) [163-4119-E](#) [163-4303-E](#) [16PJ101-EX](#) [171-0702-EX](#) [171-0722-E](#) [171-0726-EX](#) [171-2122-EX](#) [171-3216-EX](#) [171-3218-EX](#) [171-3219-EX](#) [171-3220-EX](#) [171-7391](#) [173-3413-ST-EX](#) [173-4017-ST-EX](#) [RAPCBRK](#) [K596](#)