


MULTIFLEX 512®-PUR special cable for drag chains, halogen-free, meter marking

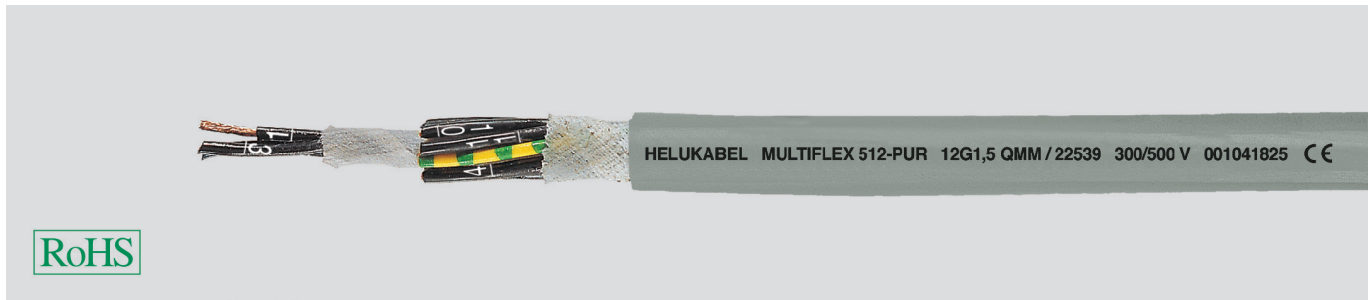

Technical data

- Special drag chain cables for high mechanical stress, adapted to DIN VDE 0285-525-2-21 / DIN EN 50525-2-21
- **Temperature range**
flexing -30°C to +80°C
fixed installation -40°C to +80°C
- **Nominal voltage** U₀/U 300/500 V
- **Test voltage** 3000 V
- **Insulation resistance**
min. 100 MΩ x km
- **Minimum bending radius**
flexing 5x cable Ø
fixed installation 3x cable Ø
- **Alternating bending cycles**
approx. **10 million**
- **Radiation resistance**
up to 50x10⁶ cJ/kg (up to 50 Mrad)

Cable structure

- Bare copper, extra fine wire conductors, bunch stranded to DIN VDE 0295 cl.6, col. 4, BS 6360 cl.6 and IEC 60228 cl.6
- Core insulation of special PP
- Core identification black cores with continuous white numbering
- GN-YE conductor, 3 cores and above in the outer layer
- Cores stranded in layers with optimal selected lay-length
- Special core wrapping over each layer (up to 4 mm² without core wrapping over the outer layer)
- Outer sheath of special **full-polyurethane** TMPU, to DIN VDE 0207-363-10-2 / DIN EN 50363-10-2
- Colour grey (RAL 7001) outer surface mat
- with meter marking

Properties

- Very good oil resistant
- Guaranteed permanent application in multi-shift operation under extreme high bending stress
- Adhesion-low
- High resistant to mechanical strain
- High property of alternating bending strength
- Long life durabilities through low friction-resistance by using the PP-insulation
- High tensile strength-, abrasion- and impact resistant at low temperature
- **Resistant to** weather, ozone and UV-radiation, solvents, acids and alkalis, hydraulic liquidity and hydrolysis
- The materials used in manufacture are cadmium-free and contain no silicone and free from substances harmful to the wetting properties of lacquers

Note

- AWG sizes are approximate equivalent values. The actual cross-section is in mm².
- G = with green-yellow conductor
x = without green-yellow conductor (OZ)
- Cleanroom qualification tested with analog type. Please note "cleanroom qualified" when ordering.
- screened analogue type:
MULTIFLEX 512®-C-PUR

Application

The special cables for drag chains are used for permanent flexible applications in machineries, machine tools, robot technics, for movable automated machinery parts and multi-shift operation. Those cables are developed according to the newest state of technology improvement. These high flexible control cables with sliding abilities guaranteed an optimum service life durabilities and also very economic by using the PP-core insulation and the PUR-outer sheath. The PUR material is adhesion-low and cut-resistant. For applications which go beyond standard solutions (for example for composting appliances or high shelf conveyors with extremely high processing speeds etc.) we recommend for our especially developed enquiry sheet for energy guiding systems. Before installation in cable trays please read the instructions. Further technical details see selection table for drag chain cables, see lead text.

CE= The product is conformed with the EC Low-Voltage Directive 2006/95/EC.

Part no.	No. cores x cross-sec. mm ²	Outer Ø app. mm	Cop. weight kg / km	Weight app. kg / km	AWG-No.	Part no.	No. cores x cross-sec. mm ²	Outer Ø app. mm	Cop. weight kg / km	Weight app. kg / km	AWG-No.
22501	2 x 0,5	5,5	9,6	38,0	20	22512	2 x 0,75	6,2	14,4	47,0	19
22502	3 G 0,5	5,8	14,4	46,0	20	22513	3 G 0,75	6,5	21,6	58,0	19
22503	4 G 0,5	6,4	19,0	59,0	20	22514	4 G 0,75	7,0	29,0	69,0	19
22504	5 G 0,5	7,0	24,0	68,0	20	22515	5 G 0,75	7,8	36,0	85,0	19
22505	7 G 0,5	8,1	33,6	88,0	20	22516	7 G 0,75	9,0	50,0	118,0	19
22506	12 G 0,5	9,9	58,0	131,0	20	22517	12 G 0,75	11,0	86,0	183,0	19
22507	18 G 0,5	11,5	86,0	197,0	20	22518	18 G 0,75	13,0	130,0	270,0	19
22508	20 G 0,5	12,0	96,0	260,0	20	22519	20 G 0,75	13,5	144,0	290,0	19
22509	25 G 0,5	13,7	120,0	282,0	20	22520	25 G 0,75	15,4	180,0	374,0	19
22510	30 G 0,5	14,3	144,0	315,0	20	22521	30 G 0,75	16,2	216,0	420,0	19
22511	36 G 0,5	15,3	172,0	374,0	20	22522	36 G 0,75	17,6	259,0	498,0	19

Continuation ▶

MULTIFLEX 512®-PUR special cable for drag chains, halogen-free, meter marking



Part no.	No. cores x cross-sec. mm²	Outer Ø app. mm	Cop. weight kg / km	Weight app. kg / km	AWG-No.
22523	2 x 1	6,9	19,2	55,0	18
22524	3 G 1	7,4	29,0	70,0	18
22525	4 G 1	8,0	38,0	86,0	18
22526	5 G 1	8,7	48,0	102,0	18
22527	7 G 1	10,2	67,0	143,0	18
22528	12 G 1	12,6	115,0	225,0	18
22529	18 G 1	14,8	173,0	334,0	18
22530	20 G 1	15,8	192,0	370,0	18
22531	25 G 1	18,1	240,0	460,0	18
22532	30 G 1	18,5	288,0	530,0	18
22533	36 G 1	20,1	346,0	625,0	18
22878	41 G 1	22,0	410,0	779,0	18
22879	50 G 1	24,0	498,0	953,0	18
22880	65 G 1	27,2	650,0	1205,0	18
22534	2 x 1,5	7,6	29,0	70,0	16
22535	3 G 1,5	8,1	43,0	90,0	16
22536	4 G 1,5	8,7	58,0	106,0	16
22537	5 G 1,5	9,7	72,0	145,0	16
22538	7 G 1,5	11,3	101,0	205,0	16
22539	12 G 1,5	13,8	173,0	320,0	16
22540	18 G 1,5	16,3	259,0	465,0	16
22541	20 G 1,5	17,3	288,0	510,0	16
22542	25 G 1,5	19,8	360,0	650,0	16
22543	30 G 1,5	20,3	432,0	750,0	16
22544	36 G 1,5	22,2	518,0	880,0	16
22881	42 G 1,5	24,0	628,0	1209,0	16
22882	50 G 1,5	26,2	749,0	1449,0	16
22883	61 G 1,5	28,9	912,0	1712,0	16

Part no.	No. cores x cross-sec. mm²	Outer Ø app. mm	Cop. weight kg / km	Weight app. kg / km	AWG-No.
22545	2 x 2,5	9,2	48,0	115,0	14
22546	3 G 2,5	9,7	72,0	162,0	14
22547	4 G 2,5	10,5	96,0	196,0	14
22548	5 G 2,5	11,6	120,0	230,0	14
22549	7 G 2,5	13,8	168,0	312,0	14
22550	12 G 2,5	16,9	288,0	532,0	14
22551	18 G 2,5	20,0	432,0	762,0	14
22552	20 G 2,5	21,2	480,0	858,0	14
22553	25 G 2,5	24,4	600,0	998,0	14
22554	4 G 4	13,2	154,0	283,0	12
22555	5 G 4	14,6	192,0	349,0	12
22556	7 G 4	17,6	269,0	498,0	12
22557	4 G 6	14,4	230,0	432,0	10
22558	5 G 6	15,9	288,0	529,0	10
22559	7 G 6	19,2	403,0	782,0	10
22560	4 G 10	18,4	384,0	685,0	8
22561	5 G 10	20,7	480,0	817,0	8
22562	7 G 10	24,7	672,0	1023,0	8
22563	4 G 16	21,3	614,0	1042,0	6
22564	5 G 16	23,8	768,0	1292,0	6
22565	7 G 16	28,6	1075,0	1709,0	6

Dimensions and specifications may be changed without prior notice. (RC02)

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Multi-Paired Cables](#) category:

Click to view products by [Helukabel](#) manufacturer:

Other Similar products are found below :

[7-21000-9](#) [9805 060100](#) [1416402/M12MS/IP20/10](#) [9804 060100](#) [9808 060100](#) [9843 060100](#) [9873 060100](#) [190-038045-00](#)
[44A0121-12-996CS2275](#) [44A0121-20-09-MX](#) [55PC0211-14-9](#) [55PC0216-24-9](#) [55PC0221-22-2/6CS2756](#) [55PC0811-16-9](#) [55PC0811-24-9](#)
[55PC1131-20-029-9](#) [Y60912](#) [CW1922-000](#) [RI55D](#) [9157 060100](#) [2020D0309-0](#) [9774 060100](#) [8334 060100](#) [1350SB 0101000](#) [8342 060100](#)
[8740 060U1000](#) [9505 060U1000](#) [3613 003A1000](#) [44A0121-22-0/9-MX](#) [2412 009U1000](#) [82777 8771000](#) [9406 T35100](#) [3613 D151000](#)
[1533R 0101000](#) [1533P 0101000](#) [9272 006U1000](#) [2413F D15A500](#) [9681 0601000](#) [44A0121-22-6/9-MX](#) [1533R 0061000](#) [RIT1000](#) [1533R](#)
[006A1000](#) [9812 060100](#) [2221 B59U1000](#) [10GX13 D151000](#) [1874A 004A1000](#) [8340 060100](#) [8333 0601000](#) [1533R 0021000](#) [1583A](#)
[012U1000](#)