


CMOS/ 3.3V/ 3.2x2.5mm

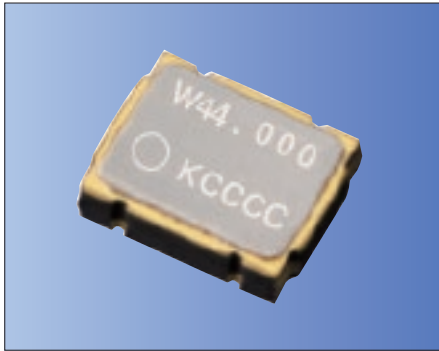

RoHS Compliant

Features

- Miniature ceramic package
- Highly reliable with seam welding
- CMOS output
- Supply voltage $V_{CC}=3.3V$
- $\pm 25 \times 10^{-6}$ available

Table 1

Freq. Tol. Code	Tol. $\times 10^{-6}$	Operating Temperature Range (°C)	Note
0	± 50	-10 to +70	Standard specifications
S	± 30		
U	± 25		
F	± 100	-40 to +85	With only certain frequencies
G	± 50		
6	± 50	-40 to +105	

How to Order

KC3225A 25.0000 C 3 0 E 00
① ② ③ ④ ⑤ ⑥ ⑦

- ① Type (3.2x2.5mm SMD)
- ② Output Frequency
- ③ Output Type (CMOS)
- ④ Supply Voltage (3.3V)
- ⑤ Frequency Tolerance (See Table 1)
- ⑥ Symmetry/ INH Function (45/ 55%, Stand-by)
- ⑦ Customer Special Model Suffix (STD Specification is "00")

Packaging (Tape & Reel 2000 pcs./ reel)


Specifications

Item	Symbol	Conditions	Min.	Max.	Units	
Output Frequency Range	f_o		1.5	125	MHz	
Frequency Tolerance	f_{tol}	Initial tolerance, Operating temperature range, Rated power supply voltage change, Load change, Aging (1 year @25°C), Shock and vibration	Op. Temp.: -40 to +85°C	-100	+100	$\times 10^{-6}$
			Op. Temp.: -10 to +70°C/ -40 to +85°C/ -40 to +105°C	-50	+50	
			Op. Temp.: -10 to +70°C	-30	+30	
			Op. Temp.: -10 to +70°C	-25	+25	
Storage Temperature Range	T_{stg}		-55	+125	°C	
Operating Temperature Range	T_{use}	Standard Specifications	-10	+70	°C	
		Extend (Option)	-40	+105		
Max. Supply Voltage	—		-0.5	+7.0	V	
Supply Voltage	V_{CC}	Freq. Tol.Code: 0, S, F	+2.97	+3.63	V	
		Freq. Tol.Code: U, G, 6	+3.14	+3.46		
Current Consumption (Maximum Loaded)	I_{CC}	1.5 $\leq f_o \leq 26$ MHz	—	6	mA	
		26 $< f_o \leq 50$ MHz	—	8		
		50 $< f_o \leq 67.5$ MHz	—	12		
		67.5 $< f_o \leq 95$ MHz	—	20		
		95 $< f_o \leq 125$ MHz	—	25		
Stand-by Current	I_{std}		—	10	μA	
Symmetry	SYM	@50% V_{CC}	45	55	%	
Rise/ Fall Time (10% V_{CC} to 90% V_{CC} Maximum Loaded)	t_r / t_f	1.5 $\leq f_o \leq 67.5$ MHz	—	5	ns	
		67.5 $< f_o \leq 125$ MHz	—	3		
Low Level Output Voltage	V_{OL}	$I_{OL}=4$ mA	—	10% V_{CC}	V	
High Level Output Voltage	V_{OH}	$I_{OH}=-4$ mA	90% V_{CC}	—	V	
CMOS Load	L_{CMOS}	CMOS Output	—	15	pF	
Input Voltage Range	V_{IN}		0	V_{CC}	V	
Low Level Input Voltage	V_{IL}		—	30% V_{CC}	V	
High Level Input Voltage	V_{IH}		70% V_{CC}	—	V	
Disable Time	t_{dis}		—	150	ns	
Enable Time	t_{ena}		—	5	ms	
Start-up Time	t_{str}	@Minimum operating voltage to be 0 sec.	—	10	ms	
1 Sigma Jitter	J_{Sigma}	Measured with Wavecrest SIA-3000	1.5 $\leq f_o \leq 60$ MHz	—	8	ps
			60 $< f_o \leq 125$ MHz	—	5	
Peak to Peak Jitter	J_{PK-PK}	Measured with Wavecrest SIA-3000	1.5 $\leq f_o \leq 60$ MHz	—	80	ps
			60 $< f_o \leq 125$ MHz	—	40	

Note: All electrical characteristics are defined at the maximum load and operating temperature range.
Please contact us for inquiry about operating temperature range, available frequencies and other conditions.


Dimensions

(Unit: mm)

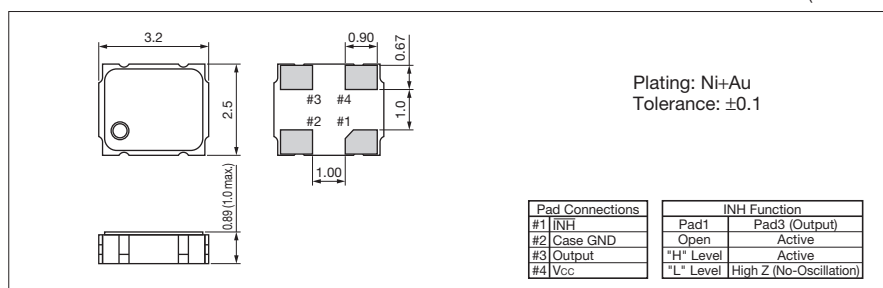

Recommended Land Pattern

(Unit: mm)

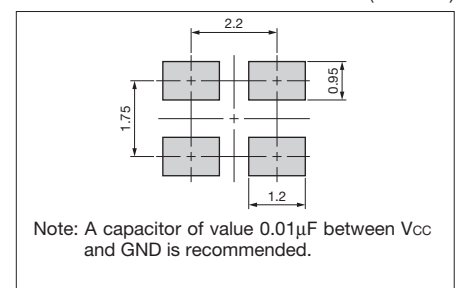

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Standard Clock Oscillators](#) category:

Click to view products by [Kyocera](#) manufacturer:

Other Similar products are found below :

[EP1400SJTSC-125.000M](#) [601137](#) [601252](#) [CSX750FBC-24.000M-UT](#) [CSX750FBC-33.333M-UT](#) [CSX750FCC-3.6864M-UT](#) [F335-12](#) [F335-25](#) [F535L-50](#) [DSC506-03FM2](#) [ASA-20.000MHZ-L-T](#) [ASA-25.000MHZ-L-T](#) [ASA-27.000MHZ-L-T](#) [ASV-20.000MHZ-LR-T](#) [ECS-2018-160-BN-TR](#) [EL13C7-H2F-125.00M](#) [MXO45HS-2C-66.6666MHZ](#) [NBXDBB017LN1TAG](#) [NBXHBA019LN1TAG](#) [SiT1602BI-22-33E-50.000000E](#) [SIT8003AC-11-33S-2.04800X](#) [SiT8256AC-23-33E-156.250000X](#) [SIT8918AA-11-33S-50.000000G](#) [SM4420TEV-40.0M-T1K](#) [SMA4306-TL-H](#) [F335-24](#) [F335-40](#) [F335-50](#) [F535L-10](#) [F535L-12](#) [F535L-16](#) [F535L-24](#) [F535L-27](#) [F535L-48](#) [PE7744DW-100.0M](#) [CSX750FBC-20.000M-UT](#) [CSX-750FBC33333000T](#) [CSX750FBC-4.000M-UT](#) [CSX750FBC-7.3728M-UT](#) [CSX750FBC-8.000M-UT](#) [CSX-750FCC14745600T](#) [CSX750FCC-16.000M-UT](#) [CSX-750FCC40000000T](#) [CSX750FCC-4.000M-UT](#) [ASA-22.000MHZ-L-T](#) [ASA2-26.000MHZ-L-T](#) [ASA-40.000MHZ-L-T](#) [ASA-48.000MHZ-L-T](#) [ASA-60.000MHZ-L-T](#) [ASF1-3.686MHZ-N-K-S](#)