



RSM-117-02-L-D



RSM-109-02-L-D



(1,27 mm) .050"

RSM SERIES

SMT MICRO SOCKET

SPECIFICATIONS

For complete specifications and recommended PCB layouts see www.samtec.com?RSM

Insulator Material:
Black Liquid Crystal Polymer
Contact Material:
Phosphor Bronze

Plating:
Au or Sn over
50µ" (1,27 µm) Ni

Current Rating (RSM/FTR):
3.1 A per pin
(1 pin powered per row)

Operating Temp Range:
-55°C to +125°C

Contact Resistance:
10 mΩ

Lead Size Accepted:
(0,46 mm) .018" SQ

Insertion Depth:
Top Entry = (2,64 mm) .104"
to (5,84 mm) .230" with
(0,38 mm) .015" wipe, or
pass-through.

Bottom Entry = (5,49 mm)
.216" minimum
(Add board thickness for
correct post OAL)

Insertion Force:
(Single contact only)
3.5 oz (0,97 N) avg.

Withdrawal Force:
(Single contact only)
1.5 oz (0,42 N) avg.

RoHS Compliant:
Yes

Processing:
Lead-Free Solderable:

Yes
SMT Lead Coplanarity:
(0,10 mm) .004" max

RECOGNITIONS


For complete scope of recognitions see www.samtec.com/quality



FILE NO. E111594 FILE NO. 090871_0_000

Mates with:
FTR, HTMS, HDWM,
DWM, TML, ZML, TMS







OPTIONS




ALSO AVAILABLE (MOQ Required)

- Other platings
- Locking clips
- Contact Samtec.

Optional Pick & Place Pad

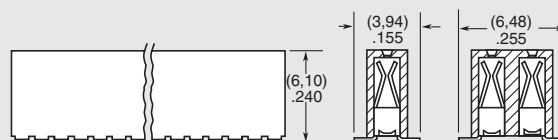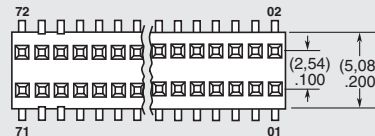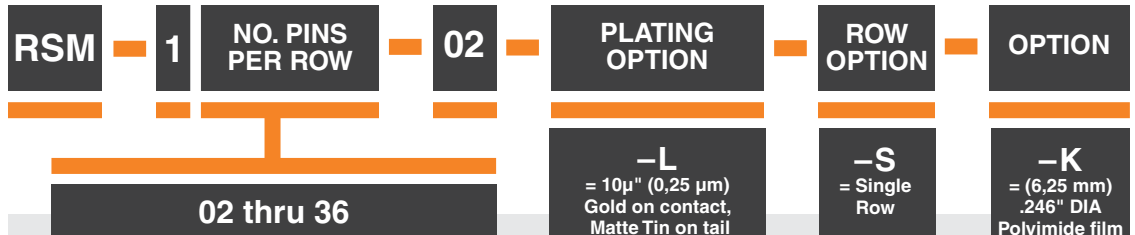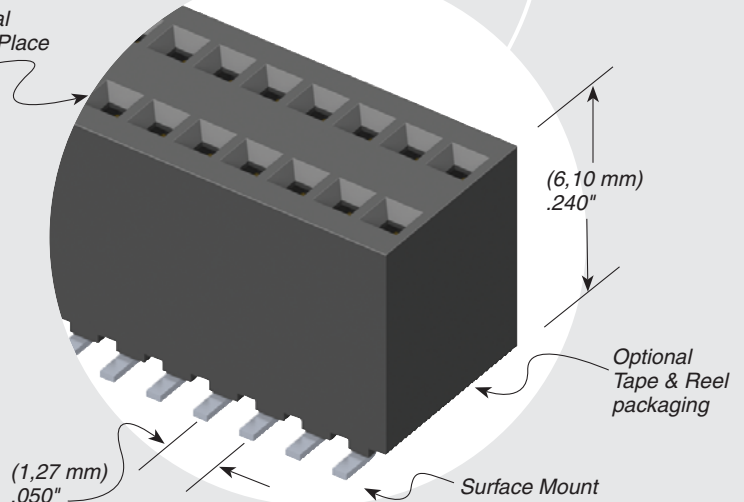

-S option Pick & Place Pad



-D option Pick & Place Pad

TAPE & REEL AVAILABILITY

No tooling charges.
Minimum order is the lesser of a full reel quantity or 125 pieces.
Order any quantity above minimum.
In-house design, manufacture.
Quick turn-around.

Call Samtec for specifications and ordering information.

Note: Some sizes, styles and options are non-standard, non-returnable.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Headers & Wire Housings](#) category:

Click to view products by [Samtec](#) manufacturer:

Other Similar products are found below :

[95000-104TRLF](#) [10135584-644402LF](#) [DF62W-EP2022PCA](#) [95000-106TRLF](#) [DF62W-2022SCA](#) [DF62W-EP2022PC](#) [2203348](#) [DF62W-2022SC](#) [1084018](#) [1029039](#) [1084017](#) [802-10-012-10-002000](#) [1112640](#) [1112639](#) [891-007-9SS-BST1T](#) [000-34000](#) [0008550134](#) [0009482033](#) [0009507031](#) [57102-F02-18ULF](#) [57102-S06-03LF](#) [57202-S52-04LF](#) [PCN6-15S-2.5E](#) [0039019024](#) [58102-G61-06LF](#) [582553-1](#) [0009485154](#) [0009508121](#) [0022285053](#) [0050291907](#) [018731A](#) [LY20-4P-DT1-P1E-BR](#) [02.125.8002.8](#) [60101931](#) [60598-1 \(Cut Strip\)](#) [M1625-3R/100](#) [61062-3](#) [61082-181009](#) [CSU011177004](#) [636-1427](#) [638009-1](#) [641938-9](#) [641991-4](#) [644168-1](#) [644827-2](#) [647662-1](#) [65039-019ELF](#) [65692-001LF](#) [65781-018](#) [65781-047](#)