
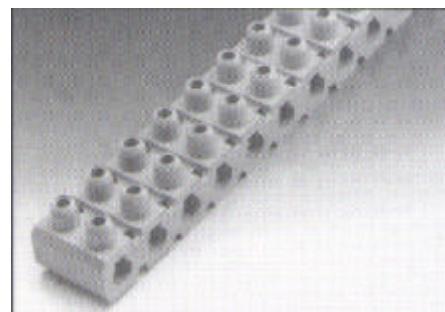


L1325/Ni FLEXIBLE TERMINAL BLOCK

- Heavy duty flexible terminal block
- 12 way

| | |
|-------------------------------|---|
| CURRENT RATING: | 43A (temperature rise <20° C above ambient) |
| TEMPERATURE RANGE: | -55° C to +70° C (ambient) |
| VOLTAGE PROOF: | 4 KV rms |
| INSULATION RESISTANCE: | ≥1000 megaohms |
| CREEPAGE DISTANCE | |
| BETWEEN TERMINALS: | 10.7mm |
| TERMINALS TO CHASSIS: | 6.3mm |
| HUMIDITY: | Class H6 (DEF-5011) |
| WIRE SIZE (MAXIMUM): | 7/1.35mm |
| WEIGHT (AVERAGE): | 158g |
| APPROVALS | DEF-5011 |

ORDERING REFERENCE: L1325/Ni

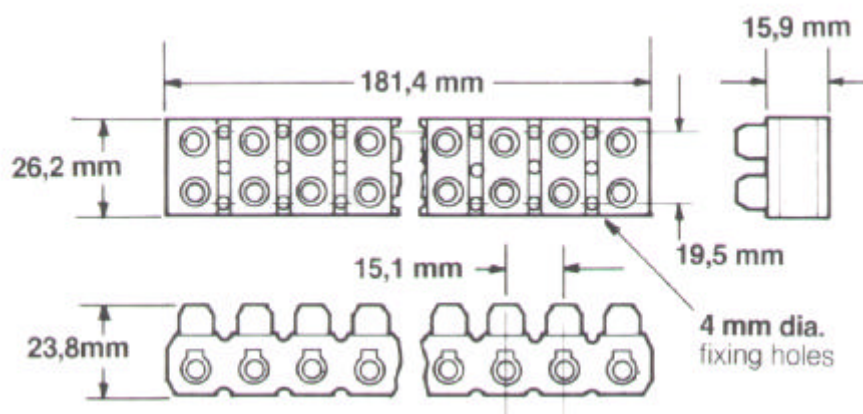

Dialight BLP reserve the right to change without prior notice the information contained within this leaflet

Dialight BLP Ltd., Exning Road, Newmarket, Suffolk, CB8 0AX, England
Tel: +44 (0)1638 665161 Fax: +44 (0)1638 660718 email: sales@blpcomp.com <http://www.blpcomp.com>

A subsidiary of Dialight plc