

S13 RELAY SHORI

◆ Features

- Wide switching capacity of 10 μ A to 2A
- Sensitivity coil:0.22W
- High dielectric strength coil-contacts: 1000VAC, open contacts:750VAC.
- Conforms to FCC part 68 requirements.
- DPDT configuration.
- High reliability bifurcated Contact.



◆ Coil Data [at 20°C]

- Standard Type

Rated voltage (V)	Coil Resistance $\pm 10\%$ (Ω)	Rated Current $\pm 10\%$ (mA)	Pick up Voltage (Max)	Drop out Voltage (Min)	Max continuous Voltage	Power consumption At rated Voltage
3	45	66.7	75% of rated voltage	5% of rated voltage	120% of Rated voltage	Approx.0.2W
5	125	40				
6	180	33.3				
9	405	22.2				
12	720	16.7				
24	2890	8.3				
48	7680	6.3			110% of Rated voltage	Approx.0.3W

- High sensitivity Type

Rated voltage (V)	Coil Resistance $\pm 10\%$ (Ω)	Rated Current $\pm 10\%$ (mA)	Pick up Voltage (Max)	Drop out Voltage (Min)	Max continuous Voltage	Power consumption At rated Voltage
3	60	50	75% of rated voltage	5% of rated voltage	180% of Rated voltage	Approx.0.15W
5	166.7	30				
6	240	25				
9	540	16.7				
12	960	12.5				
24	3200	7.5				
48	7680	6.25			180% of Rated voltage	Approx.0.18W Approx.0.3W

S13 RELAY SHORI

◆ Contact Rating

Number of contacts and type	2 changeover contacts	
Contact assembly	Bifurcated crossbar	
Max .continuous current	2A	
Maximum switching current	2A / standard type	
	1A / high sensitivity	
Maximum switching voltage	125VAC 125VDC	
Maximum switching capacity	DC voltage	60W / standard type
	AC voltage	24W / high sensitivity & Ultra sensitivity type
		62.5VA
Min. permissible load	0.01mA at 10mVDC	

◆ Type List

Terminal style	Contact form	Coil sensitivity	Enclosure style
			Plastic sealed
PCB terminal	2C(DPDT)	Standard	S13-12
	2C(DPDT)	High sensitivity	S13-12B

◆ Ordering information

S13 - 12 B
1 2 3

1. S13 -- Basic series designation
3. Blank -- Standard Type
- B -- High sensitivity Type

2. 12 -- Coil Voltage (3V-48V)

S13 RELAY *SHORI*


◆ Contact Rating

Contact material	Ag Alloy	
Contact resistance	100 mΩ Max	
Operate time	7 ms Max	
Release time	3 ms Max	
Insulation resistance	100 mΩ Min. (DC 500V)	
Dielectric strength	Between open contact	: AC 1000V ,50/60Hz 1 min.
	Between contact of different poles	: AC 1000V, 50/60Hz 1 min.
	Between contact of same poles	: AC 750V ,50/60Hz 1 min. : AC 750V ,50/60Hz 1 min. for Ultra-sensitivity type
Vibration resistance	Operating extremes	10~50Hz, amplitude 1.5 mm
	Damage limits	10~50Hz, amplitude 1.5 mm
Shock resistance	Operating extremes	20G
	Damage limits	100G
Life expectancy	Mechanical	15,000,000 operations (frequency 36,000 operations/hr)
	Electrical	AC100,000 operations/DC300,000 operations (frequency 1,800 operations/hr)
Operating ambient temperature	-25~+70°C	
Weight	Approx. 6 g	

◆ Safety Approval

Certified	UL/CUL
File No.	E188091


◆ Outline Dimension

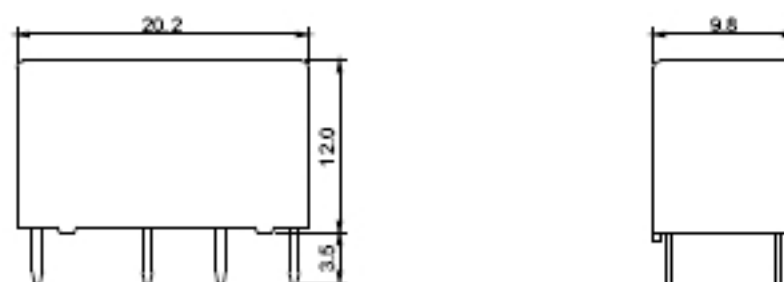

S13 RELAY *SHORI*


◆ Wiring Diagram

BOTTOM VIEW

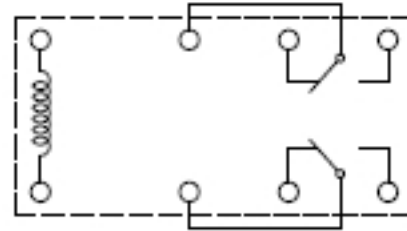

◆ PC BOARD LAYOUT

BOTTOM VIEW

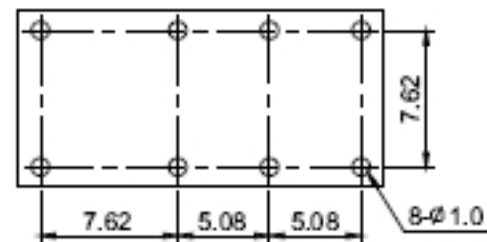

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [General Purpose Relays](#) category:

Click to view products by [Shori](#) manufacturer:

Other Similar products are found below :

[APF30318](#) [JVN1AF-4.5V-F](#) [PCN-105D3MHZ](#) [5JO-10000S-SIL](#) [5JO-1000CD-SIL](#) [5JO-400CD-SIL](#) [LY2S-AC220/240](#) [LYQ20DC12](#)
[6031007G](#) [6131406HQ](#) [6-1393099-3](#) [6-1393099-8](#) [6-1393122-4](#) [6-1393123-2](#) [6-1393767-1](#) [6-1393843-7](#) [6-1415012-1](#) [6-1419102-2](#) [6-](#)
[1423698-4](#) [6-1608051-6](#) [6-1608067-0](#) [6-1616170-6](#) [6-1616248-2](#) [6-1616282-3](#) [6-1616348-2](#) [6-1616350-1](#) [6-1616350-8](#) [6-1616358-7](#) [6-](#)
[1616359-9](#) [6-1616360-9](#) [6-1616931-6](#) [6-1617039-1](#) [6-1617052-1](#) [6-1617090-2](#) [6-1617090-5](#) [6-1617347-5](#) [6-1617353-3](#) [6-1617801-8](#) [6-](#)
[1617802-2](#) [6-1618107-9](#) [6-1618248-4](#) [M83536/1-027M](#) [CX-4014](#) [MAHC-5494](#) [MAVCD-5419-6](#) [703XCX-120A](#) [7-1393100-5](#) [7-1393111-7](#)
[7-1393144-5](#) [7-1393767-8](#)