


datasheet for LAS S G article number: 934097100





product description:	order number: 934 097-100
description:	Safety straight connector with screw connection for
	leads from 0.5mm² to 1.5mm², outer diameter of lead
	max. 4.2mm. Plug 4mm with caged spring, 1000
	V-system, IEC 61010. Simple assembly by
	Click-System.
typ:	LAS S G schwarz/black
system:	4mm safety system
order number:	934 097-100
color	•
other color versions:	
technical data	
measurement category	CAT III
acc. to IEC 61010:	
pin dimensions	4 mm
type of contact:	pin (spring loaded)
type of termination:	screw
rated voltage:	AC/DC 1000 V
rated current:	24 A
Please consider derating curve!	24 A
contact resistance:	10 mOhm
material	
contact material:	contact pin: brass
	contact spring: copper - beryllium
contact surface material:	nickel
housing material:	PA
environmental conditions:	
temperature range:	-15 °C to +70 °C
inflammable class:	
housing (basic material):	UL 94 V - 2
drawing	

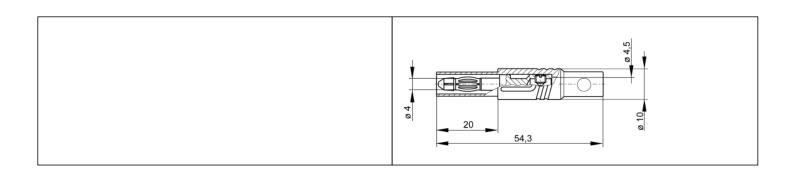

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Test Plugs & Test Jacks category:

Click to view products by Hirschmann manufacturer:

Other Similar products are found below:

579-0400 66000-7 R644543000 R921923000 R921930000 R941344000 R948161000 R999351000 1408-4 1533-1 174-R825B-EX

NYS508-BU NYS508-O 1680 174-R819B-EX R644543003 R644543020 R644543021 R921926000 R921931000 R921932000

R921934000 R929991000 R941460000 R941461000 R941463600 R941920600 R948160000 31B-2-RED 032-0016-023 105-1106-001

108-1000-106 108-2301-621 111-0707-001 66001-9 7013 1395080-1 930166100 NYS508-GR NYS508-V NYS508-W NYS508-Y

NYS511-R BP30-2BR10-B PKG BP30-10-WT BP30-2BR-B PKG BP30Y-1 PKG R941049000 R941340000 R948141029