

S2M RELAY

SHORI

◆ Features

- Very small size with light weight.
- Various coil sensitivity types are available.
- Plastic sealed and flow solder types are available.
- Wide operation coil voltage range.



◆ Coil Data [at 20°C]

➤ Standard Type

Rated voltage (V)	Coil Resistance ±10% (Ω)	Rated Current ±10% (mA)	Pick up Voltage (Max)	Drop out Voltage (Min)	Max continuous Voltage	Power consumption At rated Voltage
3	25	120	75% of rated voltage	5% of rated voltage	130% Max of Rated voltage	Approx.0.36W
5	70	72				
6	100	60				
9	225	40				
12	400	30				
24	1600	15				

➤ High sensitivity Type

Rated voltage (V)	Coil Resistance ±10% (Ω)	Rated Current ±10% (mA)	Pick up Voltage (Max)	Drop out Voltage (Min)	Max continuous Voltage	Power consumption At rated Voltage
3	45	66.7	75% of rated voltage	5% of rated voltage	130% Max of Rated voltage	Approx.0.2W
5	125	40				
6	180	33.3				
9	400	22.5				
12	700	17				
24	2800	8.6				

➤ Ultra-sensitivity Type

Rated voltage (V)	Coil Resistance ±10% (Ω)	Rated Current ±10% (mA)	Pick up Voltage (Max)	Drop out Voltage (Min)	Max continuous Voltage	Power consumption At rated Voltage
3	60	50	75% of rated voltage	5% of rated voltage	130% Max of Rated voltage	Approx.0.15W
5	167	30				
6	240	25				
9	540	16.7				
12	960	12.5				
24	3840	6.2				

◆ Contact Rating

Resistive load	1A/120VAC, 2A/24VDC
----------------	---------------------

◆ Type List

Terminal style	Contact form	Type	Designation(provided with)	
			Sealed type	Sealed type washable
PCB terminal	1C(SPDT)	Standard	S2M-12	S2M-12-S
	1C(SPDT)	High sensitivity	S2M-12B	S2M-12B-S

◆ Ordering information

S2M - 12 B - S
1 2 3 4

1. S2M -- Basic series designation

3. B -- High sensitivity Type

Blank: Standard Type

2. 12 -- Coil Voltage (3V~24V)

4. S -- Sealed type washable

Blank -- Sealed type


◆ Specification

Contact material	Ag Alloy	
Contact resistance	100 mΩ Max	
Operate time	4 ms Max	
Release time	3 ms Max	
Insulation resistance	100 MΩ Min. (DC 500V)	
Dielectric strength	Between open contact : AC 400V ,50/60Hz 1 min.	
	Between contact and coil : AC 1000V, 50/60Hz 1 min.	
Vibration resistance	Operating extremes	10~50Hz, amplitude 1.5 mm
	Damage limits	10~50Hz, amplitude 1.5 mm
Shock resistance	Operating extremes	10G
	Damage limits	100G
Life expectancy	Mechanical	10,000,000 operations (frequency 18,000 operations/hr)
	Electrical	100,000 operations (frequency 1,800 operations/hr)
Operating ambient temperature	-30 ~ +70°C	
Weight	Approx 2.5 g	

S2M RELAY


SHORI

◆ Outline Dimension

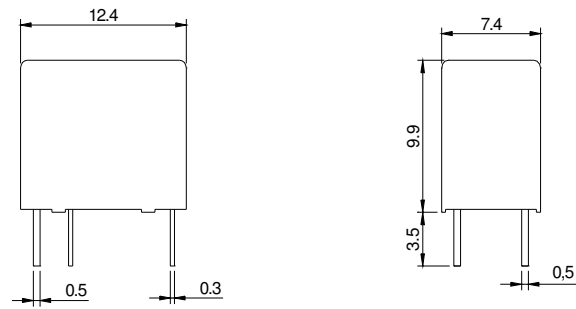


◆ Wiring Diagram

BOTTOM VIEW







◆ PC BOARD LAYOUT

BOTTOM VIEW

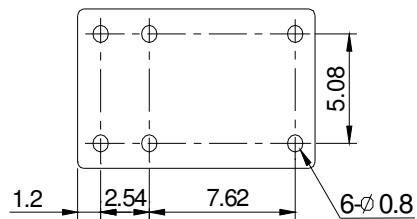

◆ Engineering Data

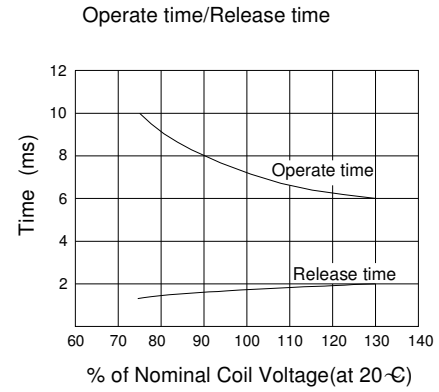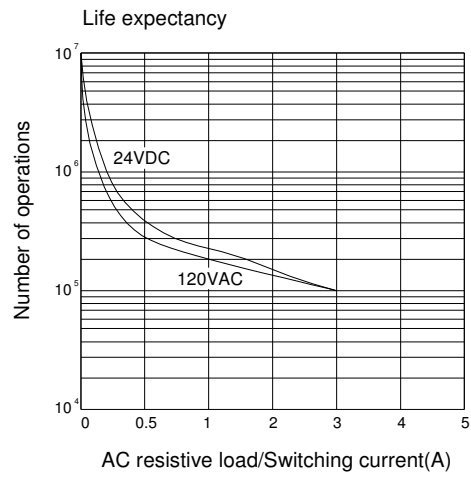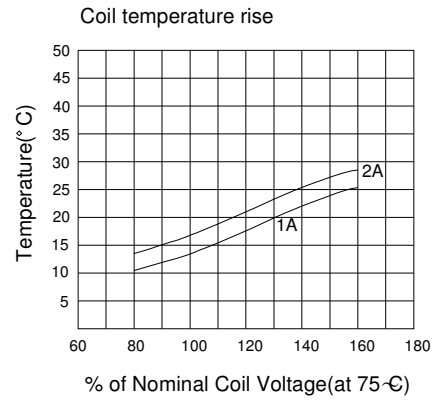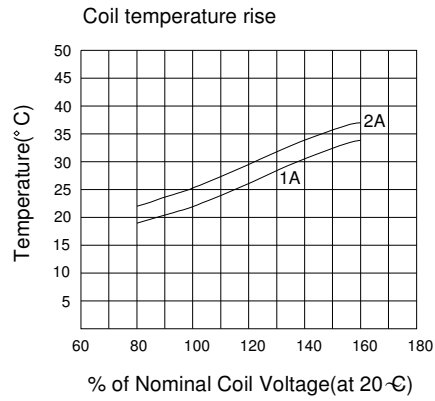

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [General Purpose Relays](#) category:

Click to view products by [Shori](#) manufacturer:

Other Similar products are found below :

[APF30318](#) [JVN1AF-4.5V-F](#) [PCN-105D3MHZ](#) [5JO-10000S-SIL](#) [5JO-1000CD-SIL](#) [5JO-400CD-SIL](#) [LY2S-AC220/240](#) [LYQ20DC12](#)
[6031007G](#) [6131406HQ](#) [6-1393099-3](#) [6-1393099-8](#) [6-1393122-4](#) [6-1393123-2](#) [6-1393767-1](#) [6-1393843-7](#) [6-1415012-1](#) [6-1419102-2](#) [6-](#)
[1423698-4](#) [6-1608051-6](#) [6-1608067-0](#) [6-1616170-6](#) [6-1616248-2](#) [6-1616282-3](#) [6-1616348-2](#) [6-1616350-1](#) [6-1616350-8](#) [6-1616358-7](#) [6-](#)
[1616359-9](#) [6-1616360-9](#) [6-1616931-6](#) [6-1617039-1](#) [6-1617052-1](#) [6-1617090-2](#) [6-1617090-5](#) [6-1617347-5](#) [6-1617353-3](#) [6-1617801-8](#) [6-](#)
[1617802-2](#) [6-1618107-9](#) [6-1618248-4](#) [M83536/1-027M](#) [CX-4014](#) [MAHC-5494](#) [MAVCD-5419-6](#) [703XCX-120A](#) [7-1393100-5](#) [7-1393111-7](#)
[7-1393144-5](#) [7-1393767-8](#)