

LED-Indicators



LED-INDICATORS – red section

We offer a complete range of high-quality bracket indicators. Diodes are carefully selected for constant colour and brightness, housings are solid brass and chromium-plated.

LED-Indicators

Ø 7 mm



Ø 7 mm



Ø 10,5 mm



Ø 9 mm
superbright



Ø 12,2 mm
waterproof



Ø 7 mm
tricoloured



Ø 9 mm
tricoloured



Ø 9 mm
flashing



Ø 12,2 mm
waterproof



with lead and
connector



LED-Indicators

Specifications:															
Models	P Power dissipation (mW)	V _F ¹ Forward voltage (V)	I _F Forward current (mA)	I _V Luminous intensity (mcd) at I _F = 10 mA	λ _P Peak emission wavelength (nm) ¹	V _R Reverse voltage (V)	I _R Reverse current (μA) at V _R = 3 V	T _{OP} Operating temperature (°C)							
LD 30 LD 32	85	min. 2,1 typ. 3,0 max.	20 25	1,8	700	5,0	100	- 40 + 85							
LD 34		min. 2,0 typ. 2,2 max.							20 40	20 ⁴	630	4,0	10	- 30 + 70	
LD 36 LDE 36 ³	100	min. 1,7 typ. 2,0 max.	20 50	20 30	660	4,0	100	- 30 + 85							
LD 40 LD 42		85							min. 2,1 typ. 3,0 max.	20 25	3,2	555	5,0	100	- 40 + 85
LD 44	110		min. 2,0 typ. 2,1 max.	25 45	8 ⁴	565	4,0	10	- 30 + 70						
LD 46 LDE 46 ³		125	min. 2,1 typ. 2,5 max.							20 50	8 12	555	4,0	100	- 30 + 85
LD 60 LD 62	85		min. 2,1 typ. 3,0 max.	20 25	2,7	600	5,0	100	- 40 + 85						
LD 64		110	min. 2,1 typ. 2,2 max.							35 50	10 ⁴	585	4,0	10	- 30 + 70
LD 66 LDE 66 ³	125		min. 2,2 typ. 2,5 max.	20 50	16 24	580	4,0	100	- 30 + 85						
LD 70 LD 72		62	min. 2,7 typ. 3,0 max. 3,3							20 50	0,9 ⁴	470	5,0	30	- 20 + 80
LD 53	70		min. 2,0 typ. 2,6 max.	10 30	0,5 1,0	632	3,0	10	- 25 + 85						
		green	min. 1,9 typ. 2,4 max.							20 30	0,25 0,5	558	3,0	10	- 25 - 25 + 85
		yellow	Combination red / green												
LD 56	45	min. 2,1 typ. 3,0 max.	10 20	2,2	700	5,0	100	- 40 + 85							
		green							min. 2,1 typ. 3,0 max.	10 25	3,9	555	5,0	100	- 40 + 85
		yellow							Combination red / green						
LD 96 flashing	200	min. typ. max.		0,5 ² 1,6 ²	660	0,4		- 40 + 70							

¹ with typical forward current
² at V_S = 5 V

³ Water proofing at 30 minutes at 1 m water column = IP 67.
⁴ at I_F = 20 mA


Models:

Light colour

Housing


Dimensions

LD 30	
LD 40	brass
LD 60	chromium-plated
LD 70	
LD 30 S	
LD 40 S	brass
LD 60 S	black, matt finish
LD 70 S	




Also available with integrated resistor for 24 V operation.
Additional to type number: – 24

LD 32	
LD 42	brass
LD 62	chromium-plated
LD 72	
LD 32 S	
LD 42 S	brass
LD 62 S	black, matt finish
LD 72 S	




Also available with integrated resistor for 24 V operation.
Additional to type number: – 24

LD 34	
LD 44	brass
LD 64	chromium-plated
LD 34 S	
LD 44 S	brass
LD 64 S	black, matt finish



LD 36	brass	superbright
LD 46	chromium-plated	
LD 66		
LD 36 S	brass	superbright
LD 46 S	black, matt finish	
LD 66 S		



Also available with integrated resistor for 24 V operation.
Additional to type number: – 24





LED-Indicators

Models:

Light colour Housing Dimensions

LD 53

brass
chromium-plated tricoloured




LD 53 S

brass
black, matt finish tricoloured

LD 56

brass
chromium-plated tricoloured

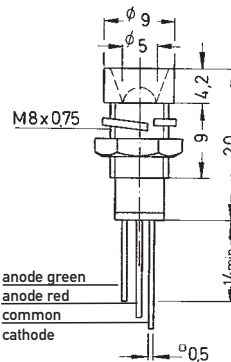

LD 56 S

brass
black, matt finish tricoloured

LD 96 R

brass
chromium-plated flashing

LD 96 G


LD 96 Y

LD 96 SR

brass
black, matt finish flashing

LD 96 SG

LD 96 SY

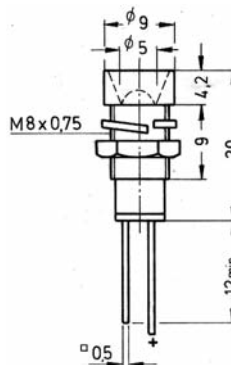

Flashing frequency = 3 Hz
Supply voltage = 4,75 V – 7 V

LDE 36

brass
chromium-plated waterproof

LDE 46


LDE 66

brass
black, matt finish waterproof

LDE 36 S

LDE 46 S

LDE 66 S

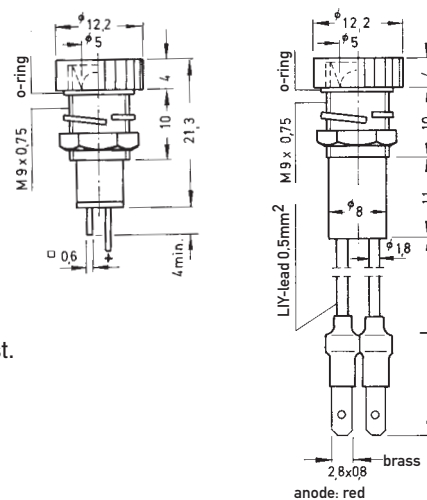

Special version: with lead and connector

Additional to type number: W

L = 50 mm; other length: minimum quantity and delivery time on request.

Also available with integrated resistor for 24 V operation.

Additional to type number: – 24

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [LED Displays & Accessories](#) category:

Click to view products by [Knitter-Switch](#) manufacturer:

Other Similar products are found below :

[LTC-2721WC](#) [LTC-4624JD](#) [LTC-4627G](#) [LTC-4627WC](#) [LTD-5021AWC](#) [LTM-8522G](#) [LTP-4323P](#) [LTP-747G](#) [LTS-3361JG-06](#)
[F416SYGWA/S530-E3](#) [EADST040RA2](#) [1668](#) [HT-F196NB-5323](#) [IPD2131-27](#) [SA03-12EWA](#) [LDD-E2802RD](#) [LDD-E306MI](#) [LDQ-N514RI](#)
[LDS-A3506RD](#) [LDS-A3926RI](#) [LDT-M516RI](#) [SC03-12HDB](#) [SI-B9T151550WW](#) [SI-B9V171550WW](#) [SLC-3PF-WL](#) [1624](#) [LTC-2621JD](#)
[LTC-2623WC](#) [LTC-4624P](#) [LTC-4627JD](#) [LTD-2601E](#) [LTD-322G](#) [LTD-482PC](#) [LTP-1457AKR](#) [LTP-3784G-01](#) [LTS-313AP](#) [LTS-4812SKR-](#)
[P](#) [LTS-547AE](#) [LTS-6780P](#) [446010401-3](#) [HV-7W30-6829](#) [CA12240_MINNIE-WWW-MTG-ASSY](#) [DA43-11GWA](#) [LDD-A516RI-17](#) [LDD-](#)
[E305RI](#) [LDQ-M513RI](#) [LDQ-M5204RI-SI](#) [LDQ-N3402RI](#) [LDQ-N3606RI](#) [LDT-M2804RI](#)