



ISSUE 1; January 2015 - RoHS 2011/65/EU


**Description**

- Oven controlled crystal oscillator on a FR4 base with a metal lid, available with or without voltage control.  
Please note: This document is intended to illustrate the general capability and versatility of IQD's design. For specific enquiries please contact one of IQD's Sales Offices where we can tailor a unique specification to meet your needs.



**Model Options:**


- IQOV-162-1 HCMOS output, no pulling
- IQOV-162-2 Sinewave output, no pulling
- IQOV-162-3 HCMOS output, ±3ppm to ±8ppm pulling
- IQOV-162-4 Sinewave output, ±3ppm to ±8ppm pulling

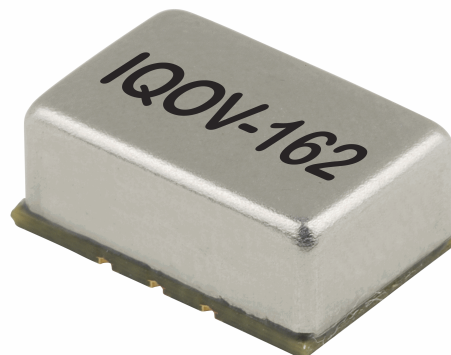

**Frequency Parameters**

- Frequency 10.0MHz to 100.0MHz
- Frequency Tolerance ±500.00ppb
- Tolerance Condition @ 25°C, 3.3V, VC=1.65V after 15mins warm-up
- Frequency Stability ±10.00ppb to ±100.00ppb
- Ageing ±5ppb max per day, ±500ppb max per year
- Frequency Tolerance (measurement referenced to frequency observed with TA=25°C, Vs=3.3V, VC=1.65V/NC and after 15 minutes of operation, within 30 days after ex-works): ±500ppb
- Frequency Stability: TA varied over temperature, measurement referenced to frequency observed with  $f_{ref} = (f_{max} + f_{min}) / 2$ , Vs=3.3V, VC=1.65V/NC, load=50Ω/15pF, temperature variable speed less than 2°C per minute.
- Ageing: Vs, VC, TA constant measurement referenced to frequency observed with TA=25°C, Vs= 3.3V, VC=1.65V/NC, load=50Ω/15pF and after 30 days of operation.
- Supply Voltage Variation (measurement referenced to frequency observed with TA=25°C, Vs varied from 3.13V to 3.47V, VC =1.65V/NC and load=50Ω/15pF): ±10ppb max
- Load Variation (5% load change measurement referenced to frequency observed with TA=25°C, Vs=3.3V, VC =1.65V/NC and load=50Ω/15pF): ±10ppb max
- Short Term Stability - Allan Variance (temperature stability, no EMI/EMC or other interference) test after power for 1hr ref. to 25°C; 1s, using PN9000 equipment): 0.1ppb max / 1sec
- Standard Frequencies: 10.0MHz, 12.80MHz, 19.20MHz, 20.0MHz, 25.0MHz 38.880MHz, 40.0MHz

**Outline (mm)**

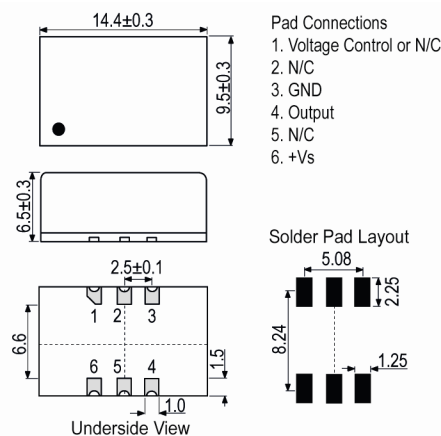

**Electrical Parameters**

- Supply Voltage 3.3V ±5%
- Current Draw:  
Warm up: 600mA max  
Steady state (@ 25°C): 300mA max
- Warm-Up Time (@ 25°C, F<±100ppb of final frequency): 5mins max

**Frequency Adjustment**

- Pulling ±3ppm to ±8ppm
- Control Voltage 1.65V ±1.65V
- Input Impedance 100kΩ min
- Linearity: ±10% max
- Slope: Positive

**Sales Office Contact Details:**

UK: +44 (0)1460 270200

France: +33 (0)5 34 50 91 18

Email: [info@iqdfrequencyproducts.com](mailto:info@iqdfrequencyproducts.com)

Germany: +49 (0) 30 408 192 300

USA: +1 408.273.4530

Web: [www.iqdfrequencyproducts.com](http://www.iqdfrequencyproducts.com)



**Operating Temperature Ranges**

- -20 to 70°C
- -30 to 75°C
- -40 to 85°C

**Output Details**

- Output Compatibility                    HCMOS/Sinewave
- Duty Cycle (HCMOS): 45/55%
- Rise/Fall Time (HCMOS): 8ns max
- Output Levels (HCMOS):  
  Low (@ Vs=3.3V, load=15pF): 0.4V max  
  High (@ Vs=3.3V, load=15pF): 2.4V min
- Output Levels (Sinewave):  
  6dBm min, 10dBm max

**Noise Parameters**

- Phase Noise (@ 10MHz typ):  
  -100dBc/Hz @ 10Hz  
  -130dBc/Hz @ 100Hz  
  -150dBc/Hz @ 1kHz  
  -150dBc/Hz @ 10kHz  
  -150dBc/Hz @ 100kHz  
  -155dBc/Hz @ 1MHz
- Phase Noise (@ 100MHz typ):  
  -85dBc/Hz @ 10Hz  
  -118dBc/Hz @ 100Hz  
  -140dBc/Hz @ 1kHz  
  -145dBc/Hz @ 10kHz  
  -145dBc/Hz @ 100kHz  
  -150dBc/Hz @ 1MHz
- Harmonic Suppression (Sinewave): -30dBc max  
  Spurious Suppression (Sinewave): -60dBc max

**Environmental Parameters**

- Operable Temperature Range: -40 to 85°C
- Storage Temperature Range: -55 to 105°C
- ESD Level:  
  HBM, Class 2: 2000V to 4000V, JEDEC JS-001-2010  
  Machine Model, Class B: 200V to 400V, JEDEC JS-001-2010
- Shock: IEC 60068-2-27, Test Ea, Severity 50A: 50G, 11ms duration, 1/2 sine wave, 3 times in each of 3 mutually perpendicular planes
- Vibration: IEC 60068-2-06, Test Fc: 10Hz-500Hz, 0.75mm displacement, 10G acceleration, one cycle per 30mins, 3 times in each of 3 mutually perpendicular planes, test 2hrs

**Manufacturing Details**

- Moisture Sensitivity Level: 2
- Maximum Reflow Temperature: 260°C (30secs max)

**Ordering Information**

- Frequency\*
- Model Option\*
- Output Type\*
- Frequency Stability (over operating temperature range)\*
- Operating Temperature Range\*
- Supply Voltage
- Pulling\*
- (\*minimum required)
- Example  
  10.0MHz IQOV-162-3  
  HCMOS ±20ppb -40 to 85C 3.3V ±3ppm to ±8ppm

**Sales Office Contact Details:**

UK: +44 (0)1460 270200

France: +33 (0)5 34 50 91 18

Email: [info@iqdfrequencyproducts.com](mailto:info@iqdfrequencyproducts.com)

Germany: +49 (0) 30 408 192 300

USA: +1 408.273.4530

Web: [www.iqdfrequencyproducts.com](http://www.iqdfrequencyproducts.com)



**Compliance**

- RoHS Status                               Compliant
- REACH Status                             Compliant
- MSL Rating (JDEC-STD-033):        2

**Packaging Details**

- Pack Style: Reel       Tape & reel in accordance with EIA-481-D  
   Pack Size: 500
- Pack Style: Bulk       Loose in bulk pack  
   Pack Size: 1

**Electrical Specification - maximum limiting values 3.3V ±5%**

Frequency Min	Frequency Max	Temperature Range	Stability (Min)	Current Draw	Rise and Fall Time	Duty Cycle
		°C	ppb	mA	ns	%
10.0MHz	100.0MHz	-20 to 70	±10.0	-	-	-
		-30 to 75	±10.0	-	-	-
		-40 to 85	±10.0	-	-	-

*This document was correct at the time of printing; please contact your local sales office for the latest version.*  
[Click to view latest version on our website.](#)

**Sales Office Contact Details:**

UK: +44 (0)1460 270200

France: +33 (0)5 34 50 91 18

Email: [info@iqdfrequencyproducts.com](mailto:info@iqdfrequencyproducts.com)

Germany: +49 (0) 30 408 192 300

USA: +1 408.273.4530

Web: [www.iqdfrequencyproducts.com](http://www.iqdfrequencyproducts.com)

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Standard Clock Oscillators](#) category:*

*Click to view products by [IQD](#) manufacturer:*

Other Similar products are found below :

[EP1400SJTSC-125.000M](#) [601137](#) [601252](#) [CSX750FBC-24.000M-UT](#) [CSX750FBC-33.333M-UT](#) [CSX750FCC-3.6864M-UT](#) [F335-12](#) [F335-25](#) [F535L-50](#) [DSC506-03FM2](#) [ASA-20.000MHZ-L-T](#) [ASA-25.000MHZ-L-T](#) [ASA-27.000MHZ-L-T](#) [ASV-20.000MHZ-LR-T](#) [ECS-2018-160-BN-TR](#) [EL13C7-H2F-125.00M](#) [MXO45HS-2C-66.6666MHZ](#) [NBXDBB017LN1TAG](#) [NBXHBA019LN1TAG](#) [SiT1602BI-22-33E-50.000000E](#) [SIT8003AC-11-33S-2.04800X](#) [SiT8256AC-23-33E-156.250000X](#) [SIT8918AA-11-33S-50.000000G](#) [SM4420TEV-40.0M-T1K](#) [SMA4306-TL-H](#) [F335-24](#) [F335-40](#) [F335-50](#) [F535L-10](#) [F535L-12](#) [F535L-16](#) [F535L-24](#) [F535L-27](#) [F535L-48](#) [PE7744DW-100.0M](#) [CSX750FBC-20.000M-UT](#) [CSX-750FBC33333000T](#) [CSX750FBC-4.000M-UT](#) [CSX750FBC-7.3728M-UT](#) [CSX750FBC-8.000M-UT](#) [CSX-750FCC14745600T](#) [CSX750FCC-16.000M-UT](#) [CSX-750FCC40000000T](#) [CSX750FCC-4.000M-UT](#) [ASA-22.000MHZ-L-T](#) [ASA2-26.000MHZ-L-T](#) [ASA-40.000MHZ-L-T](#) [ASA-48.000MHZ-L-T](#) [ASA-60.000MHZ-L-T](#) [ASF1-3.686MHZ-N-K-S](#)