



ISSUE 11; February 2012 - RoHS 2011/65/EU

Description

- Industry standard package
- Suitable for real time clock applications
- Plastic encapsulated

Frequency Range

- Frequency 32.768kHz
- Frequency Tolerance ± 20 ppm

General Specification

- Load Capacitance (CL) 12.5pF Standard
- Drive Level 1.0 μ W max
- Ageing ± 5 ppm max per year @ 25°C
- Shunt Capacitance (C0) 1pF typ

Operable Temperature Range

- 40 to 85°C

Environmental Parameters

- Operable Temperature Range: -40 to 85°C
- Storage Temperature Range: -55 to 125°C
- Drop: 75cm drop (3 times) onto hard wooden board
- Vibration: 1.5mm amplitude, 10Hz-60Hz, 2-3mins in 3 mutually perpendicular planes, duration 2hrs each plane

Ordering Information (*minimum required)

- Frequency*
- Model*
- Tolerance @25°C
- Load Capacitance*


Example
 32.768kHz 91SMX
 20/-/12.5

Packing Details

- Pack Style: **Bulk** Loose in bulk pack
Pack Size 100
- Pack Style: **Reel** Tape and reel in accordance with EIA-481-D
Pack Size 2,000
- Alternative packing options available



Outline (mm)

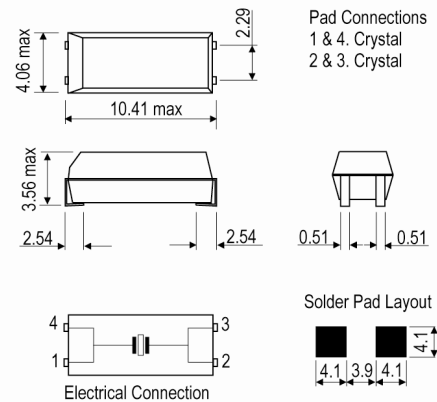

Sales Office Contact Details:


UK: +44 (0)1460 270200
 Germany: +49 (0)7264 9145-0

France: +33 (0)5 34 50 91 18
 USA: +1 (0) 408 455 2426

Email: info@iqdfrequencyproducts.com
 Web: www.iqdfrequencyproducts.com



Typical Frequency Stability Characteristics

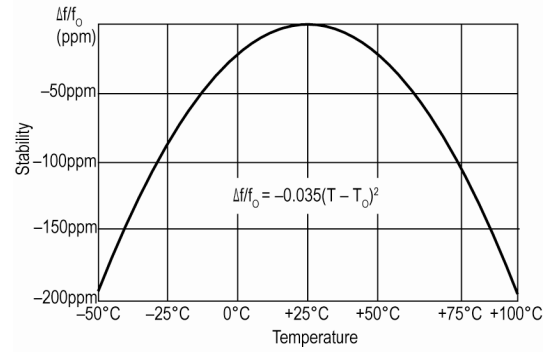

Electrical Specification - maximum limiting values

Frequency Range	Frequency Tolerance	Typical Frequency Stability Coefficient	Temperature Range	ESR Max	Vibration Mode
32.768kHz	±20ppm	-0.035ppm/°C ²	-40 to 85°C	50kΩ	Tuning Fork

This document was correct at the time of printing; please contact your local sales office for the latest version

Sales Office Contact Details:

UK: +44 (0)1460 270200
Germany: +49 (0)7264 9145-0

France: +33 (0)5 34 50 91 18
USA: +1 (0) 408 455 2426

Email: info@iqdfrequencyproducts.com
Web: www.iqdfrequencyproducts.com

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Crystals](#) category:

Click to view products by [IQD](#) manufacturer:

Other Similar products are found below :

[CS325S24000000ABJT](#) [718-13.2-1](#) [MC405 32.0000K-R3:PURE SN](#) [FC-135R 32.7680KF-A3](#) [7A-40.000MAAE-T](#) [7B-27.000MBBK-T](#)
[FL2000085](#) [9B-15.360MBBK-B](#) [9C-7.680MBBK-T](#) [ASH7K-32.768KHZ](#) [AT-41.600MAGQ-T](#) [BTD1062E05A-513](#) [LFXTAL066198Cutt](#)
[9C-14.31818MBBK-T](#) [FA-238 50.0000MB30X-K3](#) [FC-12M 32.7680KA-AC3](#) [SSPT7F-9PF20-R](#) [FX325BS-38.88EEM1201](#)
[LFXTAL065253Cutt](#) [LFXTAL066431Cutt](#) [XT9S20ANA14M7456](#) [XT9SNLANA16M](#) [646G-24-2](#) [7A-24.576MBBK-T](#) [7B-30.000MBBK-T](#)
[WX26-32.768K-6PF](#) [9B-14.31818MBBK-B](#) [CD1AM](#) [7B-25.000MAAE-T](#) [7A-14.31818MBBK-T](#) [6504-202-1501](#) [6526-202-1501](#) [FA-118T](#)
[27.1200MB50P-K0](#) [FC-135R 32.7680KA-A3](#) [ABM12-104-37.400MHZT](#) [ABLS-10.000MHZ-D3W-T](#) [BTJ112E01E-513](#) [BTJ722K01C-7067](#)
[BTL-20-513](#) [TSX-3225 24.0000MF15X-AC](#) [TSX-3225 16.0000MF18X-AC](#) [BTJ120E02C](#) [BTL-12-513](#) [7A-10.000MBBK-T](#) [7A-](#)
[11.0592MBBK-T](#) [ABM12-103-24.000MHZT](#) [CS325S25000000ABJT](#) [ABM3B-25.000MHZ-B2-X-T](#) [FC-135 32.7680KA-A5](#) [FX0800015](#)