

SL-120-G-10

(2,54 mm) .100"

SL, SDL SERIES

LOW PROFILE MACHINED SOCKET STRIPS

FEATURES

- Achieve low profile without sacrificing insertion depth!
- Choice of four precision screw machined lead styles.
- Exceptionally low profile, down to (2,11 mm) .083" off of board.
- Mates with BBL or BDL for board stacking spaces down to (3,89 mm) .153"

SPECIFICATIONS

For complete specifications see www.samtec.com?SL or www.samtec.com?SDL

Insulator Material: Black Glass Filled Polyester
Contact/Shell Materials: BeCu/Brass

Plating: Au or Sn over

50µ" (1,27 µm) Ni

Operating Temp Range: -55°C to +125°C with Gold

-55°C to +105°C with Tin

Contact Resistance: 10 mΩ

Insertion Force: (Single contact only)

Standard =

9 oz (2,50 N) avg.,

16 oz (4,45 N) max

((0,43 mm) .017" DIA probe)

Low Insertion Force =

2.5 oz (0,70 N) avg.,

5.5 oz (1,53 N) max

((0,43 mm) .017" DIA probe)

Withdrawal Force: (Single contact only)

Standard =

2.5 oz (0,70 N) avg.,

1.5 oz (0,42 N) min

((0,43 mm) .017" DIA probe)

Low Insertion Force =

2.0 oz (0,56 N) avg.,

0.5 oz (0,14 N) min

((0,43 mm) .017" DIA probe)

RoHS Compliant: Yes

Lead-Free Solderable:

Wave only

RECOGNITIONS

For complete scope of recognitions see www.samtec.com/quality



Note: Some lengths, styles and options are non-standard, non-returnable.

Mates with: TS, TD, HTS, BBS, BBD, BBL, BDL, BHS

TYPE STRIP

1


NO. PINS PER ROW

PLATING OPTION


LEAD STYLE

SL
= Single Row Low Profile Socket Strip

SDL
= Double Row Low Profile Socket Strip

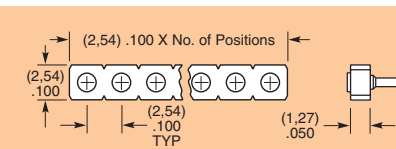

01 thru 32

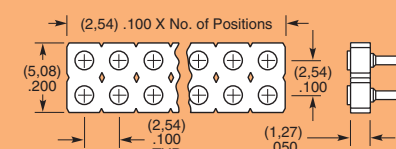

01 thru 36

-G
= 30µ" (0,76 µm) Gold contact, 10µ" (0,25µm) Gold shell

-T
= 30µ" (0,76 µm) Gold contact, Tin shell

-TT
= Tin contact and shell (LIF not available)


Low Insertion Force (LIF) Available

-10
Low Profile (Hollow Leg)


-11
Low Profile (Standard Mount)
For LIF specify -31

-12
Micro-Socket (Hollow Leg)


-19
Micro-Socket (Hollow Leg)
For LIF specify -39




Contact Length = (2,11 mm) .083"
 Lead DIA Accepted = (0,38 mm) .015" to (0,51 mm) .020"
 Insertion Depth = (2,67 mm) .105" to (4,32 mm) .170"
 Style 10 Component Part No. = SC-3P1



Contact Length = (1,58 mm) .062"
 Lead DIA Accepted = (0,41 mm) .016" to (0,53 mm) .021"
 Insertion Depth = (2,03 mm) .080" to (2,67 mm) .105"
 Style 11 Component Part No. = SC-4P1
 Style 31 Component Part No. = EZ-4P1



Contact Length = (1,58 mm) .062"
 Lead DIA Accepted = (0,41 mm) .016" to (0,51 mm) .020"
 Insertion Depth = (1,65 mm) .065" to (3,81 mm) .150"
 Style 12 Component Part No. = SC-5P1

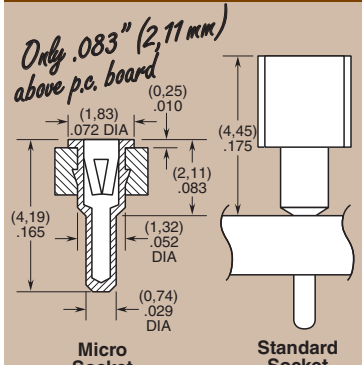

Micro Socket

Standard Socket

(Reference only. Not available with SL & SDL)

Contact Length = (1,58 mm) .062"
 Lead DIA Accepted = (0,41 mm) .016" to (0,51 mm) .020"
 Insertion Depth = (1,65 mm) .065" to (3,56 mm) .140"
 Style 19 Component Part No. = SC-8P1
 Style 39 Component Part No. = EZ-8P1

Due to technical progress, all designs, specifications and components are subject to change without notice.

WWW.SAMTEC.COM

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Headers & Wire Housings](#) category:

Click to view products by [Samtec](#) manufacturer:

Other Similar products are found below :

[95000-104TRLF](#) [10135584-644402LF](#) [DF62W-EP2022PCA](#) [95000-106TRLF](#) [DF62W-2022SCA](#) [DF62W-EP2022PC](#) [2203348](#) [DF62W-2022SC](#) [1084018](#) [1029039](#) [1084017](#) [802-10-012-10-002000](#) [1112640](#) [1112639](#) [891-007-9SS-BST1T](#) [000-34000](#) [0008550134](#) [0009482033](#) [0009507031](#) [57102-F02-18ULF](#) [57102-S06-03LF](#) [57202-S52-04LF](#) [PCN6-15S-2.5E](#) [0039019024](#) [58102-G61-06LF](#) [582553-1](#) [0009485154](#) [0009508121](#) [0022285053](#) [0050291907](#) [018731A](#) [LY20-4P-DT1-P1E-BR](#) [02.125.8002.8](#) [60101931](#) [60598-1 \(Cut Strip\)](#) [M1625-3R/100](#) [61062-3](#) [61082-181009](#) [CSU011177004](#) [636-1427](#) [638009-1](#) [641938-9](#) [641991-4](#) [644168-1](#) [644827-2](#) [647662-1](#) [65039-019ELF](#) [65692-001LF](#) [65781-018](#) [65781-047](#)