

SL, SDL SERIES

(2,54 mm) .100"

LOW PROFILE MACHINED SOCKET STRIPS

FEATURES

- Achieve low profile without sacrificing insertion depth!
- Choice of four precision screw machined lead styles.
- Exceptionally low profile, down to (2,11 mm) .083" off of board.
- Mates with BBL or BDL for board stacking spaces down to (3,89 mm) .153"

SPECIFICATIONS

For complete specifications see www.samtec.com?SL or www.samtec.com?SDL

Insulator Material: Black Glass Filled Polyester
Contact/Shell Materials: BeCu/Brass

Plating: Au or Sn over 50µ" (1,27 µm) Ni
Operating Temp Range: -55°C to +125°C with Gold
 -55°C to +105°C with Tin
Contact Resistance: 10 mΩ

Insertion Force: (Single contact only)
 Standard = 9 oz (2,50 N) avg., 16 oz (4,45 N) max ((0,43 mm) .017" DIA probe)
 Low Insertion Force = 2.5 oz (0,70 N) avg., 5.5 oz (1,53 N) max ((0,43 mm) .017" DIA probe)

Withdrawal Force: (Single contact only)
 Standard = 2.5 oz (0,70 N) avg., 1.5 oz (0,42 N) min ((0,43 mm) .017" DIA probe)
 Low Insertion Force = 2.0 oz (0,56 N) avg., 0.5 oz (0,14 N) min ((0,43 mm) .017" DIA probe)

RoHS Compliant: Yes
Lead-Free Solderable: Wave only


RECOGNITIONS

For complete scope of recognitions see www.samtec.com/quality



Note: Some lengths, styles and options are non-standard, non-returnable.

Mates with: TS, TD, HTS, BBS, BBD, BBL, BDL, BHS

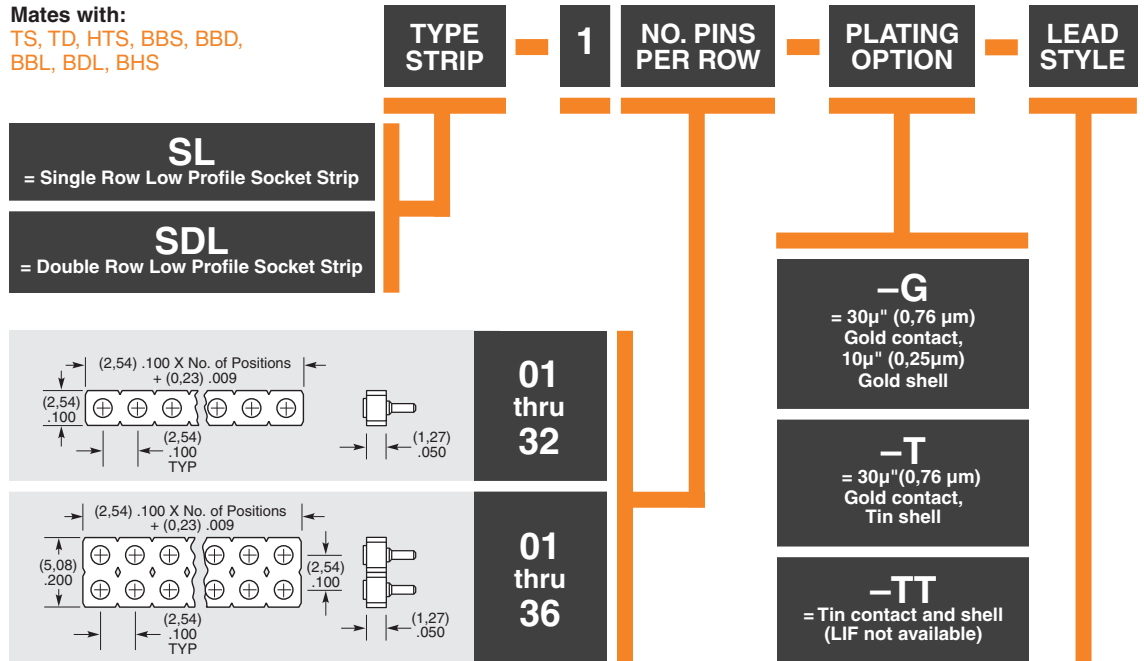

Low Insertion Force (LIF) Available

| -10 Low Profile (Hollow Leg) | -11 Low Profile (Standard Mount) For LIF specify -31 | -12 Micro-Socket (Hollow Leg) | -19 Micro-Socket (Hollow Leg) For LIF specify -39 |
|---|---|---|--|
| <p>Dimensions: (1,83) .072 DIA, (3,10) .122, (0,76) .030, (5,84) .230, (1,32) .052 DIA, (0,76) .030 DIA</p> <p>Contact Length = (2,11 mm) .083" Lead DIA Accepted = (0,38 mm) .015" to (0,51 mm) .020" Insertion Depth = (2,67 mm) .105" to (4,32 mm) .170" Style 10 Component Part No. = SC-3P1</p> | <p>Dimensions: (1,83) .072 DIA, (0,51) .020, (3,35) .132, (6,10) .240, (1,32) .052 DIA, (0,51) .020 DIA</p> <p>Contact Length = (1,58 mm) .062" Lead DIA Accepted = (0,41 mm) .016" to (0,53 mm) .021" Insertion Depth = (2,03 mm) .080" to (2,67 mm) .105" Style 11 Component Part No. = SC-4P1 Style 31 Component Part No. = EZ-4P1</p> | <p>Dimensions: (1,83) .072 DIA, (2,41) .095, (0,51) .020, (4,83) .190, (1,32) .052 DIA, (0,76) .030 DIA</p> <p>Contact Length = (1,58 mm) .062" Lead DIA Accepted = (0,41 mm) .016" to (0,51 mm) .020" Insertion Depth = (1,65 mm) .065" to (3,81 mm) .150" Style 12 Component Part No. = SC-5P1</p> | <p>Dimensions: (1,83) .072 DIA, (0,25) .010, (2,11) .083, (4,19) .165, (1,32) .052 DIA, (0,74) .029 DIA, (4,45) .175</p> <p><i>Only .083" (2,11 mm) above p.c. board</i></p> <p>Contact Length = (1,58 mm) .062" Lead DIA Accepted = (0,41 mm) .016" to (0,51 mm) .020" Insertion Depth = (1,65 mm) .065" to (3,56 mm) .140" Style 19 Component Part No. = SC-8P1 Style 39 Component Part No. = EZ-8P1</p> <p>Micro Socket Standard Socket (Reference only. Not available with SL & SDL)</p> |

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Headers & Wire Housings](#) category:

Click to view products by [Samtec](#) manufacturer:

Other Similar products are found below :

[95000-104TRLF](#) [10135584-644402LF](#) [DF62W-EP2022PCA](#) [95000-106TRLF](#) [DF62W-2022SCA](#) [DF62W-EP2022PC](#) [2203348](#) [DF62W-2022SC](#) [1084018](#) [1029039](#) [1084017](#) [802-10-012-10-002000](#) [1112640](#) [1112639](#) [000-34000](#) [0009482033](#) [0009507031](#) [57102-S06-03LF](#) [57202-S52-04LF](#) [PCN6-15S-2.5E](#) [0039019024](#) [58102-G61-06LF](#) [582553-1](#) [0009485154](#) [0009508121](#) [0022285053](#) [0050291907](#) [018731A](#) [LY20-4P-DT1-P1E-BR](#) [02.125.8002.8](#) [60101931](#) [60598-1 \(Cut Strip\)](#) [M1625-3R/100](#) [61062-3](#) [61082-181009](#) [636-1427](#) [638009-1](#) [641938-9](#) [641991-4](#) [644168-1](#) [647662-1](#) [65039-019ELF](#) [65817-002LF](#) [65817-015LF](#) [65863-015LF](#) [66207-023LF](#) [67016-026LF](#) [67046-001LF](#) [67095-007LF](#) [67230-005LF](#)