




SFM-110-02-L-D-A


SFML-125-T2-L-D-LC



SFM-125-02-L-SH



SFML-115-T2-L-D-LC



(1.27 mm) .050"

SMT & THROUGH-HOLE TIGER EYE™ SOCKET

SPECIFICATIONS

For complete specifications and recommended PCB layouts see www.samtec.com?SFM or www.samtec.com?SFML

Insulator Material:
Black Liquid Crystal Polymer
Plating:
Au or Sn over 50µ" (1.27 µm) Ni

Current Rating (SFM/TFM):
3.2 A per pin
(1 pin powered per row)

Voltage Rating:
250 VAC mated with TFM
Operating Temp Range:
-55°C to +125°C

Contact Resistance:
15 mΩ

Insertion Depth:
(3.05 mm) .120" to
(4.06 mm) .160"

Wiping Distance:
(0.38 mm) .015"

Normal Force:
Standard= 132 g (1.29 N) avg.;
LIF= 90 g (0.88 N) avg.

Insertion Force (SFM):
(Single contact only)
Standard= 2.5 oz (0.69 N) avg.;

LITE= 2.0 oz (0.56 N) avg.;

LIF= 1.4 oz (0.39 N) avg.

Withdrawal Force (SFM):
(Single contact only)
Standard= 2.0 oz (0.56 N) avg.;

LITE= 1.5 oz (0.42 N) avg.;

LIF= 1.0 oz (0.28 N) avg.

Max Cycles:
10,000 with 30µ" (0.76 µm) Au
(Call Samtec for E.L.P.™
plating option)

RoHS Compliant:
Yes

Processing:
Lead-Free Solderable:
Yes

SMT Lead Coplanarity:
(0.10 mm) .004" max (05-25)
(0.15 mm) .006" max (30-50)

SFM Mates with:
TFM, TFSD, TFSS

SFML Mates with:
TFML



Low insertion force
Tiger Eye™ contacts available

(1.27 mm x 1.27 mm)
.050" x .050" micro pitch

Locking feature
increases unmating
force (SFML)







10 year Mixed Flowing Gas with 30µ" Gold
Call Samtec for maximum mated cycles

RUGGEDIZED
BY SAMTEC

- Passes 10 Year MFG
- Locking option
- Locking clip option
- Screw Down option

Choice of SMT or
through-hole tails

TYPE STRIP	NO. PINS PER ROW	LEAD STYLE
1	03, 04, 06, 08 (SFM only)	(Surface Mount)
SFM = Standard	05, 07, 10, 15, 20, 25, 30, 35, 40, 45, 50 (Standard sizes)	(Through-hole)
SFML = Locking		-02 = Tiger Eye™ Contact (BeCu)
		-L2 = Low Insertion Force Tiger Eye™ Contact (BeCu)
		-T2 = Tiger Eye™ LITE Contact (Phosphor Bronze)
		-01, -03 = Tiger Eye™ Contact (BeCu)
		-L1, -L3 = Low Insertion Force Tiger Eye™ Contact (BeCu)
		-T1 = Tiger Eye™ LITE Contact (Phosphor Bronze)

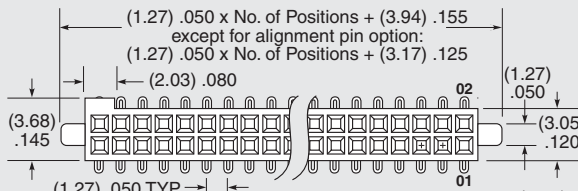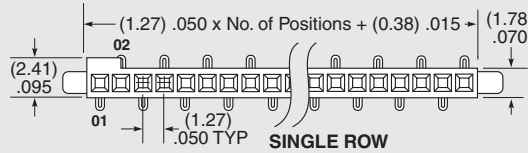


RECOGNITIONS

For complete scope of recognitions see www.samtec.com/quality



Note: Some sizes, styles and options are non-standard, non-returnable.

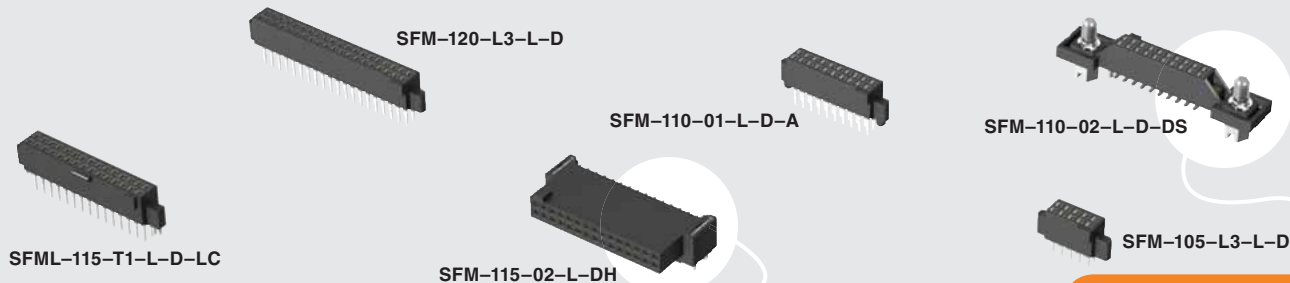

SFM, SFML SERIES

High reliability
Tiger Eye™
contacts

(1.27 mm x 1.27 mm)
.050" x .050" micro pitch

OTHER SOLUTIONS

- Lower cost plating options. See SFC Series.

Mates with TFM
for coplanar and
perpendicular mating

Surface mount or
Through-hole tails



Screw down
option




ALSO AVAILABLE (MOQ Required)

- Solder nail option
- Other sizes
- Other platings
- Contact Samtec.

PLATING OPTION

-L
= 10µ" (0.25 µm) Gold on contact, Matte Tin on tail
(Call Samtec for E.L.P.™ plating option)

LEAD STYLE	A	B
-01, -L1, -T1	(3.05) .120	(0.51) .020
-03, -L3	(1.91) .075	(0.41) .016

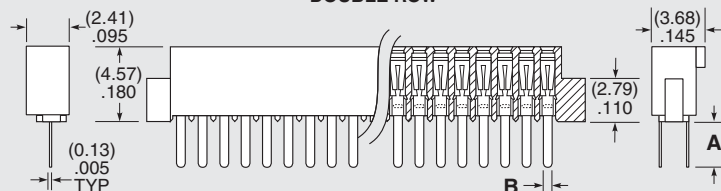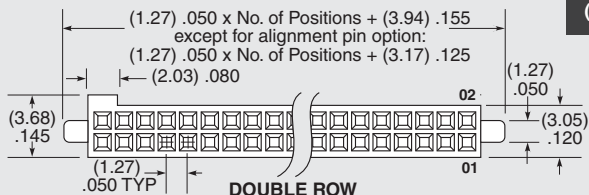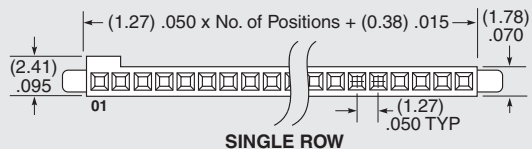


ROW OPTION

-S
= Single Row
(SFM only)

-D
= Double Row

-SH
= Single Horizontal
(05 thru 30 positions only)
(SFM only)
(Lead style -02 only)

-DH
= Double Horizontal
(05 thru 30 positions only)
(SFM only)
(Lead style -02 only)



OPTION

Specify only -A, -LC or -DS
(Not available with -DH, -SH)

-A
= Alignment Pin
(Available with all Lead Styles)

-LC
= Locking Clip
(Available with all lead styles)
(Manual placement required)

-DS
= Dual Screw Down for
(1.60 mm) .062" PCB
(05 thru 40 positions only)
(Lead styles -01, -02 & -03 only)
(Requires -D row option)
(Not available with SFML)
(Mates with TFM-DS option)
(Not available with -A,
-LC, -K, -P, -TR)


Specify only
-K or -P
(Lead styles -02,
-L2, -T2 only)

-K
= Polyimide film
Pick & Place Pad
(Not available
with -DH, -SH)

-P
= Plastic Pick &
Place Pad
(Not available
with -DH, -SH)

Specify -TR last
(Lead styles -02,
-L2, -T2 only)

-TR
= Tape & Reel
(Required callout
for -DH, -SH)

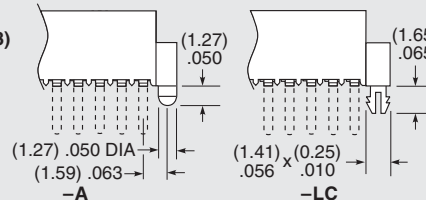

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Headers & Wire Housings](#) category:

Click to view products by [Samtec](#) manufacturer:

Other Similar products are found below :

[95000-104TRLF](#) [10135584-644402LF](#) [DF62W-EP2022PCA](#) [95000-106TRLF](#) [DF62W-2022SCA](#) [DF62W-EP2022PC](#) [2203348](#) [DF62W-2022SC](#) [1084018](#) [1029039](#) [1084017](#) [802-10-012-10-002000](#) [1112640](#) [1112639](#) [000-34000](#) [0009482033](#) [0009507031](#) [57102-S06-03LF](#) [57202-S52-04LF](#) [PCN6-15S-2.5E](#) [0039019024](#) [58102-G61-06LF](#) [582553-1](#) [0009485154](#) [0009508121](#) [0022285053](#) [0050291907](#) [018731A](#) [LY20-4P-DT1-P1E-BR](#) [02.125.8002.8](#) [60101931](#) [60598-1 \(Cut Strip\)](#) [M1625-3R/100](#) [61062-3](#) [61082-181009](#) [636-1427](#) [638009-1](#) [641938-9](#) [641991-4](#) [644168-1](#) [647662-1](#) [65039-019ELF](#) [65817-002LF](#) [65817-015LF](#) [65863-015LF](#) [66207-023LF](#) [67016-026LF](#) [67046-001LF](#) [67095-007LF](#) [67230-005LF](#)