

Miniature Fuse with Pigtail, 5.4 x 22.5 mm, Time-Lag T, H, 250 VAC, UL: 115 - 300 VDC



IEC 60127-2 · 250 VAC · 300 VDC · Time-Lag T



### Description

- IEC Standard Fuse
- H = High Breaking Capacity (Ceramic Tube)

### Standards

- IEC 60127-2/5
- UL 248-14
- CSA C22.2 no. 248.14

### Approvals

- UL File Number: E41599

### Applications

- Primary Protection on PCB
- Power Supply Adapter for e.g. laptops
- SMPS (Switching Mode Power Supply) for TV's and DVD's


### References

[Packaging Details](#)

### Weblinks


[pdf-datasheet](#), [html-datasheet](#), [General Product Information](#), [Approvals](#), [CE declaration of conformity](#), [RoHS](#), [CHINA-RoHS](#), [REACH](#), [e-Shop](#), [SCHURTER-Stock-Check](#), [Distributor-Stock-Check](#), [Detailed request for product](#)

### Technical Data

|                              |  |
|------------------------------|--|
| Rated Voltage                | 250 VAC 300 VDC  |
| Rated current                | 0.5 - 16 A   |
| Breaking Capacity            | 500 A - 1500 A   |
| Characteristic               | Time-Lag T   |
| Admissible Ambient Air Temp. | -55 °C to 125 °C   |
| Climatic Category            | 55/125/21 acc. to IEC 60068-1  |
| Material: Tube               | Ceramic  |
| Material: Endcaps            | Nickel-Plated Copper Alloy   |
| Material: Axial Leads        | Tin-Plated Copper  |
| Unit Weight                  | 1.68 g   |
| Storage Conditions           | 0 °C to 60 °C, max. 70% r.h.   |
| Product Marking              |  , Rated current, Rated voltage, Characteristic, Breaking Capacity, Approvals |

|                              |   |
|------------------------------|---|
| Soldering Methods            | Wave, Iron  |
| Solderability                | 235 °C / 2 sec acc. to IEC 60068-2-20, Test Ta, method 1  |
| Resistance to Soldering Heat | 260 °C / 5 sec acc. to IEC 60068-2-20, Test Tb, method 1A |

### Dimension

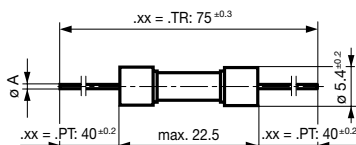


- In ≤ 6.3 A: ØA = 0.65 mm
- 8 A ≤ In ≤ 12.5 A: ØA = 0.8 mm
- In ≥ 16 A: ØA = 1.0 mm

## Pre-Arcing Time

| Rated Current I <sub>n</sub> | 1.5 x I <sub>n</sub> min. | 2.1 x I <sub>n</sub> max. | 2.75 x I <sub>n</sub> min. | 2.75 x I <sub>n</sub> max. | 4.0 x I <sub>n</sub> min. | 4.0 x I <sub>n</sub> max. | 10.0 x I <sub>n</sub> min. | 10.0 x I <sub>n</sub> max. |
|------------------------------|---------------------------|---------------------------|----------------------------|----------------------------|---------------------------|---------------------------|----------------------------|----------------------------|
| 0.5 A - 0.8 A                | 60 min                    | 30 min                    | 250 ms                     | 80 s                       | 50 ms                     | 5 s                       | 5 ms                       | 150 ms                     |
| 1 A - 3.15 A                 | 60 min                    | 30 min                    | 750 ms                     | 80 s                       | 95 ms                     | 5 s                       | 10 ms                      | 150 ms                     |
| 4 A - 6.3 A                  | 60 min                    | 30 min                    | 750 ms                     | 80 s                       | 150 ms                    | 5 s                       | 10 ms                      | 150 ms                     |
| 8 A - 10 A                   | 30 min                    | 30 min                    | 750 ms                     | 80 s                       | 150 ms                    | 5 s                       | 10 ms                      | 150 ms                     |
| 12.5 A - 16 A                | 15 min                    | 30 min                    | 750 ms                     | 80 s                       | 150 ms                    | 5 s                       | 20 ms                      | 150 ms                     |

## Time-Current-Curves

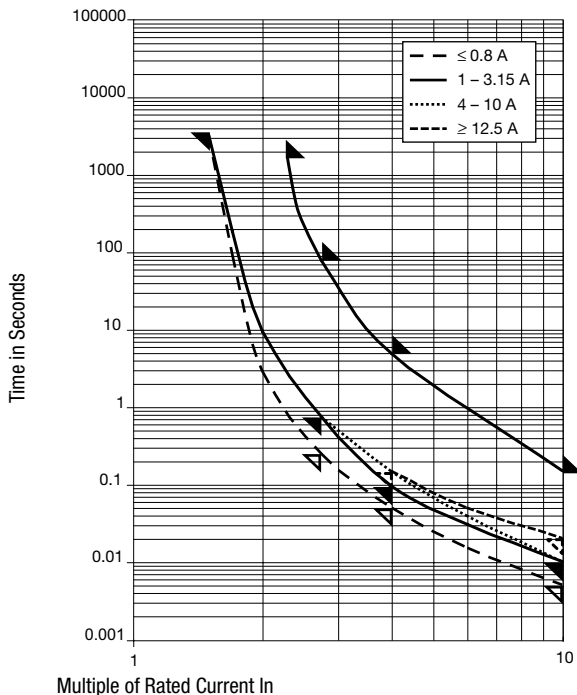

## All Variants

| Rated Current [A] | Rated Voltage [VAC] | Rated Voltage [VDC] | Breaking Capacity | Voltage Drop 1.0 I <sub>n</sub> max. [mV] | Voltage Drop 1.0 I <sub>n</sub> typ. [mV] | Power Dissipation 1.5 I <sub>n</sub> max. [mW] | Power Dissipation 1.5 I <sub>n</sub> typ. [mW] | Melting I <sup>2</sup> t 10.0 Intyp. [A <sup>2</sup> s] | Order Number   |
|-------------------|---------------------|---------------------|-------------------|---|---|--|--|---|----------------|
| 0.5               | 250                 | 300                 | 1)                | 850                                       | 360                                       | 1600   | 500  | 0.5   | ● 0001.2501.xx |
| 0.8               | 250                 | 300                 | 1)                | 500                                       | 260                                       | 1600   | 500  | 2.3   | ● 0001.2503.xx |
| 1                 | 250                 | 300                 | 1)                | 350                                       | 180                                       | 2500   | 500  | 1.1   | ● 0001.2504.xx |
| 1.25              | 250                 | 300                 | 1)                | 300                                       | 150                                       | 2500   | 500  | 1.86  | ● 0001.2505.xx |
| 1.6               | 250                 | 300                 | 1)                | 200                                       | 130                                       | 2500   | 500  | 4.35  | ● 0001.2506.xx |
| 2                 | 250                 | 300                 | 1)                | 190                                       | 120                                       | 2500   | 600  | 9.2   | ● 0001.2507.xx |
| 2.5               | 250                 | 300                 | 1)                | 180                                       | 100                                       | 2500   | 600  | 11.7  | ● 0001.2508.xx |
| 3.15              | 250                 | 300                 | 1)                | 140                                       | 100                                       | 4000   | 800  | 22  | ● 0001.2509.xx |
| 4                 | 250                 | 150                 | 2)                | 100                                       | 90  | 4000   | 900  | 62.4  | ● 0001.2510.xx |
| 5                 | 250                 | 150                 | 2)                | 100                                       | 90  | 4000   | 1200   | 97.5  | ● 0001.2511.xx |
| 6.3               | 250                 | 150                 | 2)                | 100                                       | 70  | 4000   | 1200   | 171   | ● 0001.2512.xx |
| 8                 | 250                 | 150                 | 3)                | 100                                       | 70  | 4000   | 1300   | 268   | ● 0001.2513.xx |
| 10                | 250                 | 150                 | 3)                | 100                                       | 70  | 4000   | 2100   | 400   | ● 0001.2514.xx |
| 12.5              | 250                 | 125                 | 4)                | 100                                       | 70  | 4000   | 2500   | 563   | ● 0001.2515.xx |
| 16                | 250                 | 125                 | 4)                | 100                                       | 70  | 4000   | 3000   | 1500  | ● 0001.2516.xx |

Availability for all products can be searched real-time: <http://www.schurter.com/en/Stock-Check/Stock-Check-SCHURTER>

1) IEC: H = 1500 A @ 250 VAC, p.f. = 0.7 - 0.8

1) UL: 10 kA @ 125 VAC, p.f. = 0.7 - 0.8 / 1500 A @ 250 VAC, p.f. = 0.7 - 0.8 / 1500 A @ 300 VDC

2) IEC: H = 1500 A @ 250 VAC, p.f. = 0.7 - 0.8

| Rated Current [A]  | Rated Voltage [VAC] | Rated Voltage [VDC] | Breaking Capacity | Voltage Drop 1.0 I <sub>n</sub> max. [mV] | Voltage Drop 1.0 I <sub>n</sub> typ. [mV] | Power Dissipation 1.5 I <sub>n</sub> max. [mW] | Power Dissipation 1.5 I <sub>n</sub> typ. [mW] | Melting I <sup>2</sup> t 10.0 Intyp. [A <sup>2</sup> s] | Order Number |
|--|---------------------|---------------------|-------------------|---|---|--|--|---|--------------|
| 2) UL: 10 kA @ 125 VAC, p.f. = 0.7 - 0.8 / 1500 A @ 250 VAC, p.f. = 0.7 - 0.8 / 1500 A @ 150 VDC |                     |                     |                   |   |   |  |  |   |              |
| 3) IEC: 1000 A @ 250 VAC   |                     |                     |                   |   |   |  |  |   |              |
| 3) UL: 1000 A @ 250 VAC, 1500 A @ 150 VDC  |                     |                     |                   |   |   |  |  |   |              |
| 4) IEC: 500 A @ 250 VAC  |                     |                     |                   |   |   |  |  |   |              |
| 4) UL: 500 A @ 125 VAC, p.f. = 0.7 - 0.8 / 1000 A @ 125 VAC / 500 A @ 250 VAC / 1500 A @ 125 VDC |                     |                     |                   |   |   |  |  |   |              |

**Packaging Unit**      .xx = .PT Bulk (1000 pcs.)  
                                  .xx = .TR Taped 33 cm Reel (1000 pcs.)

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Cartridge Fuses](#) category:*

*Click to view products by [Schurter](#) manufacturer:*

Other Similar products are found below :

[MBO-20](#) [MDA-V-1/100](#) [12C10X38GI](#) [AGA-V-2-1/2](#) [AGC-V-3-12-R](#) [AGY-50](#) [MSL-3](#) [MSL-4](#) [MSL-5](#) [BK1/C436-2A](#) [BK1-GMA-1-6-R](#)  
[BK1-GMA-200-R](#) [BK1GMA-6-R](#) [BK1/GMC-100-R](#) [BK1/GMC-1.5-R](#) [BK1-GMC-2-5-R](#) [BK1GMD-4-R](#) [BK1S500-250-R](#) [BK1S500-32-R](#)  
[BK1-S500-4-R](#) [BK1S500-5-R](#) [BK1-S505-1-R](#) [BK1-S506-2-R](#) [BK1-S506-3-15-R](#) [BK1/S506-63-R](#) [BK/ABC-5RX](#) [BK/AGW-B-4](#) [BK/AVX-](#)  
[1/4](#) [BK/C515S-250-R](#) [BK/MBO-20](#) [BK/MBO-8](#) [BK/MDM-3/4](#) [BK-MDQ-4](#) [BK/S505-V-2.5A](#) [BK/TDC120-15](#) [BK/TDC120-20](#)  
[BK/TDC122-45](#) [BP/MDL-7](#) [1C10X38AM](#) [S505-V-500MA](#) [SEF-1697-1-002](#) [AGA-V-7-1/2](#) [AGC-15WX](#) [AGC-2-1-2-R](#) [20.0M6.3X32F](#)  
[20C8X32GI](#) [GMC-50-R](#) [361.250](#) [MBO-8](#) [TDC121-30](#)