SKKT 132, SKKH 132



SEMIPACK[®] 2

Thyristor / Diode Modules

SKKT 132 SKKH 132

Features


- Heat transfer through aluminium oxide ceramic isolated metal baseplate
- Hard soldered joints for high reliability
- UL recognized, file no. E 63532


Typical Applications*


- DC motor control
 (e. g. for machine tools)
- Temperature control
 (e. g. for ovens, chemical
 processes)
- Professional light dimming (studios, theaters)
- 1) See the assembly instructions


V _{RSM}	V _{RRM} , V _{DRM}	I _{TRMS} = 220 A (maximum value for continuous operation)		
V	V	I _{TAV} = 130 A (sin. 180; T _c = 87 °C)		
900	800	SKKT 132/08E	SKKH 132/08E	
1300	1200	SKKT 132/12E	SKKH 132/12E	
1500	1400	SKKT 132/14E	SKKH 132/14E	
1700	1600	SKKT 132/16E	SKKH 132/16E	
1900	1800	SKKT 132/18E	SKKH 132/18E	


Symbol	Conditions	Values	Units
ITAV	sin. 180; T _c = 85 (100) °C;	137 (96)	А
I _D	P3/180; T _a = 45 °C; B2 / B6	77 / 100	А
	P3/180F; T _a = 35 °C; B2 / B6	170 /200	А
I _{RMS}	P3/180F; T _a = 35 °C; W1 / W3	240 / 3 * 163	А
I _{TSM}	T _{vi} = 25 °C; 10 ms	4700	Α
1 OW	T _{vi} = 125 °C; 10 ms	4000	А
i²t	T _{vi} = 25 °C; 8,3 10 ms	110000	A²s
	T _{vi} = 125 °C; 8,3 10 ms	80000	A²s
V _T	T _{vi} = 25 °C; I _T = 500 A	max. 1,8	V
V _{T(TO)}	$T_{vi}^{j} = 125 \text{ °C}$	max. 1	V
r _T	$T_{vi} = 125 \text{ °C}$	max. 1,6	mΩ
I _{DD} ; I _{RD}	T_{vj}^{i} = 125 °C; V_{RD} = V_{RRM} ; V_{DD} = V_{DRM}	max. 40	mA
t _{gd}	T _{vi} = 25 °C; I _G = 1 A; di _G /dt = 1 A/μs	1	μs
t _{gr}	$V_{\rm D} = 0.67 * V_{\rm DRM}$	2	μs
(di/dt) _{cr}	T _{vi} = 125 °C	max. 200	A/µs
(dv/dt) _{cr}	T _{vi} = 125 °C	max. 1000	V/µs
t _q	T _{vi} = 125 °C ,	50 150	μs
I _H	T _{vi} = 25 °C; typ. / max.	150 / 400	mA
I _L	T _{vj} = 25 °C; R _G = 33 Ω; typ. / max.	300 / 1000	mA
V _{GT}	T _{vi} = 25 °C; d.c.	min. 2	V
I _{GT}	T _{vi} = 25 °C; d.c.	min. 150	mA
V _{GD}	T _{vi} = 125 °C; d.c.	max. 0,25	V
I _{GD}	T _{vj} = 125 °C; d.c.	max. 10	mA
R _{th(j-c)}	cont.; per thyristor / per module	0,18 / 0,09	K/W
R _{th(j-c)}	sin. 180; per thyristor / per module	0,19 / 0,095	K/W
R _{th(j-c)}	rec. 120; per thyristor / per module	0,21 / 0,105	K/W
R _{th(c-s)}	per thyristor / per module	0,1 / 0,05	K/W
T _{vi} `´		- 40 + 125	°C
T _{stg}		- 40 + 125	°C
V _{isol}	a. c. 50 Hz; r.m.s.; 1 s / 1 min.	3600 / 3000	V~
M _s	to heatsink	5 ± 15 % ¹⁾	Nm
Mt	to terminal	5 ± 15 %	Nm
а		5 * 9,81	m/s²
m	approx.	165	g
Case	SKKT	A 21	
	SKKH	A 22	




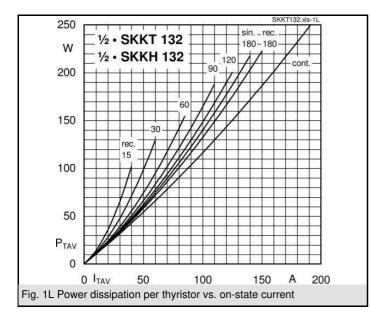


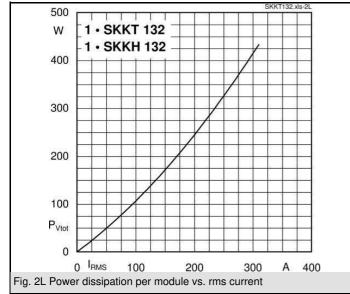

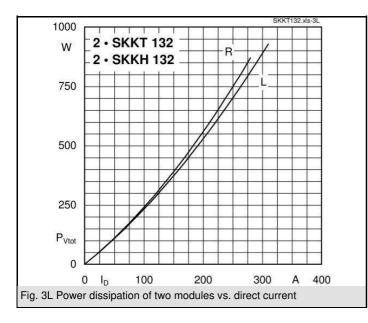

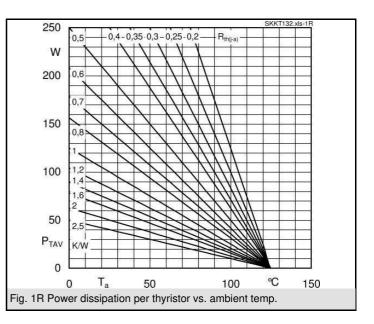

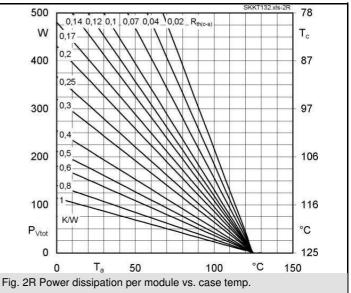


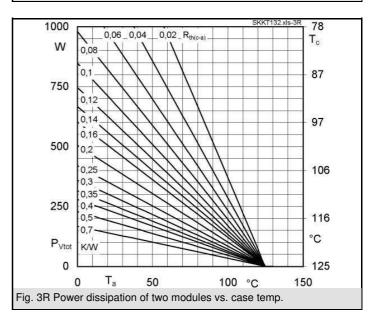



© by SEMIKRON


16-04-2007 GIL


SKKT 132, SKKH 132

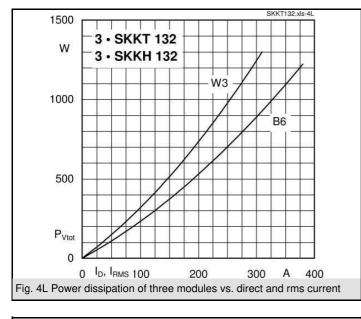





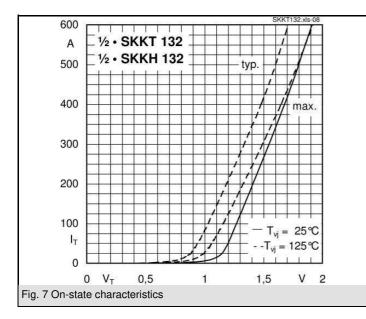


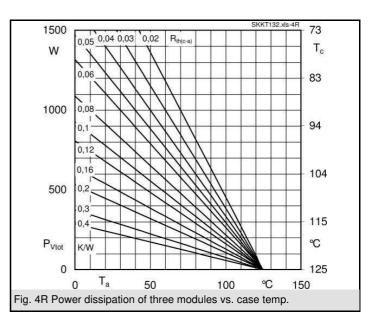


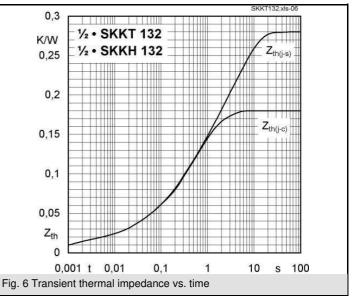

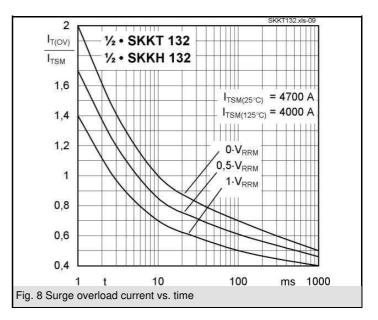

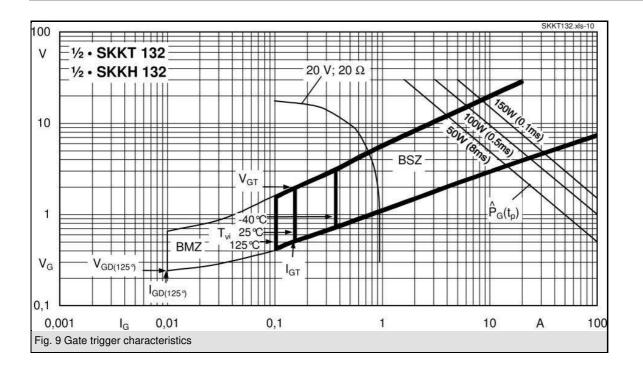

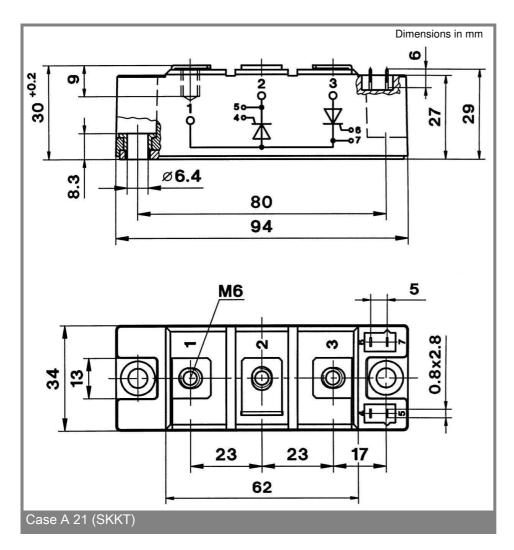



* The specifications of our components may not be considered as an assurance of component characteristics. Components have to be tested for the respective application. Adjustments may be necessary. The use of SEMIKRON

SKKT 132, SKKH 132

products in life support appliances and systems is subject to prior specification and written approval by SEMIKRON. We therefore strongly recommend prior consultation of our personal.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for SCR Modules category:

Click to view products by Semikron manufacturer:

Other Similar products are found below :

DT430N22KOF DT61N16KOF-K T1401N42TOH T1851N60TOH T390N14TOF T420N12TOF T470N16TOF T640N16TOF T901N36TOF TD142N16KOF TD162N16KOF-A TD330N16AOF TZ310N20KOF TZ425N12KOF TZ500N12KOF T300N14TOF T3710N06TOF VT T390N16TOF T420N16TOF T460N24TOF T501N70TOH T560N16TOF T590N16TOF T640N14TOF TD250N14KOF TD570N16KOF TT600N16KOF TZ240N36KOF TT210N12KOF NTE5710 TD180N16KOF TT240N28KOF TZ425N14KOF T1081N60TOH TT61N08KOF TD251N18KOF TZ240N34KOF TT162N08KOF TD285N16KOF TT180N12KOF T2001N34TOF TT122N22KOF TD140N22KOF MDMA200P1600SA TT180N16KOF VS-ST180C14C0L T1080N02TOF TD320N16SOF T360N22TOF TZ810N22KOF