

SURFACE MOUNT PTC SL (2920) MODEL


■ FEATURES

- 2920 Dimension, surface mount, solid state
- Faster time to trip than standard SMD devices
- Lower resistance than standard SMD devices
- Operation current: 300mA~2.6A
- Maximum voltage: 6V~60Vdc
- Temperature range: -40°C to 85°C
- Tape and reel available on most models


■ APPLICATIONS

- ◆ Almost anywhere there High-density boards is a low voltage power supply and a load to be protected including:
 - Computers & peripherals
 - General electronics
 - Automotive applications


■ PART NUMBERING SYSTEM

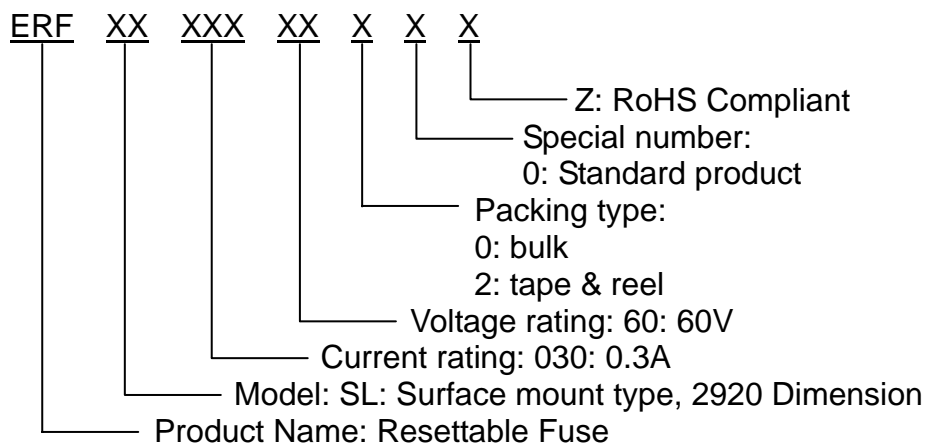

■ Marking system



Example

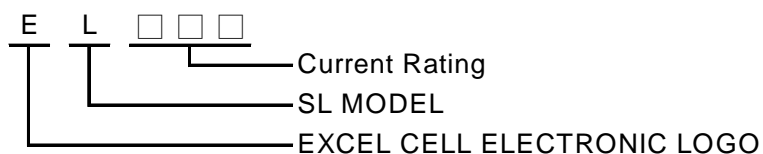

NOTE: Specifications subject to change without prior notice.

■ Electrical characteristics(23°C)

Part Number	Hold Current	Trip Current	Rated Voltage	Maximum Current	Typical Power	Max. Time to trip		Resistance Tolerance	
	I_H, A	I_T, A	V_{MAX}, V_{dc}	I_{MAX}, A	P_d, W	Amp	Sec	R_{MIN}	$R1_{MAX}$
	Ω	Ω							
SL030	0.30	0.60	60	10	1.5	1.5	3.0	1.00	4.80
SL050	0.50	1.00	60	10	1.5	2.5	4.0	0.30	1.40
SL075	0.75	1.50	33	40	1.5	8.0	0.3	0.18	1.00
SL110	1.10	2.20	33	40	1.5	8.0	0.5	0.09	0.41
SL125	1.25	2.50	33	40	1.5	8.0	2.0	0.06	0.25
SL150	1.50	3.00	33	40	1.5	8.0	2.0	0.05	0.23
SL185	1.85	3.70	33	40	1.5	8.0	2.5	0.04	0.15
SL200	2.00	4.00	16	40	1.5	8.0	4.5	0.035	0.12
SL250	2.50	5.00	16	40	1.5	8.0	16	0.030	0.085
SL260	2.60	5.20	6	40	1.5	8.0	20	0.025	0.075

I_H =Hold current-maximum current at which the device will not trip at 23°C still air.

I_T =Trip current-minimum current at which the device will always trip at 23°C still air.

V_{MAX} =Maximum voltage device can withstand without damage at rated current.

I_{MAX} = Maximum fault current device can withstand without damage at rated voltage (V max).


P_d =Typical power dissipated from device when in the tripped state in 23°C still air environment.

R_{MIN} =Minimum device resistance at 23°C.

$R1_{MAX}$ =Maximum device resistance at 23°C 1 hour after tripping .


■ Typical time-to-trip-at 23°C

A=SL030
B=SL050
C=SL075
D=SL110
E=SL125
F=SL150
G=SL185
H=SL200
I=SL250
J=SL260

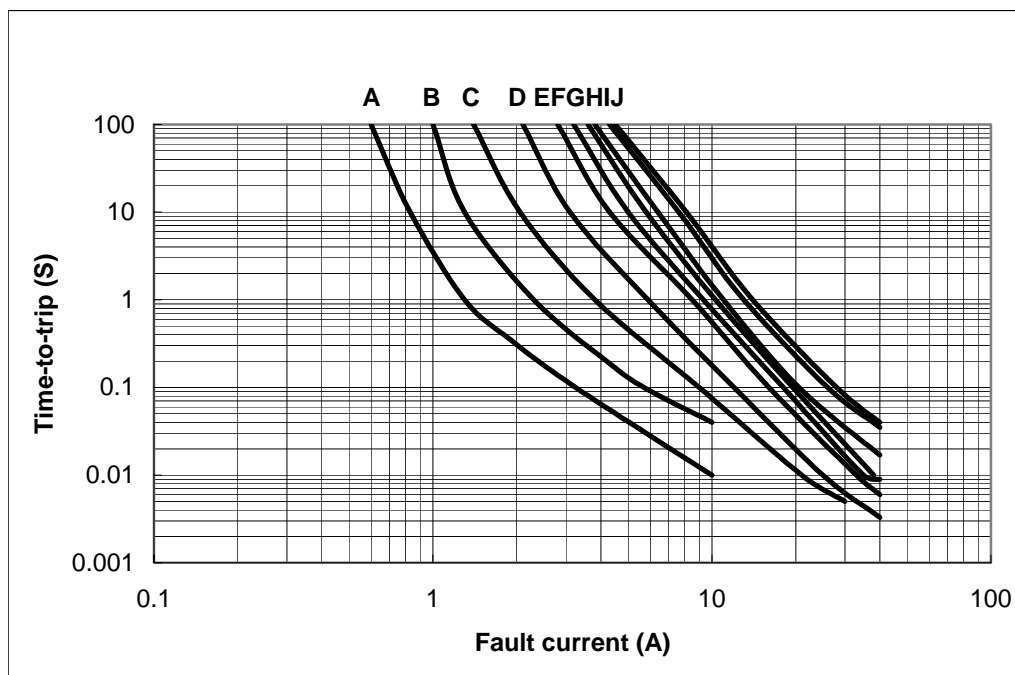


NOTE: Specifications subject to change without prior notice.

■ Thermal Derating Curve

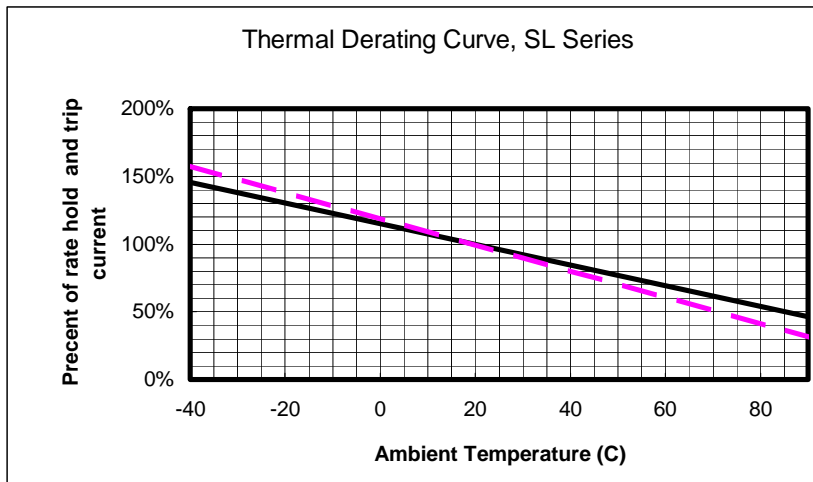

■ SL Product Dimensions (UNIT: mm)


Part Number	A		B		C		D
	Min	Max	Min	Max	Min	Max	Min
SL030	6.73	7.98	4.08	5.44	0.60	1.15	0.35
SL050	6.73	7.98	4.08	5.44	0.60	1.15	0.35
SL075	6.73	7.98	4.08	5.44	0.60	1.15	0.35
SL110	6.73	7.98	4.08	5.44	0.40	1.00	0.35
SL125	6.73	7.98	4.08	5.44	0.40	0.90	0.35
SL150	6.73	7.98	4.08	5.44	0.40	0.90	0.35
SL185	6.73	7.98	4.08	5.44	0.40	0.90	0.35
SL200	6.73	7.98	4.08	5.44	0.40	0.90	0.35
SL250	6.73	7.98	4.08	5.44	0.40	0.90	0.35
SL260	6.73	7.98	4.08	5.44	0.40	0.90	0.35

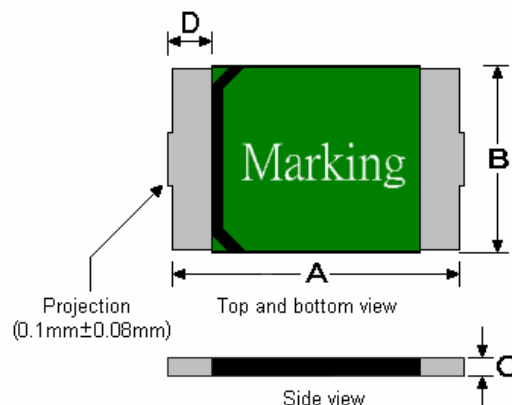

NOTE: Specifications subject to change without prior notice.

■ Pad Layouts and Soldering Reflow Recommendations

The dimension in the table below provide the recommended pad layout for each surface mount device

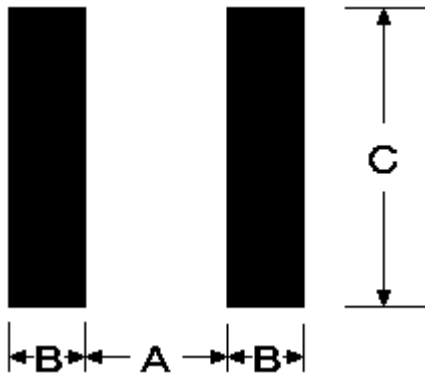


Pad dimensions(millimeters)			
Device	A Nominal	B Nominal	C Nominal
SL MODEL	5.10	2.30	5.60
SD MODEL	3.45	1.78	3.50
SM MODEL	2.00	1.00	2.80
SN MODEL	2.00	1.00	1.90

■ SOLDERING REFLOW (LEAD FREE)

- 1.Suggested reflow methods: IR, vapor phase oven, hot air oven.
- 2.Suitable for use with wave-soldering methods.
- 3.Recommended maximum paste thickness is 0.25mm.

■ CAUTION

If reflow temperatures exceed the recommended standard, devices may not be able to meet the performance requirements.

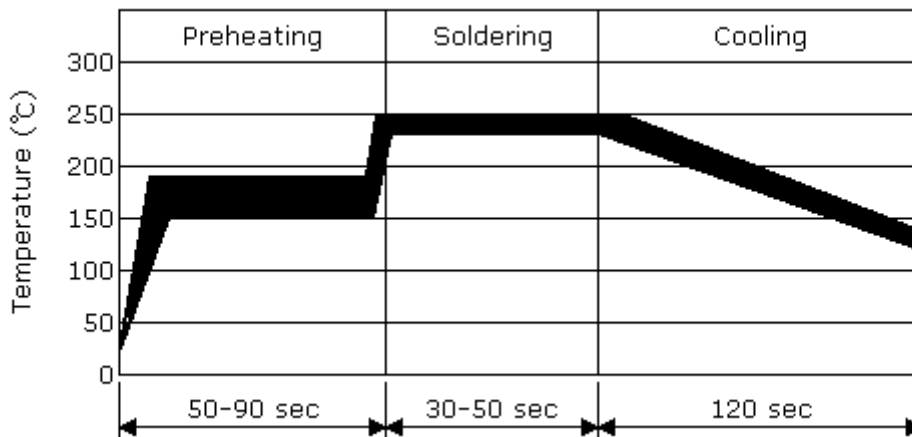

NOTE: Specifications subject to change without prior notice.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Surface Mount Fuses](#) category:

Click to view products by [ECC manufacturer](#):

Other Similar products are found below :

[FHC20402ADTP](#) [FT600-0500-2](#) [NFVC6125S0R50TRF](#) [SFT-125MA](#) [TF16SN2.00TTD](#) [41921000000](#) [TR/3216LR-500MA](#) [CCP2B20TTE](#)
[TR-3216FF4-R](#) [SST 1-1K](#) [SST 5 -1K](#) [SST 2-1K](#) [TR2-TCP500-R](#) [F60C500V12AS](#) [FCC16501ABTP](#) [FCC16102ABTP](#) [FHC16322ADTP](#)
[0308.250UR](#) [0308.375UR](#) [0308.500UR](#) [0308.750UR](#) [0308001.UR](#) [030801.5UR](#) [FCC16202ABTP](#) [3-122-714](#) [3-122-720](#) [3-122-718](#) [3-122-](#)
[712](#) [3-122-716](#) [03081.25UR](#) [CQ06LF 5A 32V](#) [CQ06LT 5A 32V](#) [SET 2A 125V \(G\)](#) [SET 1A 125V \(G\)](#) [SEF 10A 125V \(G\)](#) [SEF 3A 125V \(G\)](#)
[SEF 4A 125V \(G\)](#) [SEF 6A 125V \(G\)](#) [SEF 7A 125V \(G\)](#) [SET 4A 125V \(G\)](#) [SET 3A 125V \(G\)](#) [SET 5A 125V \(G\)](#) [SET 7A 125V \(G\)](#)
[F0603G0R03FNTR](#) [SKY87604-12](#) [SKY87604-11](#) [SKY87604-13](#) [0154002.DRL](#) [0154008.DRL](#) [0154.125DRL](#)