


FerriSSD®

Quick Reference

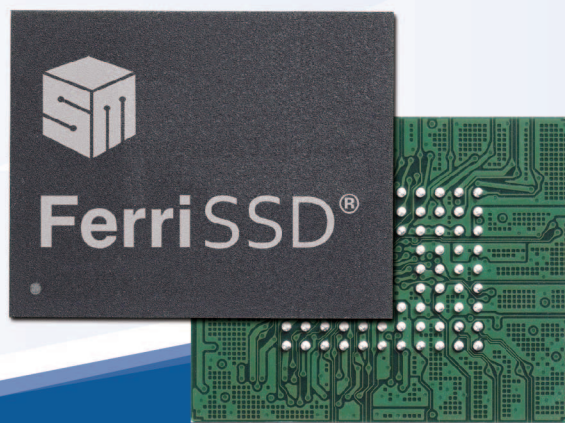


FerriSSD® BGA Solid-State Drive

The FerriSSD® is designed optimally for a wide range of embedded applications requiring faster access, small form factor and reliable SATA/PATA storage. By combining industry proven controller technology, NAND flash and passive components into a single BGA package with 1.0mm ball-pitch size, FerriSSD® simplifies design efforts, reduces time-to-market while protecting from NAND technology migration concerns. FerriSSD® also comes with advanced firmware features as well as the provision for customized firmware – enabling highly reliable and differentiable storage solutions.

The FerriSSD® family consists of the latest SM619 and SM659 series featuring SATA 6Gb/s transfer rate with embedded DRAM to enhance data storage efficiency and high random read/write IOPS of up to 75,000. Also available in the family are the SM651/SM631/SM611 SATA 3Gb/s series as well as the SM621/SM641/SM601 PATA series single-package SSDs. All FerriSSD® series support SLC, SLCmode and MLC NAND flash options.

SMI BGA-SSD Overview

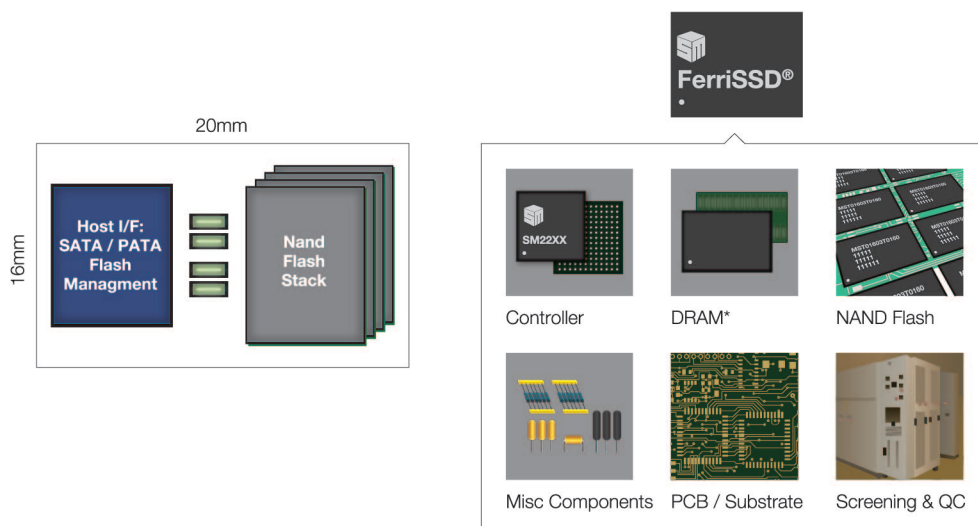

*Available in SM619/SM659 series

Why FerriSSD®?

Easy to use

- Plug & Play only requires format/fdisk prior to use
- Small footprint for space-limited design

Lower total cost of ownership

- Rugged & Reliable (no moving parts)
- Eliminate requalification cost from NAND generation change
- Cost saving with low density FerriSSD, HDD are typically > 160GB capacity

Eliminate down time

- Supports self-monitoring, analysis and reporting technology commands (S.M.A.R.T.)
- Field programmable firmware available

Applications

Embedded applications that are currently using HDD but require only small density can migrate to FerriSSD® for customizable density with a small form factor !



Telecom & Server



Multifunction Printer



POS & Kiosk



Testing Instrument



Ind. Handheld Device



HMI & Thin Client



Ind. / Embedded MB



In-Vehicle Infotainment



Medical Equipment

Specifications

Data Retention	JESD47G compliant
Form Factor	20mm x 16mm BGA
Green Product	RoHs compliant / Halogen free
Temperature Support	Commercial Temp (0°C ~ +70°C) Industrial Temp (-40°C ~ +85°C)

Available Density

FerriSSD® Series	PATA	SATA 3Gb/s	SATA 6Gb/s with DRAM
SLC	SM621 (1~32GB)	SM631 (1~32GB)	--
SLCmode	SM641 (1~32GB)*	SM651 (1~32GB)*	SM659 (8~32GB)*
MLC	SM601 (4~64GB)**	SM611 (2~64GB)**	SM619 (16~64GB)**


*64GB in Q1'15; **128GB in Q4'14

FerriSSD® Unique Features

GENERAL FEATURES




Hardware Quick Erase



Secured Erase



Secured Password Protection



Hardware Data Flush

ADVANCED FEATURES



Full Slumber /
Energy Save Mode



Full Disk AES Encryption



Diagnostic Port




SSDLifeGuard
(Monitoring AP)



Advance Field FW Update



Built-in Temperature
Sensor



Intelligent Clean



Intelligent Scan +
DataRefresh

For more information about FerriSSD®, please go to www.siliconmotion.com or send e-mail to ferri@siliconmotion.com



www.siliconmotion.com

Silicon Motion, Inc.


8F-1, No. 36, Taiyuan St., Jhubei City,

Hsinchu County 30265, Taiwan

Tel: +886-3-5526888

FerriSSD®

For Server Applications

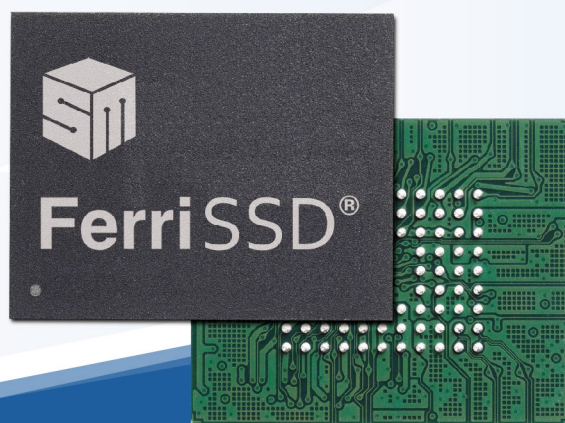


FerriSSD® BGA Solid-State Drive

The FerriSSD® is designed optimally for a wide range of embedded applications requiring faster access, small form factor and reliable SATA/PATA storage. By combining industry proven controller technology, NAND flash and passive components into a single BGA package with 1.0mm ball-pitch size, FerriSSD® simplifies design efforts, reduces time-to-market while protecting from NAND technology migration concerns. FerriSSD® also comes with advanced firmware features as well as the provision for customized firmware – enabling highly reliable and differentiable storage solutions.

The FerriSSD® family consists of the latest SM619 and SM659 series featuring SATA 6Gb/s transfer rate with embedded DRAM to enhance data storage efficiency and high random read/write IOPS of up to 75,000. Also available in the family are the SM651/SM631/SM611 SATA 3Gb/s series as well as the SM621/SM641/SM601 PATA series single-package SSDs. All FerriSSD® series support SLC, SLCmode and MLC NAND flash options.

SMI BGA-SSD Overview

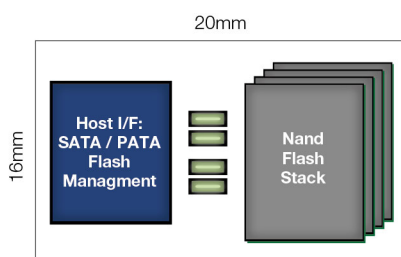

Available Density

FerriSSD® Series	PATA	SATA 3Gb/s	SATA 6Gb/s with DRAM
SLC	SM621 (1~32GB)	SM631 (1~32GB)	--
SLCmode	SM641 (1~32GB)*	SM651 (1~32GB)*	SM659 (8~32GB)*
MLC	SM601 (4~64GB)**	SM611 (2~64GB)**	SM619 (16~64GB)**

*64GB in Q1'15; **128GB in Q4'14


Server Applications

- Blade Server
- Router / Switch
- Application Server
- Telecom Base Station
- Network Firewall Server
- VoIP Server
- Business Telecom System

Specifications

Data Retention	JESD47G compliant
Form Factor	20mm x 16mm BGA
Green Product	RoHs compliant / Halogen free
Temperature Support	Commercial Temp (0°C ~ +70°C) Industrial Temp (-40°C ~ +85°C)

1


**Serving as HDD on a space limited server board**

20x16mm compact size makes a perfect fit for single board computer / embedded motherboard, and server board applications. With Intelligent Scan & DataRefresh algorithm, FerriSSD® is designed to meet the toughest embedded storage requirement.


2

Replacing boot drive & serve as Data Caching

As a cost saving option, FerriSSD® serve as HDD replacement for OS/Application/log file and DRAM temp data cache.

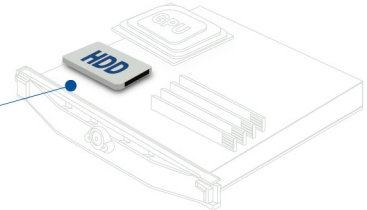

3

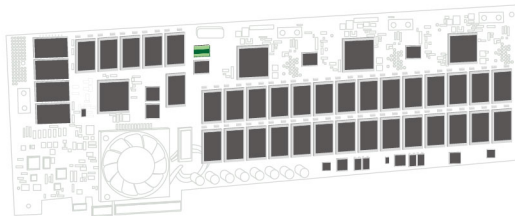
**Replacing RAID SSD: multiple SSD controller + NAND**

FerriSSD®'s compact size with extreme high IOPS enables a perfect RAID SSD/HDD replacement in Compact PCI / Slot CPU boards.


4

Replacing SSD controller + NAND for simple manufacturing

Coming in a single-BGA package, FerriSSD® is already initialized, 100% tested, screened out early failure to ensure extreme low dPPM defect during full usage life.

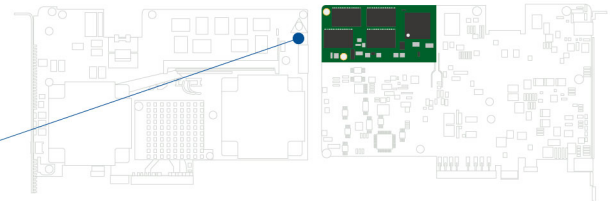

5

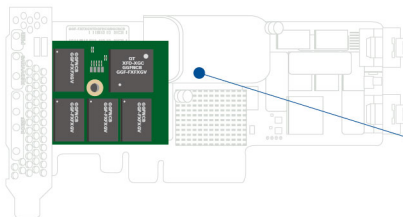
**Serving as Server DRAM backup during sudden power lost**

In the mission critical application, data lost is not acceptable even during sudden power lost. FerriSSD® extreme fast performance in a compact size is the best non volatile solution for DRAM data backup.

6

Replacing CF card on servers for cost down (reducing component) & performance improvement


FerriSSD® in PATA interface serve as direct replacement for CF at higher performance.

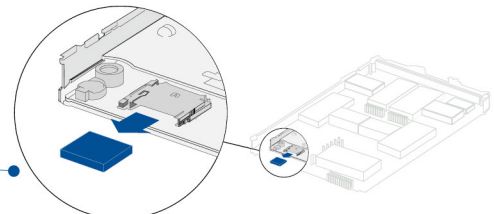

For more information about FerriSSD®, please go to www.siliconmotion.com or send e-mail to ferri@siliconmotion.com

FerriSSD®

For Embedded
Computing Applications

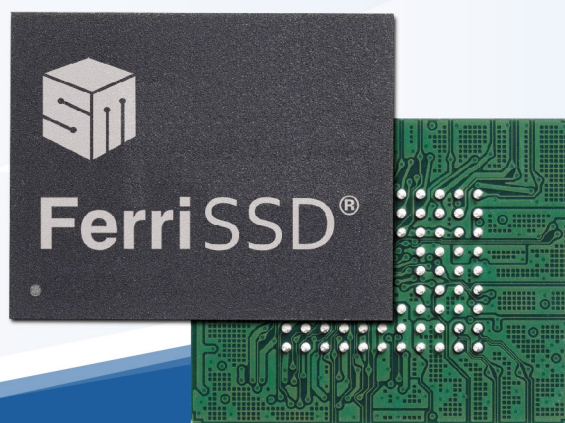


FerriSSD® BGA Solid-State Drive

The FerriSSD® is designed optimally for a wide range of embedded applications requiring faster access, small form factor and reliable SATA/PATA storage. By combining industry proven controller technology, NAND flash and passive components into a single BGA package with 1.0mm ball-pitch size, FerriSSD® simplifies design efforts, reduces time-to-market while protecting from NAND technology migration concerns. FerriSSD® also comes with advanced firmware features as well as the provision for customized firmware – enabling highly reliable and differentiable storage solutions.

The FerriSSD® family consists of the latest SM619 and SM659 series featuring SATA 6Gb/s transfer rate with embedded DRAM to enhance data storage efficiency and high random read/write IOPS of up to 75,000. Also available in the family are the SM651/SM631/SM611 SATA 3Gb/s series as well as the SM621/SM641/SM601 PATA series single-package SSDs. All FerriSSD® series support SLC, SLCmode and MLC NAND flash options.

SMI BGA-SSD Overview

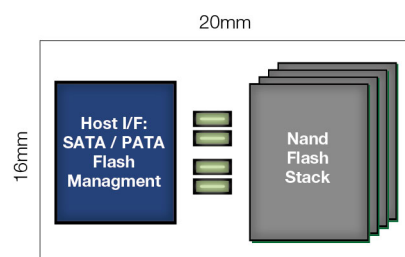

Available Density

FerriSSD® Series	PATA	SATA 3Gb/s	SATA 6Gb/s with DRAM
SLC	SM621 (1~32GB)	SM631 (1~32GB)	--
SLCmode	SM641 (1~32GB)*	SM651 (1~32GB)*	SM659 (8~32GB)*
MLC	SM601 (4~64GB)**	SM611 (2~64GB)**	SM619 (16~64GB)**

*64GB in Q1'15; **128GB in Q4'14


Embedded Computing Applications

- POS / Kiosk
- Video Arcade Gaming
- Multifunction Printer
- In-Vehicle Infotainment
- Surveillance (DVR)
- Thin Client
- HMI / Factory Automation
- Medical Equipment

Specifications

Data Retention	JESD47G compliant
Form Factor	20mm x 16mm BGA
Green Product	RoHs compliant / Halogen free
Temperature Support	Commercial Temp (0°C ~ +70°C) Industrial Temp (-40°C ~ +85°C)

Application Examples :

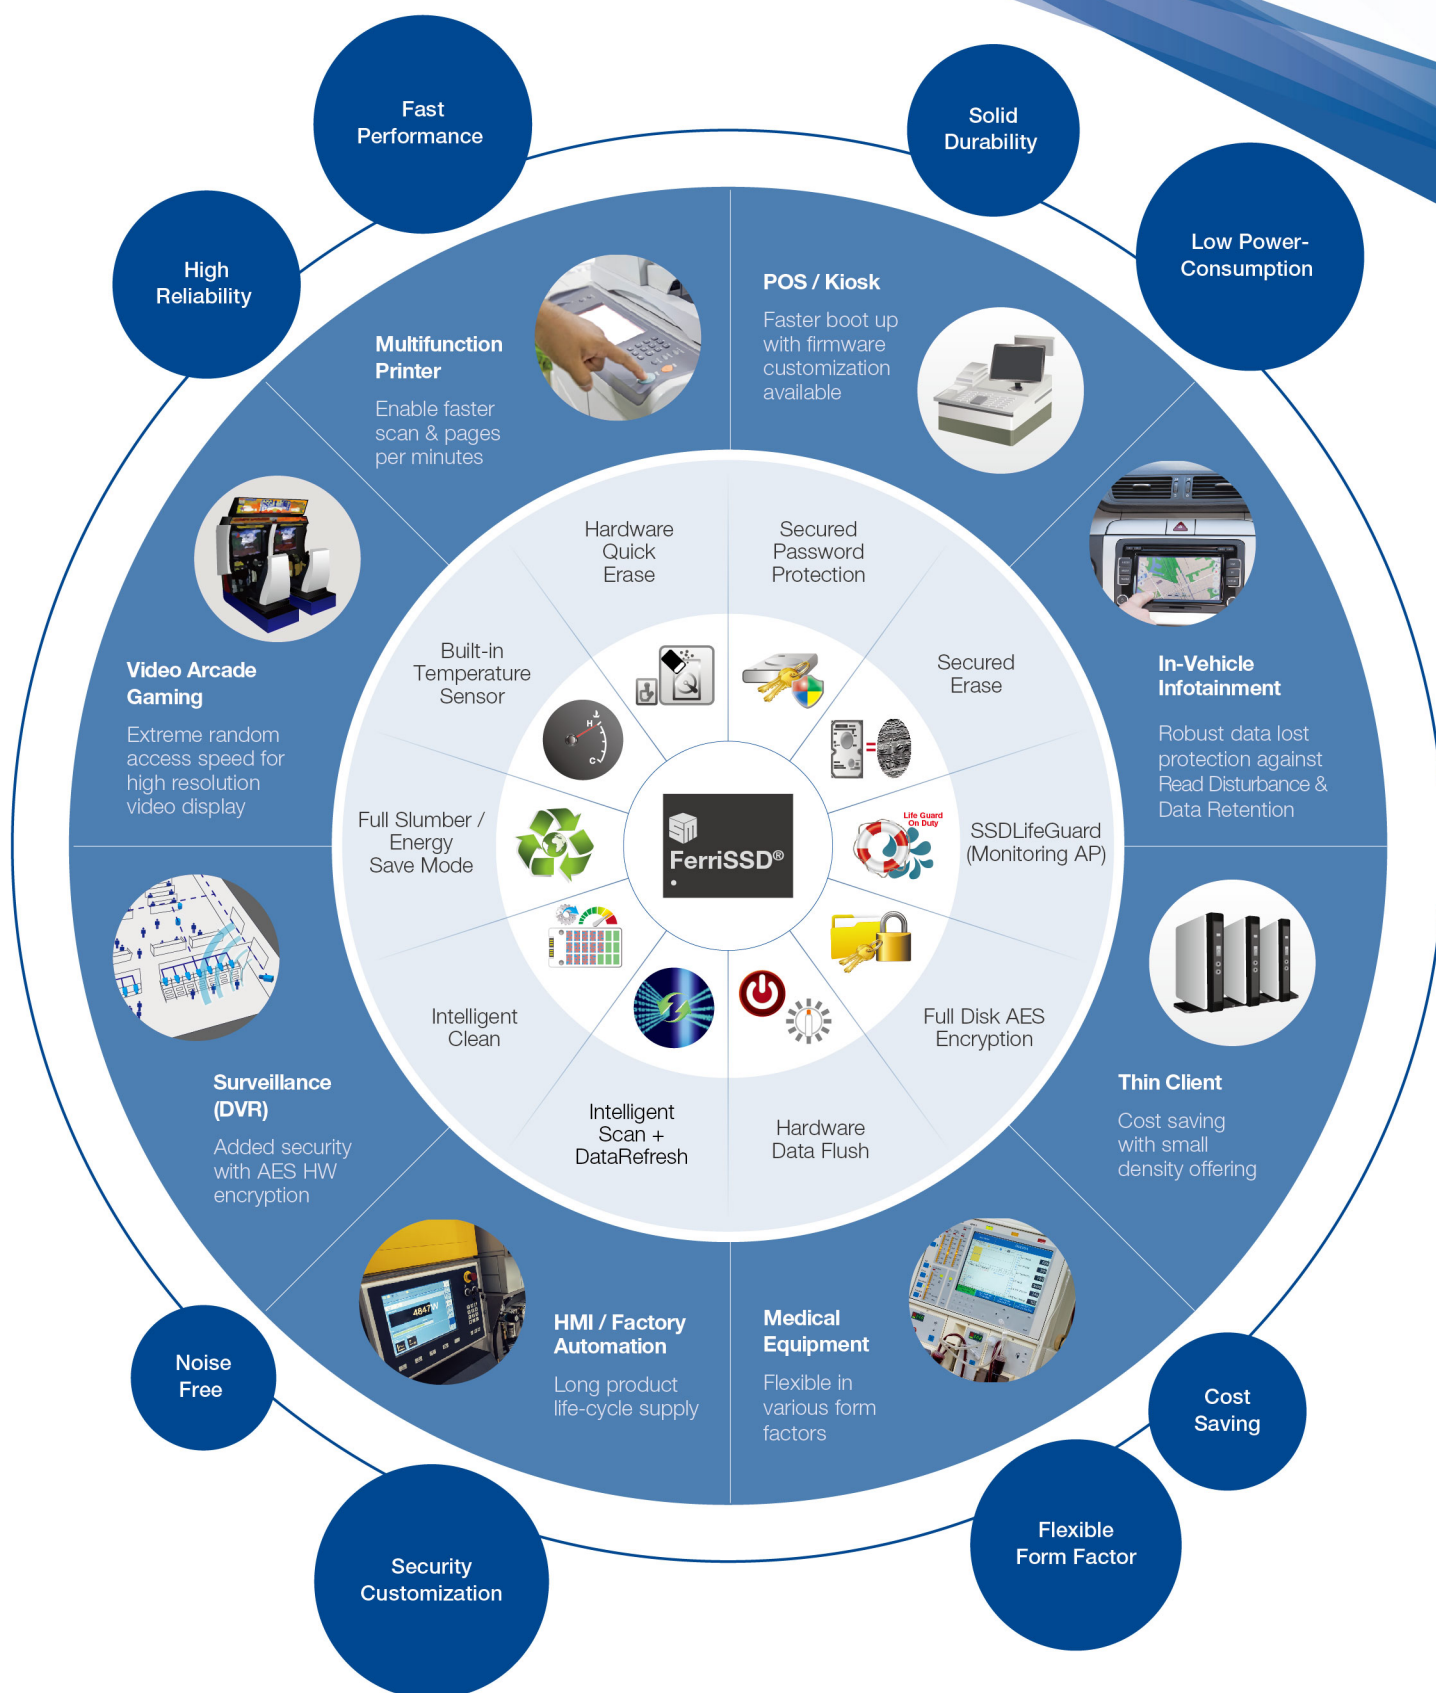

For more information about FerriSSD®, please go to www.siliconmotion.com or send e-mail to ferri@siliconmotion.com



www.siliconmotion.com

Silicon Motion, Inc.
8F-1, No. 36, Taiyuan St., Jhubei City,
Hsinchu County 30265, Taiwan
Tel: +886-3-5526888

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Solid State Drives - SSD category](#):

Click to view products by [Silicon Motion manufacturer](#):

Other Similar products are found below :

[MTFDDAK256MAZ-1AE12ABYY](#) [SSDSC2CT120A3K5](#) [MTFDDAC512MAM-1K1](#) [SSDPEKKF010T7X1](#) [ATCA7360-MMOD-SATA2](#)
[SQF-S25S2-8G-S9C](#) [SQF-SLMM4-128G-S9C](#) [96FD25-S128-TR7](#) [SQF-SMSS4-32G-S8E](#) [96FD25-S512-TR7](#) [SQF-SLMM4-16G-S9E](#) [SQF-](#)
[SDMS4-16G-J6C](#) [SQF-S25S4-16G-S9C](#) [96FD80-N128-LIS](#) [ASD25-MLC064G-CT-160-1](#) [SQF-SMSU4-32G-S9E](#) [SQF-SMSU4-256G-SBE](#)
[SQF-SMSM4-32G-S9E](#) [SQF-SMSM4-16G-S9C](#) [SQF-SMSM2-8G-S9E](#) [SQF-SHMS2-16G-S9C](#) [96ND1T-ST-SG7E](#) [SQF-SMSM4-128G-SBE](#)
[SQF-S25U4-128G-SBC](#) [96FD-M032-TR71](#) [SQF-SHMM1-32G-SBC](#) [SSDSC2BX800G401940785](#) [SSDSCKJB150G701](#) [SDUFD33-016G](#)
[SD7SN6S-128G-1122](#) [AF512UDI-FLU003](#) [SDLF1DM-800G-1HA1](#) [SM619GED-CDZ SPA31L](#) [SD9SN8W-128G-1122](#) [SD9SN8W-128G](#)
[SDINBDG4-32G-XI1](#) [SSDSC2KR120H6XN](#) [SDSDQAD-128G](#) [SM668GXB-ACS O1118](#) [SDSDAA-016G](#) [SDLF1CRM-016T-1HA1](#)
[0T00327](#) [MTFDDAA240MBB-2AE1ZABYY](#) [SSDSC2BX200G401940779](#) [SQF-S25V4-240G-SCC](#) [SQF-SDMM2-256G-S9E](#) [SQF-SHMM2-](#)
[64G-SBE](#) [APSDM001G12AN-PT](#) [96FD25-ST256G-M13](#) [SQF-SM8V4-240G-SCC](#)