

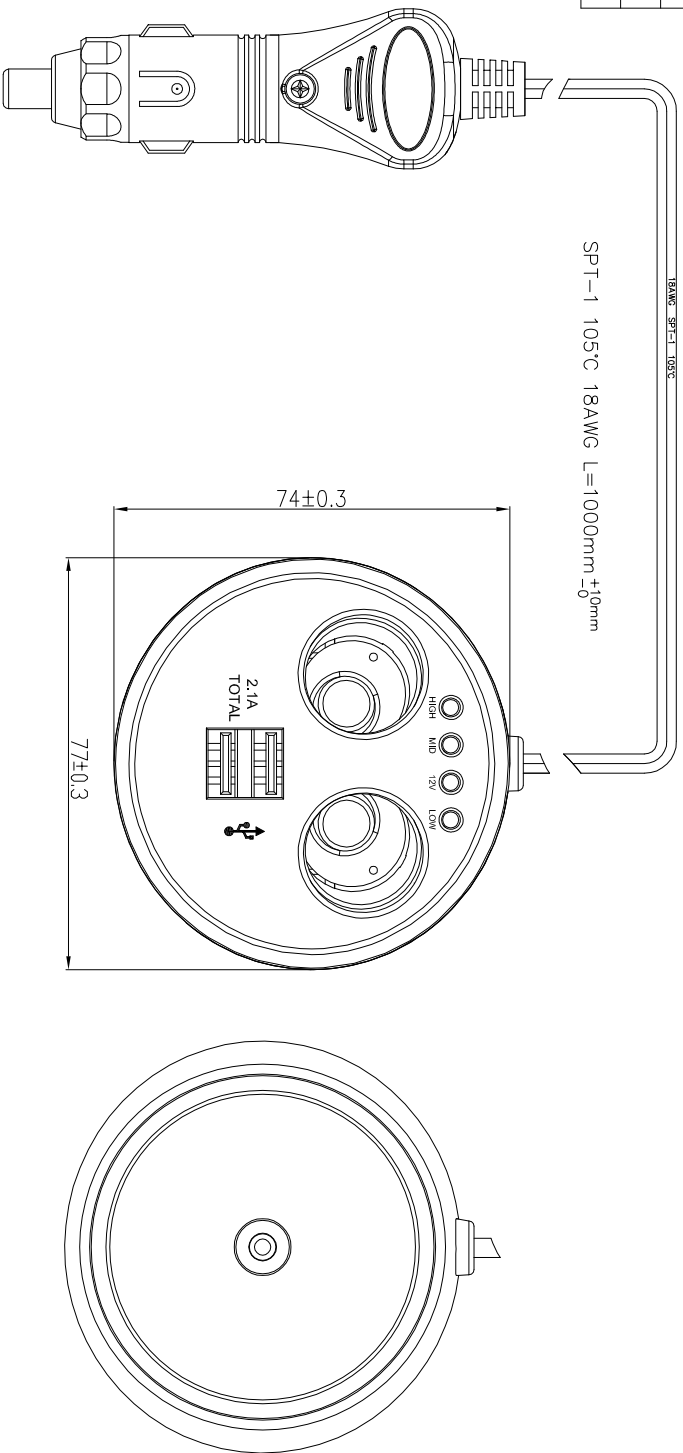


Rating	Input	12V DC
	Output	Socket Total output - 10A max. Twin USB - 5V/2.1A Total.
Insulation Resistance		DC 500V 100M ohm Min.
Dielectric Strength		AC 1000V 1 minute.
Operation Temperature		-20°C-60°C

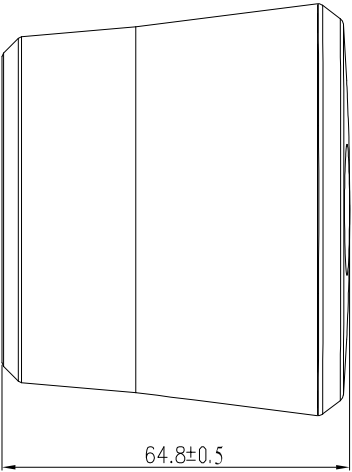

1. LED WORKING VOLTAGE:

		VOLTAGE(±0.2)
LOW	RED	~ 11.8V
12V	ORANGE	12.0~12.5V
MID	YELLOW	12.5~13.0V
HIGH	GREEN	13.0~14V MAX

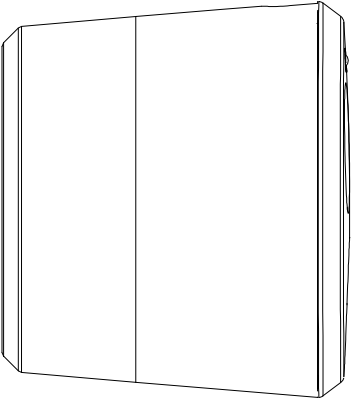

Date	Name	Description	Drawn	Checked	Approved	SCI BOM No.	Customer No.	Unit	mm	Model Name	汽車延長插座	Model No.	A13-75B155B1-A3	Rev.	0
			方婷鳳												
			09/09/15												

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Standard Circular Connector](#) category:

Click to view products by [SCI manufacturer](#):

Other Similar products are found below :

[C015](#) [10F006](#) [001](#) [1](#) [5M2530B10P](#) [600247N007](#) [600259N006](#) [600273N007](#) [600432N009](#) [6280-2PG-519](#) [6280-3PG-311](#) [6280-3SG-311](#)
[6280-7SG-3DC](#) [6280-7SG-522](#) [6282-5PG-311](#) [6282-6PG-519](#) [6282-8SG-311](#) [6283-11](#) [6283-15](#) [6290](#) [6293](#) [6382-2PG-311](#) [6382-2PG-3DC](#)
[6382-2SG-321](#) [6382-2SG-3DC](#) [6382-4SG-516](#) [67-03E20-37P](#) [681-PMG](#) [CXC3106A1811S](#) [CXS3102A14S2P](#) [CXS3102A181S](#)
[CXS3106A14S6S](#) [D38999/20FC8SA L/C](#) [MB12P-1](#) [MB12R-6](#) [7251-2PG-300](#) [7251-2SG-300](#) [7251-4PG-300](#) [7251-4SG-300](#) [7251-5PG-300](#)
[7251-5SG-300](#) [7251-6SG-300](#) [7251-7PG-300](#) [7251-8PG-300](#) [7271-6SG-300](#) [7282-3PG-300-CH3](#) [73000005663](#) [75-190011-03P](#) [75-190216-08S](#) [75-190218-10P](#) [75-214636-52P](#) [75-474118-10P](#) [75-474211-03P](#)