

# LOW FREQUENCY REFLOWABLE CYLINDRICAL WATCH CRYSTAL



8.3 x 2.7mm

AB26TRJ

**RoHS**  
Compliant

## FEATURES:

- Formed leads for low cost SMD type
- Excellent shock resistance
- IR reflow capable
- Low cost for consumer applications

## APPLICATIONS:

- Real time clock
- Measuring instruments
- Blue-tooth and wireless applications

## STANDARD SPECIFICATIONS:

### PARAMETERS

ABRACON P/N	AB26TRJ Series
Frequency Range	32.768kHz / 25kHz to 200kHz
Operating Temperature	-40°C to + 85°C
Turn-over Temperature	+25°C to ± 5°C
Storage Temperature	-55°C to +125°C
Frequency Tolerance	± 20 ppm max. for 32.768kHz / ± 30 ppm max. for 25kHz to 200kHz
Frequency Stability	-0.034 ± 0.006ppm/°C <sup>2</sup>
Equivalent Series Resistance	40kohms max. (32.768kHz / 25kHz to 200kHz)
Shunt Capacitance C0	1.1pF typ. For 32.768kHz / 0.8 to 1.7pF for 25kHz to 200kHz
Load Capacitance CL	12.5pF (see options)
Quality Factor	70,000 typ. for 32.768kHz / 70,000 to 100,000 for 25kHz to 200kHz
Drive Level	1μW max.
Aging at 25°C first year	± 3 ppm max. for 32.768kHz / ± 5 ppm max. for 25kHz to 200kHz
Insulation Resistance	500 MW min. at 100 Vdc ± 15V

## OPTIONS & PART IDENTIFICATION:

(Left blank if standard)

AB26TRJ - Frequency - □ - □

### Load Capacitance

Please specify load cap.  
in pF (ex: 6pF)


Available: From 6 pF to Series

### Packaging

Blank	Bulk
T	Tape and Reel

## TUNING FORK CRYSTAL TEMPERATURE CURVE

Typical Frequency Stability vs. Temperature

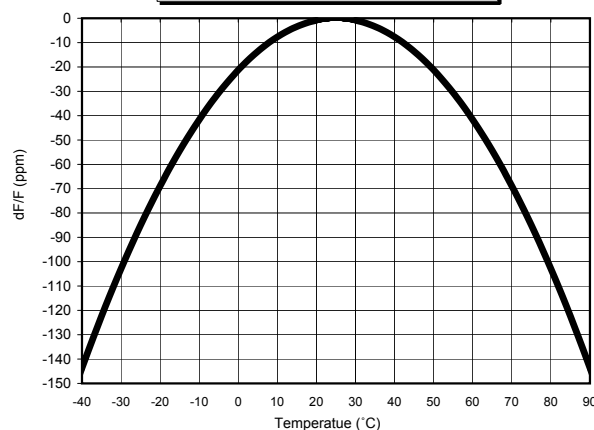

# LOW FREQUENCY REFLOWABLE CYLINDRICAL WATCH CRYSTAL




8.3 x 2.7mm


AB26TRJ

RoHS  
Compliant

## OUTLINE DRAWING:

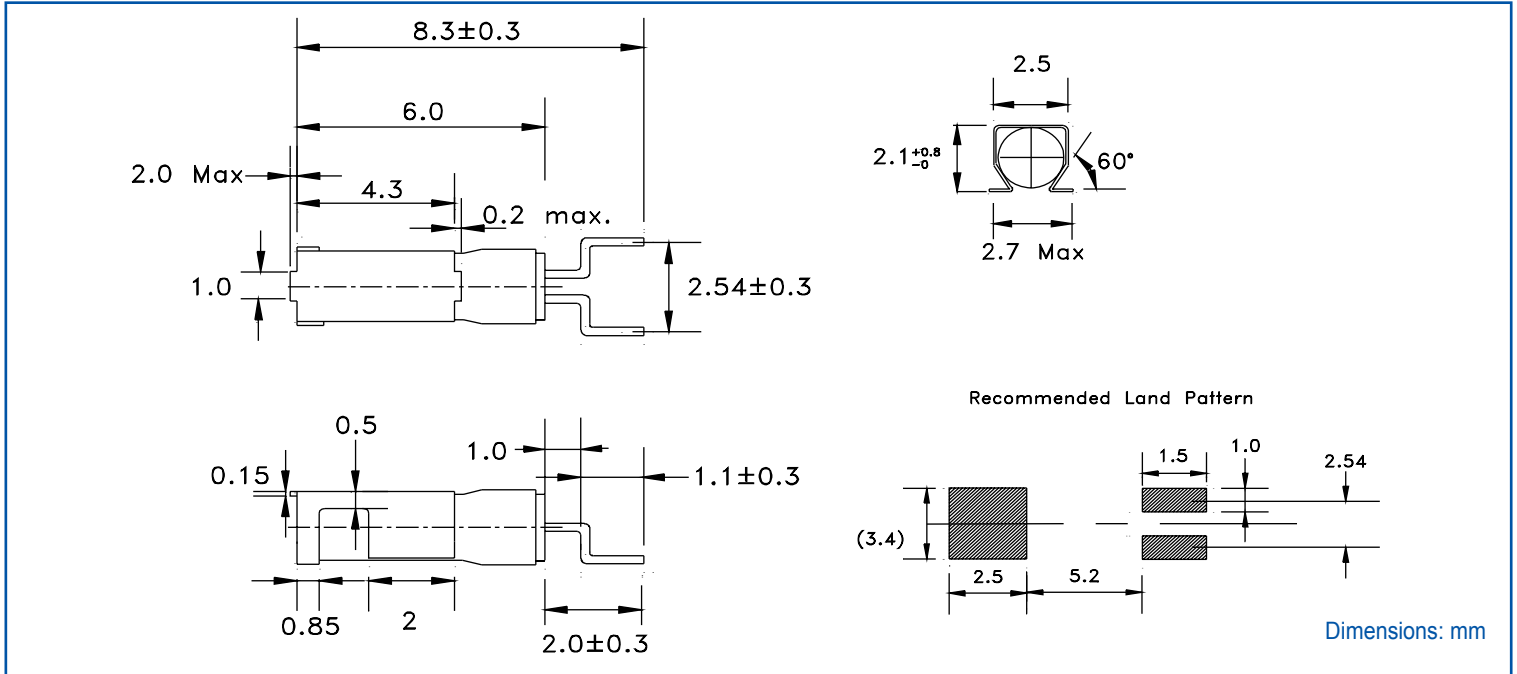

## TAPE & REEL: Tape and reel 3,000pcs/reel

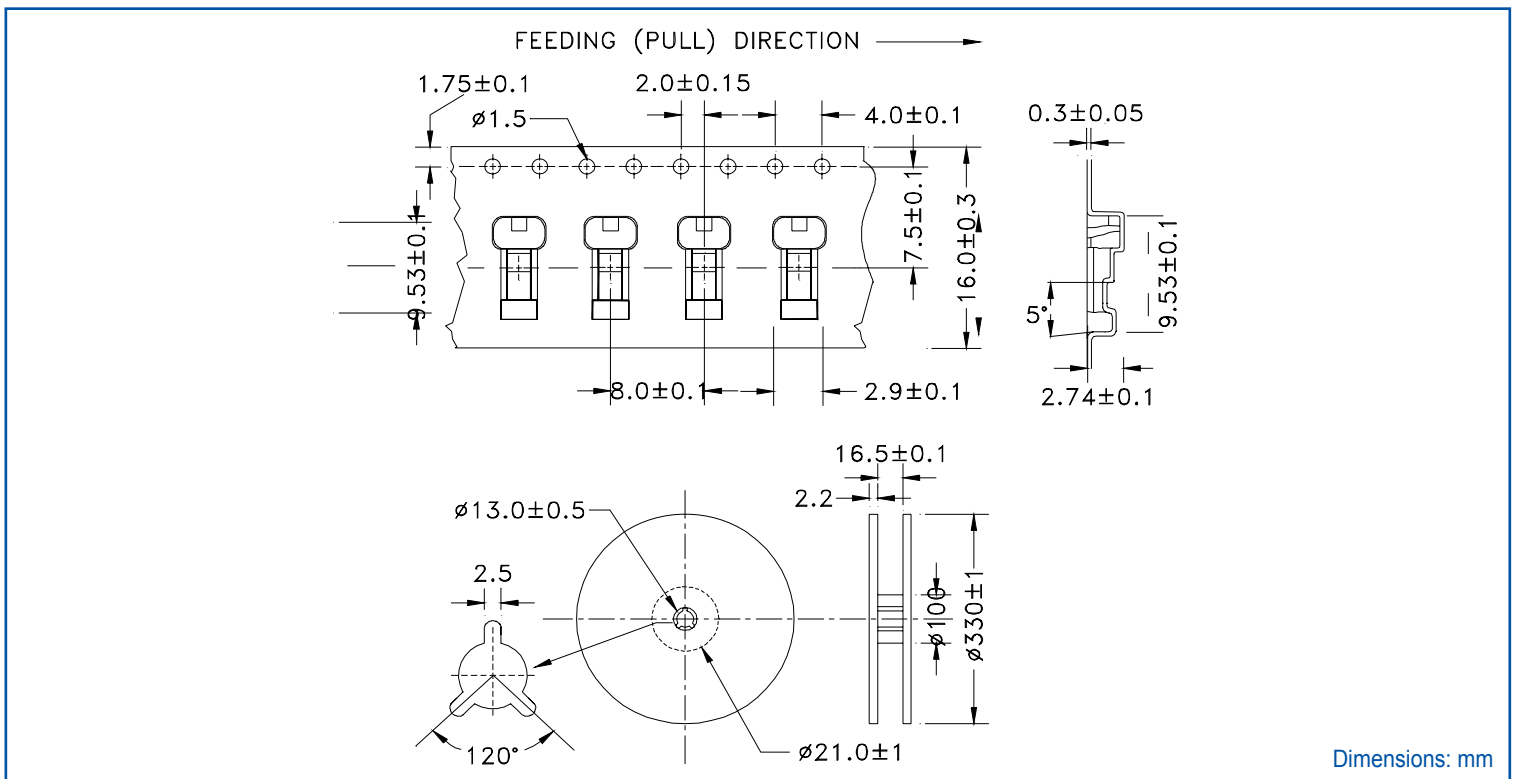

**ATTENTION:** Abracon Corporation's products are COTS – Commercial-Off-The-Shelf products; suitable for Commercial, Industrial and, where designated, Automotive Applications. Abracon's products are not specifically designed for Military, Aviation, Aerospace, Life-dependant Medical applications or any application requiring high reliability where component failure could result in loss of life and/or property. For applications requiring high reliability and/or presenting an extreme operating environment, written consent and authorization from Abracon Corporation is required. Please contact Abracon Corporation for more information.

ABRACON IS  
ISO9001:2008  
CERTIFIED



Visit [www.abracon.com](http://www.abracon.com) for Terms & Conditions of Sale **Revised: 06.29.10**  
30332 Esperanza, Rancho Santa Margarita, California 92688  
tel 949-546-8000 | fax 949-546-8001 | [www.abracon.com](http://www.abracon.com)

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Crystals category](#):*

*Click to view products by [ABRACON manufacturer](#):*

Other Similar products are found below :

[CS325S24000000ABJT](#) [718-13.2-1](#) [MC405 32.0000K-R3:PURE SN](#) [FC-135R 32.7680KF-A3](#) [7A-40.000MAAE-T](#) [7B-27.000MBBK-T](#)  
[FL2000085](#) [9B-15.360MBBK-B](#) [9C-7.680MBBK-T](#) [ASH7K-32.768KHZ](#) [AT-41.600MAGQ-T](#) [BTD1062E05A-513](#) [LFX TAL066198Cutt](#)  
[9C-14.31818MBBK-T](#) [FA-238 50.0000MB30X-K3](#) [FC-12M 32.7680KA-AC3](#) [SSPT7F-9PF20-R](#) [FX325BS-38.88EEM1201](#)  
[LFX TAL065253Cutt](#) [LFX TAL066431Cutt](#) [XT9S20ANA14M7456](#) [XT9SNLANA16M](#) [646G-24-2](#) [7A-24.576MBBK-T](#) [7B-30.000MBBK-T](#)  
[WX26-32.768K-6PF](#) [9B-14.31818MBBK-B](#) [CD1AM](#) [7B-25.000MAAE-T](#) [7A-14.31818MBBK-T](#) [6504-202-1501](#) [6526-202-1501](#) [FA-118T](#)  
[27.1200MB50P-K0](#) [FC-135R 32.7680KA-A3](#) [ABM12-104-37.400MHZT](#) [ABLS-10.000MHZ-D3W-T](#) [BTJ112E01E-513](#) [BTJ722K01C-7067](#)  
[BTL-20-513](#) [TSX-3225 24.0000MF15X-AC](#) [TSX-3225 16.0000MF18X-AC](#) [BTJ120E02C](#) [BTL-12-513](#) [7A-10.000MBBK-T](#) [7A-](#)  
[11.0592MBBK-T](#) [ABM12-103-24.000MHZT](#) [CS325S25000000ABJT](#) [ABM3B-25.000MHZ-B2-X-T](#) [FC-135 32.7680KA-A5](#) [FX0800015](#)