

mat'l. code		NOTE 1 & 3		surface		ISO 1302		tolerance		ISO 406		ISO 1101	
itr		ecn no		dr		date		tolerances unless otherwise specified		XX±.01/XX.03		XX±.01/XX.03	
B	REVISION	MRC	9/18/90	angles		indeg		XXXX+.005/XX±0.13		XXXX+.0020/XX±0.05		scale 2.5:1	
C	V71549	EPRK	11/13/97	0° ± .2°		E. KROPIEWINICKI		11/13/97		E		M05-0167	
D	V01541	MPF	6/27/00	0° ± .2°		MHT		8/01/07		F		M07-0150	
E	M05-0167	ERE	7/23/05	0° ± .2°		chr		11/13/97		G		M07-0150	
F	M07-0150	ACS	2/24/07	0° ± .2°		engr		11/13/97		H		M07-0150	
G	M07-0150	MHT	8/01/07	0° ± .2°		L. BREWBAKER		11/13/97		I		M07-0150	
sheet	revision	G	G	G	G	G	G	G	G	G	G	G	G
index	sheet	1	2	3	4	5	6	7	8	9	10	11	12


product family
projection

title
ROUND WIRE HEADER FOR
STRAIGHT HEADER FOR

type Product Customer Drawing
68663

sheet 1 of 6 size
A3

PRODUCT NUMBER
SEE TABLE

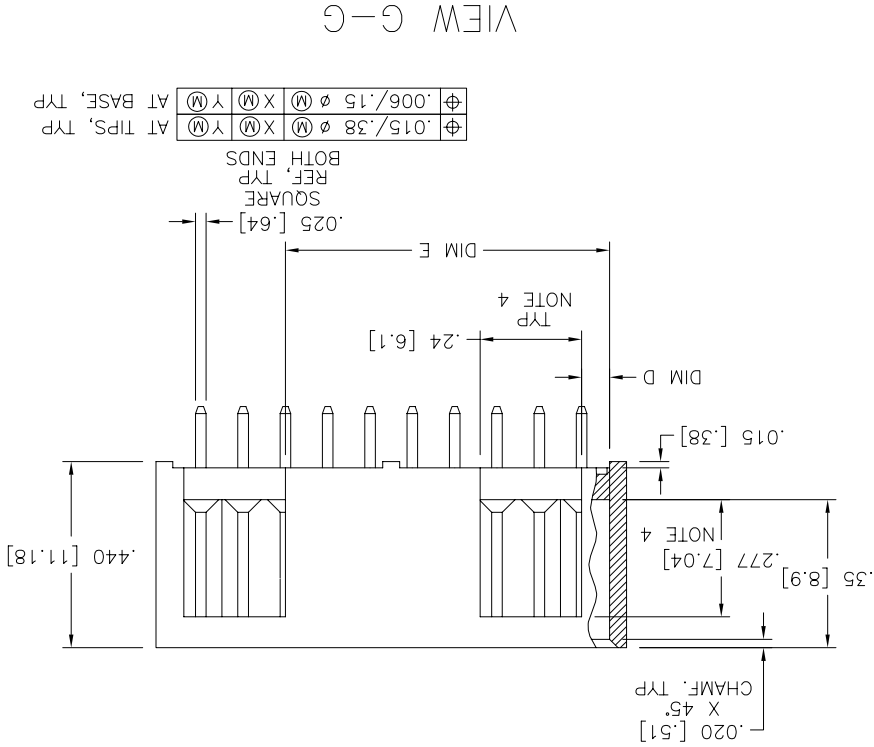

VIEW G-G

1. TERMINAL MATERIAL: 3/4 HARD PHOS. BRONZE ALLOY UNS-C51000.

2. TERMINAL PLATING: 15u"/0.38u Au OR GXT OVER 50u"/1.27u Ni PLATING ON SWAGED TIPS MANUFACTURERS OPTION.

3. MOLDING MATERIAL: GLASS FILLED POLYESTER, FLAME RETARDANT PER UL-94V-0. COLOR: BLACK

4. .020/0.51 MAX FLASH AROUND ALL WINDOWS.

5. COMPANY LOGO MOLDED IN A DATUM SURFACE -Z- APPROX. AS SHOWN.

6. .030/0.76 MAX FLASH PERMISSIBLE ON THIS END OF PINS.

7. OTHER PLATINGS ARE AVAILABLE ON 68664, 68665, AND 68666.

8. .015/0.38 MAX FLASH PERMISSIBLE ON THIS END OF PINS.

9. STANDARD PACKAGING IS TRAYS.

10. FOR TUBE PACKAGING, ADD SUFFIX "T" TO PART DASH NUMBER. EXAMPLE: 68663-XXXT.

11. PLATING OPTIONS: MAY BE EITHER GOLD OR GXT PLATED AT MANUFACTURER'S OPTION.

12. ADD "L" SUFFIX AT THE END OF PART NUMBER FOR LEAD FREE OPTION

13. THIS PRODUCT MEETS EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY REGULATION AS DESCRIBED IN GS-22-008.

14. THE HOUSING WILL WITHSTAND EXPOSURE TO 260°C PEAK TEMPERATURE FOR 15 SECONDS IN A WAVE SOLDER APPLICATION WITH A 1.5mm MINIMUM THICK CIRCUIT BOARD. SEE APPLICATION NOTES/PROCEDURES IF THEY ARE AVAILABLE.

mat'l. code		NOTE 1 & 3		ISO 1302		surface tolerance		ISO 406		ISO 1101		projection		product family	
G		angles		inclin		XXXX.005/XXXX.013		XXXX.01/XXXX.03		tolerances unless otherwise specified		title		STRAIGHT HEADER FOR ROUND WIRE RECEPTACLE	
ITR		ecn no		dr		date		XXXX.01/XXXX.03		scale 2.5:1		dwg no		sheet 2 of 6 size	
dr		E. KROPIWNIK		11/13/97								FCI		68663	
engr		L. FYE		11/13/97								type		Product Customer Drawing	
chr		T. BREWBAKER		11/13/97								revision		sheet	
sheet		revision										index		sheet	



PRODUCT NO	NO.OF	A	DIM B	DIM B	DIM C	DIM C	DIM D	DIM D	DIM E	DIM E	DIM F	DIM F	POL. POS
NOTE 12	POS	PINS	SPACES	ENGLISH	METRIC	ENGLISH	METRIC	ENGLISH	METRIC	ENGLISH	METRIC	ENGLISH	ROW A
ROW B													
68663-001	6	2	0.200	5.08	0.532	8.43	0.066	1.68	0.000	0.000	0.130	3.30	
68663-002	8	3	0.300	7.62	0.432	10.97	0.066	1.68	0.000	0.000	0.130	3.30	
68663-003	10	4	0.400	10.16	0.532	13.51	0.166	4.22	0.000	0.000	0.130	3.30	
68663-004	12	5	0.500	12.70	0.632	16.05	0.166	4.22	0.000	0.000	0.130	3.30	
68663-005	14	6	0.600	15.24	0.732	18.59	0.266	6.76	0.000	0.000	0.130	3.30	
68663-006	16	7	0.700	17.78	0.832	21.13	0.266	6.76	0.000	0.000	0.130	3.30	
68663-007	18	8	0.800	20.32	0.932	23.67	0.366	9.30	0.000	0.000	0.130	3.30	
68663-008	20	9	0.900	22.86	1.032	26.21	0.066	1.68	0.766	19.46	0.130	3.30	
68663-009	22	10	1.000	25.40	1.132	28.75	0.066	1.68	0.866	22.00	0.130	3.30	
68663-010	24	11	1.100	27.94	1.232	31.29	0.066	1.68	0.966	24.54	0.130	3.30	
68663-011	26	12	1.200	30.48	1.332	33.83	0.066	1.68	1.066	27.08	0.130	3.30	
68663-012	28	13	1.300	33.02	1.432	36.37	0.066	1.68	1.166	29.62	0.130	3.30	
68663-013	30	14	1.400	35.56	1.532	38.91	0.066	1.68	1.266	32.16	0.130	3.30	
68663-014	32	15	1.500	38.10	1.632	41.45	0.066	1.68	1.366	34.70	0.130	3.30	
68663-015	34	16	1.600	40.64	1.732	43.99	0.066	1.68	1.466	37.24	0.130	3.30	
68663-016	36	17	1.700	43.18	1.832	46.53	0.066	1.68	1.566	39.78	0.130	3.30	
68663-017	38	18	1.800	45.72	1.932	49.07	0.066	1.68	1.666	42.32	0.130	3.30	
68663-018	40	19	1.900	48.26	2.032	51.61	0.066	1.68	1.766	44.86	0.130	3.30	
68663-019	42	20	2.000	50.80	2.132	54.15	0.066	1.68	1.866	47.40	0.130	3.30	
68663-020	44	21	2.100	53.34	2.232	56.69	0.066	1.68	1.966	49.94	0.130	3.30	
68663-021	46	22	2.200	55.88	2.332	59.23	0.066	1.68	2.066	52.48	0.130	3.30	
68663-022	48	23	2.300	58.42	2.432	61.77	0.066	1.68	2.166	55.02	0.130	3.30	
68663-023	50	24	2.400	60.96	2.532	64.31	0.066	1.68	2.266	57.56	0.130	3.30	
68663-024	52	25	2.500	63.50	2.632	66.85	0.066	1.68	2.366	60.10	0.130	3.30	
68663-025	54	26	2.600	66.04	2.732	69.39	0.066	1.68	2.466	62.64	0.130	3.30	
68663-026	56	27	2.700	68.58	2.832	71.93	0.066	1.68	2.566	65.18	0.130	3.30	
68663-027	58	28	2.800	71.12	2.932	74.47	0.066	1.68	2.666	67.72	0.130	3.30	
68663-028	60	29	2.900	73.66	3.032	77.01	0.066	1.68	2.766	70.26	0.130	3.30	
68663-029	62	30	3.000	76.20	3.132	79.55	0.066	1.68	2.866	72.80	0.130	3.30	
68663-030	64	31	3.100	78.74	3.232	82.09	0.066	1.68	2.966	75.34	0.130	3.30	
68663-031	66	32	3.200	81.28	3.332	84.63	0.066	1.68	3.066	77.88	0.130	3.30	
68663-032	68	33	3.300	83.82	3.432	87.17	0.066	1.68	3.166	80.42	0.130	3.30	
68663-033	70	34	3.400	86.36	3.532	89.71	0.066	1.68	3.266	82.96	0.130	3.30	
68663-034	72	35	3.500	88.90	3.632	92.25	0.066	1.68	3.366	85.50	0.130	3.30	

REAR SLOT VIEW G-G

mtrl. code		NOTE 1 & 3		ISO 1302		surface tolerance		ISO 1101		ISO 406		projection		product family	
date		tolerances unless otherwise specified		XX.X01/XX.03		INCH/MM		XX.X01/XX.03		scale 2.5:1		title		product family	
angles		indeg		XXX.X002/XXX.X013		INCH/MM		XX.X01/XX.03		scale 2.5:1		title		product family	
0 ±.2		indeg		XXX.X002/XXX.X013		INCH/MM		XX.X01/XX.03		scale 2.5:1		title		product family	
dr		E. KROPFENINICK11/13/97		engr		L. FYE		11/13/97		chr		T. BREWBAKER11/13/97		sheet	
revision		sheet		revision		sheet		revision		sheet		revision		sheet	
index		sheet		index		sheet		index		sheet		index		sheet	
type		Product Customer Drawing		type		Product Customer Drawing		type		Product Customer Drawing		type		Product Customer Drawing	
68663		68663		68663		68663		68663		68663		68663		68663	
A3		A3		A3		A3		A3		A3		A3		A3	



PRODUCT NO	NO.OF	A	DIM B	DIM B	DIM C	DIM C	DIM D	DIM D	DIM E	DIM E	DIM F	DIM F	POL. POS
NOTE 12	POS	PINS	SPACES	ENGLISH	METRIC	ENGLISH	METRIC	ENGLISH	METRIC	ENGLISH	METRIC	ENGLISH	ROW A
ROW B	ENGLISH	METRIC	ENGLISH	METRIC	ENGLISH	METRIC	ENGLISH	METRIC	ENGLISH	METRIC	ENGLISH	METRIC	ROW B
68863-035	6	6	2	0.200	5.08	0.332	8.43	0.066	1.68	0.000	0.000	0.155	3.94
68863-036	8	8	3	0.300	7.62	0.432	10.97	0.066	1.68	0.000	0.000	0.155	3.94
68863-037	10	10	4	0.400	10.16	0.532	13.51	0.166	4.22	0.000	0.000	0.155	3.94
68863-038	12	12	5	0.500	12.70	0.632	16.05	0.166	4.22	0.000	0.000	0.155	3.94
68863-039	14	14	6	0.600	15.24	0.732	18.59	0.266	6.76	0.000	0.000	0.155	3.94
68863-040	16	16	7	0.700	17.78	0.832	21.13	0.266	6.76	0.000	0.000	0.155	3.94
68863-041	18	18	8	0.800	20.32	0.932	23.67	0.366	9.30	0.000	0.000	0.155	3.94
68863-042	20	20	9	0.900	22.86	1.032	26.21	0.066	1.68	0.766	19.46	0.155	3.94
68863-043	22	22	10	1.000	25.40	1.132	28.75	0.066	1.68	0.866	22.00	0.155	3.94
68863-044	24	24	11	1.100	27.94	1.232	31.29	0.066	1.68	0.966	24.54	0.155	3.94
68863-045	26	26	12	1.200	30.48	1.332	33.83	0.066	1.68	1.066	27.08	0.155	3.94
68863-046	28	28	13	1.300	33.02	1.432	36.37	0.066	1.68	1.166	29.62	0.155	3.94
68863-047	30	30	14	1.400	35.56	1.532	38.91	0.066	1.68	1.266	32.16	0.155	3.94
68863-048	32	32	15	1.500	38.10	1.632	41.45	0.066	1.68	1.366	34.70	0.155	3.94
68863-049	34	34	16	1.600	40.64	1.732	43.99	0.066	1.68	1.466	37.24	0.155	3.94
68863-050	36	36	17	1.700	43.18	1.832	46.53	0.066	1.68	1.566	39.78	0.155	3.94
68863-051	38	38	18	1.800	45.72	1.932	49.07	0.066	1.68	1.666	42.32	0.155	3.94
68863-052	40	40	19	1.900	48.26	2.032	51.61	0.066	1.68	1.766	44.86	0.155	3.94
68863-053	42	42	20	2.000	50.80	2.132	54.15	0.066	1.68	1.866	47.40	0.155	3.94
68863-054	44	44	21	2.100	53.34	2.232	56.69	0.066	1.68	1.966	49.94	0.155	3.94
68863-055	46	46	22	2.200	55.88	2.332	59.23	0.066	1.68	2.066	52.48	0.155	3.94
68863-056	48	48	23	2.300	58.42	2.432	61.77	0.066	1.68	2.166	55.02	0.155	3.94
68863-057	50	50	24	2.400	60.96	2.532	64.31	0.066	1.68	2.266	57.56	0.155	3.94
68863-058	52	52	25	2.500	63.50	2.632	66.85	0.066	1.68	2.366	60.10	0.155	3.94
68863-059	54	54	26	2.600	66.04	2.732	69.39	0.066	1.68	2.466	62.64	0.155	3.94
68863-060	56	56	27	2.700	68.58	2.832	71.93	0.066	1.68	2.566	65.18	0.155	3.94
68863-061	58	58	28	2.800	71.12	2.932	74.47	0.066	1.68	2.666	67.72	0.155	3.94
68863-062	60	60	29	2.900	73.66	3.032	77.01	0.066	1.68	2.766	70.26	0.155	3.94
68863-063	62	62	30	3.000	76.20	3.132	79.55	0.066	1.68	2.866	72.80	0.155	3.94
68863-064	64	64	31	3.100	78.74	3.232	82.09	0.066	1.68	2.966	75.34	0.155	3.94
68863-065	66	66	32	3.200	81.28	3.332	84.63	0.066	1.68	3.066	77.88	0.155	3.94
68863-066	68	68	33	3.300	83.82	3.432	87.17	0.066	1.68	3.166	80.42	0.155	3.94
68863-067	70	70	34	3.400	86.36	3.532	89.71	0.066	1.68	3.266	82.96	0.155	3.94
68863-068	72	72	35	3.500	88.90	3.632	92.25	0.066	1.68	3.366	85.50	0.155	3.94

mat'l. code NOTE 1 & 3
 surface ISO 1302
 tolerance ISO 406
 ISO 1101
 projection
 product family HEADER
 title
 INCH/MM
 scale 2.5:1
 STRAIGHT HEADER FOR
 ROUND WIRE RECEPTACLE
 product family
 drawing no 68863
 sheet 4 of 6 size A3
 type Product Customer Drawing
 sheet revision
 index sheet

6 5 4 3 2 1 A B C D

PRODUCT NO		NO.OF		A		DIM B		DIM B		DIM C		DIM C		DIM D		DIM D		DIM E		DIM E		DIM F		DIM F	
NOTE 12	POS	PINS	SPACES	ENGLISH	METRIC	ENGLISH	METRIC	ENGLISH	METRIC	ENGLISH	METRIC	ENGLISH	METRIC	ENGLISH	METRIC	ENGLISH	METRIC	ENGLISH	METRIC	ENGLISH	METRIC	ENGLISH	METRIC	ENGLISH	METRIC
68663-069	6	2	0.200	5.08	0.332	8.43	0.066	1.68	0.000	0.000	0.000	0.200	5.08	---	---	---	---	---	---	---	---	---	---	---	
68663-070	8	3	0.300	7.62	0.432	10.97	0.066	1.68	0.000	0.000	0.000	0.200	5.08	---	---	---	---	---	---	---	---	---	---	---	
68663-071	10	4	0.400	10.16	0.532	13.51	0.166	4.22	0.000	0.000	0.000	0.200	5.08	---	---	---	---	---	---	---	---	---	---	---	
68663-072	12	5	0.500	12.70	0.632	16.05	0.166	4.22	0.000	0.000	0.000	0.200	5.08	---	---	---	---	---	---	---	---	---	---	---	
68663-073	14	6	0.600	15.24	0.732	18.59	0.266	6.76	0.000	0.000	0.000	0.200	5.08	---	---	---	---	---	---	---	---	---	---	---	
68663-074	16	7	0.700	17.78	0.832	21.13	0.266	6.76	0.000	0.000	0.000	0.200	5.08	---	---	---	---	---	---	---	---	---	---	---	
68663-075	18	8	0.800	20.32	0.932	23.67	0.366	9.30	0.000	0.000	0.000	0.200	5.08	---	---	---	---	---	---	---	---	---	---	---	
68663-076	20	9	0.900	22.86	1.032	26.21	0.066	1.68	0.766	19.46	0.200	5.08	---	---	---	---	---	---	---	---	---	---	---	---	
68663-077	22	10	1.000	25.40	1.132	28.75	0.066	1.68	0.866	22.00	0.200	5.08	---	---	---	---	---	---	---	---	---	---	---	---	
68663-078	24	11	1.100	27.94	1.232	31.29	0.066	1.68	0.966	24.54	0.200	5.08	---	---	---	---	---	---	---	---	---	---	---	---	
68663-079	26	12	1.200	30.48	1.332	33.83	0.066	1.68	1.066	27.08	0.200	5.08	---	---	---	---	---	---	---	---	---	---	---	---	
68663-080	28	13	1.300	33.02	1.432	36.37	0.066	1.68	1.166	29.62	0.200	5.08	---	---	---	---	---	---	---	---	---	---	---	---	
68663-081	30	14	1.400	35.56	1.532	38.91	0.066	1.68	1.266	32.16	0.200	5.08	---	---	---	---	---	---	---	---	---	---	---	---	
68663-082	32	15	1.500	38.10	1.632	41.45	0.066	1.68	1.366	34.70	0.200	5.08	---	---	---	---	---	---	---	---	---	---	---	---	
68663-083	34	16	1.600	40.64	1.732	43.99	0.066	1.68	1.466	37.24	0.200	5.08	---	---	---	---	---	---	---	---	---	---	---	---	
68663-084	36	17	1.700	43.18	1.832	46.53	0.066	1.68	1.566	39.78	0.200	5.08	---	---	---	---	---	---	---	---	---	---	---	---	
68663-085	38	18	1.800	45.72	1.932	49.07	0.066	1.68	1.666	42.32	0.200	5.08	---	---	---	---	---	---	---	---	---	---	---	---	
68663-086	40	19	1.900	48.26	2.032	51.61	0.066	1.68	1.766	44.86	0.200	5.08	---	---	---	---	---	---	---	---	---	---	---	---	
68663-087	42	20	2.000	50.80	2.132	54.15	0.066	1.68	1.866	47.40	0.200	5.08	---	---	---	---	---	---	---	---	---	---	---	---	
68663-088	44	21	2.100	53.34	2.232	56.69	0.066	1.68	1.966	49.94	0.200	5.08	---	---	---	---	---	---	---	---	---	---	---	---	
68663-089	46	22	2.200	55.88	2.332	59.23	0.066	1.68	2.066	52.48	0.200	5.08	---	---	---	---	---	---	---	---	---	---	---	---	
68663-090	48	23	2.300	58.42	2.432	61.77	0.066	1.68	2.166	55.02	0.200	5.08	---	---	---	---	---	---	---	---	---	---	---	---	
68663-091	50	24	2.400	60.96	2.532	64.31	0.066	1.68	2.266	57.56	0.200	5.08	---	---	---	---	---	---	---	---	---	---	---	---	
68663-092	52	25	2.500	63.50	2.632	66.85	0.066	1.68	2.366	60.10	0.200	5.08	---	---	---	---	---	---	---	---	---	---	---	---	
68663-093	54	26	2.600	66.04	2.732	69.39	0.066	1.68	2.466	62.64	0.200	5.08	---	---	---	---	---	---	---	---	---	---	---	---	
68663-094	56	27	2.700	68.58	2.832	71.93	0.066	1.68	2.566	65.18	0.200	5.08	---	---	---	---	---	---	---	---	---	---	---	---	
68663-095	58	28	2.800	71.12	2.932	74.47	0.066	1.68	2.666	67.72	0.200	5.08	---	---	---	---	---	---	---	---	---	---	---	---	
68663-096	60	29	2.900	73.66	3.032	77.01	0.066	1.68	2.766	70.26	0.200	5.08	---	---	---	---	---	---	---	---	---	---	---	---	
68663-097	62	30	3.000	76.20	3.132	79.55	0.066	1.68	2.866	72.80	0.200	5.08	---	---	---	---	---	---	---	---	---	---	---	---	
68663-098	64	31	3.100	78.74	3.232	82.09	0.066	1.68	2.966	75.34	0.200	5.08	---	---	---	---	---	---	---	---	---	---	---	---	
68663-099	66	32	3.200	81.28	3.332	84.63	0.066	1.68	3.066	77.88	0.200	5.08	---	---	---	---	---	---	---	---	---	---	---	---	
68663-100	68	33	3.300	83.82	3.432	87.17	0.066	1.68	3.166	80.42	0.200	5.08	---	---	---	---	---	---	---	---	---	---	---	---	
68663-101	70	34	3.400	86.36	3.532	89.71	0.066	1.68	3.266	82.96	0.200	5.08	---	---	---	---	---	---	---	---	---	---	---	---	
68663-102	72	35	3.500	88.90	3.632	92.25	0.066	1.68	3.366	85.50	0.200	5.08	---	---	---	---	---	---	---	---	---	---	---	---	

REAR SLOT VIEW G-C

mat'l code		NOTE 1 & 3		surface		ISO 1302		tolerance		ISO 406		ISO 1101		projection		product family		HEADER		title		INCH/MM		scale 2.5:1		STRAIGHT HEADER FOR		ROUND WIRE RECEPTACLE		sheets of 6 size		68663		A3		type		Product Customer Drawing					
ITR		ecn no		dr		date		tolerances unless otherwise specified		XX.X01/XX.03		XX.X002/XX.X013		XX.X002/XX.X013		dr		E. KROPIWNIK1/13/97		engr		L. FYE		11/13/97		chr		T. BREWBAKER1/13/97		pppd		L. FYE		11/13/97		sheet		revision		index		sheet	

PRODUCT NO	NO.OF	A	DIM B	DIM B	DIM C	DIM C	DIM D	DIM D	DIM D	DIM E	DIM E	DIM F	DIM F	POL. POS
NOTE 12	POS	POS	SPACES	ENGLISH	ENGLISH	ENGLISH	METRIC	ENGLISH	METRIC	ENGLISH	METRIC	ENGLISH	METRIC	ROW A
88663-103	6	6	2	0.200	5.08	0.332	8.43	0.066	1.68	0.000	0.000	0.380	9.65	-----
88663-104	8	8	3	0.300	7.62	0.432	10.97	0.066	1.68	0.000	0.000	0.380	9.65	-----
88663-105	12	12	5	0.500	12.70	0.632	16.05	0.166	4.22	0.000	0.000	0.380	9.65	-----
88663-106	16	16	7	0.700	17.78	0.832	21.13	0.266	6.76	0.000	0.000	0.380	9.65	-----
88663-107	20	20	9	0.900	22.86	1.032	26.21	0.066	1.68	0.766	19.46	0.380	9.65	-----
88663-108	14	13	6	0.600	15.24	0.732	18.59	0.266	6.76	---	---	0.130	3.30	-----
88663-132	32	32	15	1.500	38.10	1.632	41.45	.066	1.68	1.366	34.70	.325	8.26	-----

REAR SLOT VIEW G-G

mat'l. code		NOTE 1 & 3		ISO 1302		tolerance		ISO 1101		ISO 406		projection		product family		HEADER			
itr		ecn no		dr		date		tolerances unless otherwise specified		XX#.01/XX#.03		INCH/MM		title		STRAIGHT HEADER FOR			
g		angles		indeg		.0004, .0005/XX#.013		.0004, .0005/XX#.05		scale 2.5:1		dwg no		sheets of 6 size		ROUND WIRE RECEPTACLE			
sheet		revision		ppd		L. FYE		11/13/97		engr		L. FYE		11/13/97		chr		T. BREWBAKER	
index		sheet		L. FYE		11/13/97		dr		E. KROPFENICK		11/13/97		type		Product Customer Drawing			

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Headers & Wire Housings](#) category:

Click to view products by [Amphenol](#) manufacturer:

Other Similar products are found below :

[95000-104TRLF](#) [10135584-644402LF](#) [DF62W-EP2022PCA](#) [95000-106TRLF](#) [DF62W-2022SCA](#) [DF62W-EP2022PC](#) [2203348](#) [DF62W-2022SC](#) [1084018](#) [1029039](#) [1084017](#) [802-10-012-10-002000](#) [1112640](#) [1112639](#) [891-007-9SS-BST1T](#) [000-34000](#) [0008550134](#) [0009482033](#) [0009507031](#) [57102-F02-18ULF](#) [57102-S06-03LF](#) [57202-S52-04LF](#) [PCN6-15S-2.5E](#) [0039019024](#) [58102-G61-06LF](#) [582553-1](#) [0009485154](#) [0009508121](#) [009176003701906](#) [0022285053](#) [0050291907](#) [018731A](#) [LY20-4P-DT1-P1E-BR](#) [02.125.8002.8](#) [60101931](#) [60598-1 \(Cut Strip\)](#) [M1625-3R/100](#) [61062-3](#) [61082-181009](#) [CSU011177004](#) [636-1427](#) [638009-1](#) [641938-9](#) [641991-4](#) [644168-1](#) [644827-2](#) [647662-1](#) [65039-019ELF](#) [65692-001LF](#) [65781-018](#)