



■ Features :


- 2:1 wide input range
- 1000VDC I/O isolation
- Built-in remote ON/OFF control
- Built-in EMI filter
- Protections: Short circuit / Overload
- Cooling by free air convection
- Single in line package
- 100% full load burn-in test
- Low cost / High reliability
- Modified models available: output 3.3V/9V
- 2 years warranty



SPECIFICATION

ORDER NO.		SPB03E-05	SPB03A-05	SPB03B-05	SPB03C-05	SPB03E-12	SPB03A-12	SPB03B-12	SPB03C-12	SPB03E-15	SPB03A-15	SPB03B-15	SPB03C-15	
OUTPUT	DC VOLTAGE	5V				12V				15V				
	CURRENT RANGE	60 ~ 600mA				25 ~ 250mA				20 ~ 200mA				
	RATED POWER	3W												
	RIPPLE & NOISE (max.) Note.2	50mVp-p				60mVp-p				60mVp-p				
	LINE REGULATION Note.3	±0.5%												
	LOAD REGULATION Note.4	±0.5%												
	VOLTAGE ACCURACY	±2.0%												
	SWITCHING FREQUENCY	100KHz min.												
INPUT	VOLTAGE RANGE	E: 4.5 ~ 9VDC A: 9 ~ 18VDC B: 18 ~ 36VDC C: 36 ~ 72VDC												
	EFFICIENCY (Typ.)	74%	73%	77%	78%	76%	80%	80%	79%	75%	80%	80%	82%	
	DC CURRENT	Full load	E: 810mA A: 340mA B: 165mA C: 85mA											
		No load	E: 110mA A: 40mA B: 20mA C: 10mA											
	FILTER	Pi network												
PROTECTION	Fuse recommended													
PROTECTION (Note. 5)	OVERLOAD	150 ~ 250% rated output power Protection type : Hiccup mode, recovers automatically after fault condition is removed												
	SHORT CIRCUIT	All output equipped with short circuit Protection type : Hiccup mode, recovers automatically after fault condition is removed												
ENVIRONMENT	WORKING TEMP.	-40 ~ +85°C (Refer to output load derating curve)												
	WORKING HUMIDITY	20% ~ 90% RH non-condensing												
	STORAGE TEMP., HUMIDITY	-40 ~ +105°C, 10 ~ 95% RH												
	TEMP. COEFFICIENT	±0.05% / °C (0 ~ 50°C)												
	VIBRATION	10 ~ 500Hz, 2G 10min./1 cycle, period for 60min. each along X, Y, Z axes												
SAFETY	WITHSTAND VOLTAGE	I/P-O/P:1KVDC												
	ISOLATION RESISTANCE	I/P-O/P: 100M Ohms / 500VDC / 25°C / 70% RH												
	ISOLATION CAPACITANCE	80pF max.												
	EMC EMISSION	Compliance to EN55022 Class B, FCC part 15 Class B												
	EMC IMMUNITY	Compliance to EN61000-4-2,3,4,5,6,8 light industry level, criteria A												
OTHERS	REMOTE CONTROL	Power ON : R.C. ~ +Vin < 1VDC or open ; Power OFF : R.C. ~ +Vin > 4VDC or short												
	MTBF	600Khrs min. MIL-HDBK-217F(25°C)												
	DIMENSION	21.8*9.2*11.1mm or 0.86**0.36**0.44" inch (L*W*H)												
	WEIGHT	4.8g												


■ Mechanical Specification

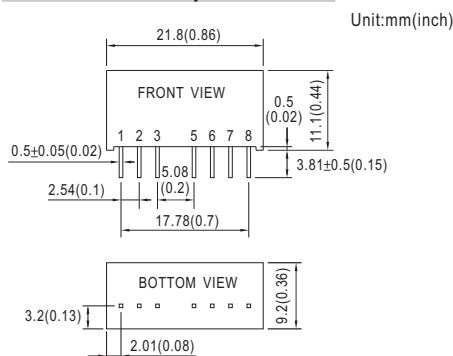

■ Pin Configuration

Pin No.	Output
1	-Vin
2	+Vin
3	R.C.
5	N.C.
6	+Vout
7	-Vout
8	N.C.

■ Derating Curve

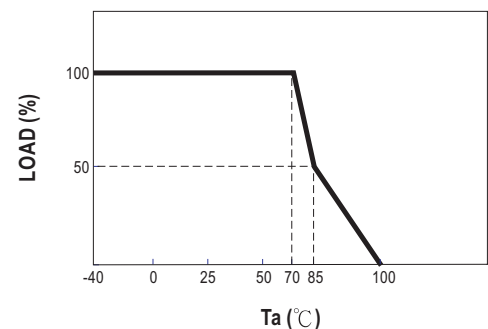

NOTE

- 1.All parameters are specified at normal input, rated load, 25°C 70% RH ambient.
- 2.Ripple & noise are measured at 20MHz by using a 12" twisted pair terminated with a 0.1uf & 47uf capacitor.
- 3.Line regulation is measured from low line to high line at rated load.
- 4.Load regulation is measured from 10% to 100% rated load.
- 5.Please prevent the converter from operating in overload or short circuit condition for more than 30 seconds.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Isolated DC/DC Converters](#) category:

Click to view products by [Mean Well](#) manufacturer:

Other Similar products are found below :

[ESM6D044440C05AAQ](#) [FMD15.24G](#) [PSL486-7LR](#) [PSR152.5-7IR](#) [Q48T30020-NBB0](#) [AVO240-48S12B-6L](#) [AVO250-48S28B-6L](#) [NAN-0505](#) [HW-L16D](#) [JAHW100Y1](#) [217-1617-001](#) [22827](#) [SPB05C-12](#) [SQ24S15033-PS0S](#) [18952](#) [19-130041](#) [CE-1003](#) [CE-1004](#) [GQ2541-7R](#) [PSE1000DCDC-12V](#) [RDS180245](#) [MAU228](#) [419-2065-201](#) [449-2075-101](#) [TME 0303S](#) [TME 0505S](#) [TME 1205S](#) [TME 1212S](#) [TME 2405S](#) [TME 2412S](#) [V300C24C150BG](#) [419-2062-200](#) [419-2063-401](#) [419-2067-101](#) [419-2067-501](#) [419-2068-001](#) [DCG40-5G](#) [DFC15U48D15](#) [449-2067-000](#) [XGS-0512](#) [XGS-1205](#) [XGS-1212](#) [XGS-2412](#) [XGS-2415](#) [XKS-1215](#) [033456](#) [NCT1000N040R050B](#) [SPB05B-15](#) [SPB05C-15](#) [TME 0509S](#)