

长园电子（集团）有限公司
上海长园电子材料有限公司

Changyuan Electronics Group CO.,LTD Shanghai
Changyuan Electronic Material Co.,Ltd.

承 认 书
CERTIFICATION

客户名称： Customer Name:		产品名称：编织网纹管 Products Name: PET braid Expandable sleeving		
承认规格：系列产品 Products Range: series		颜色：黑、灰 Standard :Black、Gray		
产品型号：CYG-PETN Products Type: CYG-PETN				
客 户 签 章	核 准 Approve	复 核 Re-Check	审 核 Check	主 办 Charge
	日 期 Date	日 期 Date	日 期 Date	日 期 Date

地址：广东省东莞大朗镇富民工业二园宝陂工业区 邮编(P.C.):523770
Add: Baopi Industrial District, Fumin Industrial Park 2#,Dalang Town, Dongguan, China
电话 (Tel) : 0769-89619666 传真 (Fax) : 0769-89388002 地址：上海市嘉定区嘉
好路 1690 号 邮编 (P.C.) : 201802

Add: No.1690, Jiahao Road, Nanxiang Town, Jiading, Shanghai, China

电话 (Tel) : 021-69978846, 69978839

传真 (Fax) : 021-69978838

一. 编织网纹管规格表 (Size & selection)



Material: polyester(PET)
 Working temperature range:-30°C~150°C
 Flammability: 5 seconds self-extinguishing (UL94 V-1)
 Colour: Black、Gray
 Melting point: 250°C
 Self-fitting over many shapes and sizes
 Fray resistant
 Approval: RoHS

Note	Part No.	Cable range (mm)	Note	Part No.	Cable range (mm)
16#	16*3*0.20-13	3.0~4.0	56#	56*3*0.20-8	15.0~22.0
	16*3*0.20-15	2.5~3.5		56*3*0.20-10	14.0~21.0
24#	24*3*0.20-10	5.0~10.0	72#	56*3*0.25-8	17.0~28.0
	24*3*0.20-11	4.8~9.0		72*1*0.25-10	8.0~26.0
	24*3*0.20-13	4.5~8.0		72*3*0.20-8	18.0~36.0
	24*3*0.25-10	6.0~12.0		72*3*0.25-7	25.0~32.0
32#	32*1*0.20-13	3.0~9.0		72*3*0.25-9	24.0~30.0
	32*3*0.20-9	7.0~14.0		72*3*0.30-8	22.0~30.0
	32*3*0.20-11	9.0~15.0	72*4*0.25-6	26.0~38.0	
	32*3*0.25-9	6.5~13.0	96#	96*3*0.20-7	25.0~55.0
36#	36*1*0.20-13	4.5~8.0		96*3*0.20-10	24.0~54.0
	36*3*0.25-8	10.0~15.0		96*3*0.25-7	31.0~46.0
40#	40*3*0.20-8	8.0~18.0		96*3*0.25-8	30.0~45.0
	40*3*0.25-8	10.0~16.0		96*4*0.20-7	34.0~46.0
	40*3*0.25-9	9.5~15.5	96*4*0.20-8	30.0~45.0	
48#	48*1*0.20-13	4.0~13.0	120#	96*4*0.25-7	40.0~60.0
	48*1*0.25-13	5.0~12.0		120*2/3*0.25-9	35.0~65.0
	48*3*0.20-8	10.0~20.0		120*3*0.25-9	36.0~70.0
	48*3*0.20-9	9.8~19.0		120*4*0.20-7	40.0~70.0
	48*3*0.20-10	9.5~18.0		120*4*0.25-6	50.0~70.0
	48*3*0.20-12	9.0~17.0	120*5*0.20-6	45.0~75.0	
	48*3*0.25-8	13.0~22.0	148#	148*6*0.25-6	80.0~100.0

Note: Product selection

The product is determined by the four groups of parameters, Stated below

48 * 3 * 25 - 08

A B C D


A: number of spindles (指编织锭数,以上是 48 锭)

B: number of monofilament per spindles (每锭的丝数 以上为 3 丝)

C: diameter of monofilament (指丝的直径乘以 100, 以上丝的直径是 0.25mm)

D: Per inch mesh (Secondary parameters) (指的是编织密度, 每英寸的长度, 一条线上的编织交叉点的个数, 以上是 8 个)

二.编织网管工程图纸 (Engineering Picture of PETN)

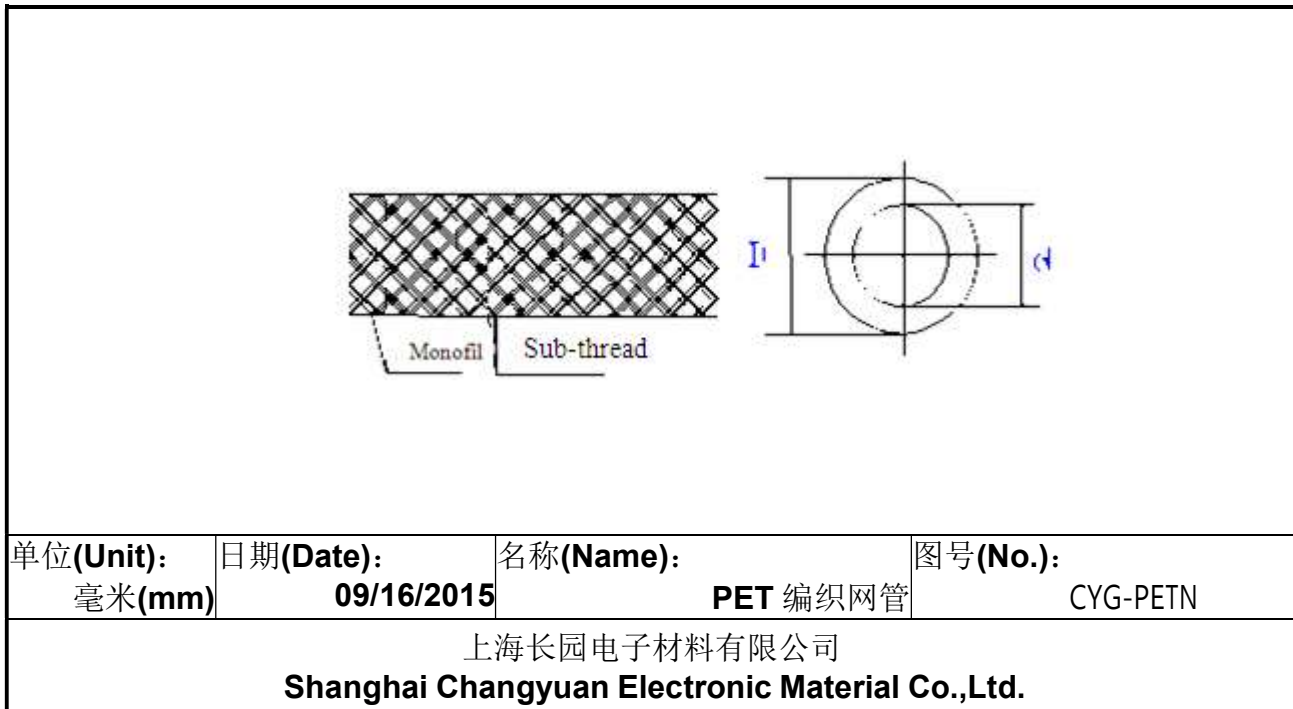

材质证明 Material certificate

Our PET braided sleeving is environmentally friendly and also expandable. It's main material is Polyethylene terephthalate resin and with some additives. The amount Pb、Hg、PBB、PBDE meet the standard of RoHs. Below are ingredient list

原料名称 raw material			使用目的 purpose	含量	CAS.No
中文	ENGLISH	分子式 Molecular formula			
聚对苯二甲酸 乙二醇酯树脂	PET	(CH ₂ -CH ₂ -COOphCOO) n	Main ingredient	88 %	25038-59-9
磷酸酯	Mp	P _m N _n H _x O	fire retardant	10
色母	Pigment	colorant	2



上海长园电子材料有限公司
Shanghai Changyuan Electronic Material Co.,Ltd.
2015-09-16

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Non-Heat Shrink Tubing and Sleeves](#) category:

Click to view products by [CYG](#) manufacturer:

Other Similar products are found below :

[CTA-0053](#) [8429-9](#) [8445-7.5](#) [8450](#) [120-116-1-1-09BE](#) [120-116-1-1-09BF](#) [120-116-1-1-09BP](#) [120-116-1-1-12BE](#) [120-116-1-1-12BP](#) [120-123-06](#) [120-123-10](#) [120-125-12BL](#) [120-125-12R](#) [120-125-20R](#) [120-126-09](#) [120-126-09BL](#) [120-126-12](#) [120-126-12BL](#) [120-126-52](#) [120-126-52BL](#) [120-104-12](#) [120-105-1-1-06BE](#) [120-105-1-1-06CE](#) [120-116-1-1-06BP](#) [120-116-1-1-10BP](#) [120-116-1-1-12BF](#) [120-123-12](#) [120-125-09](#) [120-125-12](#) [120-125-12Y](#) [120-125-52BL](#) [120-S002-12](#) [HC1B-7008-0375-0](#) [120-S001-09](#) [120-S002-09](#) [121-101-1-1-56BFC](#) [121-101-1-1-64BFC](#) [RAY-90-3.0\(100\)](#) [20675-2](#) [8S42-100FR-CS8184](#) [SAS-115-1-1048-1X](#) [SAS-160-1-1048-1X](#) [25T-GB](#) [RAY-103-10.0\(100\)](#) [RAY-103-4.0\(100\)](#) [4627-S](#) [3-1991136-0](#) [561-SL1000NYGY](#) [561-SL1000PP](#) [561-SL250FRPP](#)