


Part Number: 1905X35X

Type	Size	Rating	Description
LED	M8	24VDC	Recessed Bezel Panel Indicator

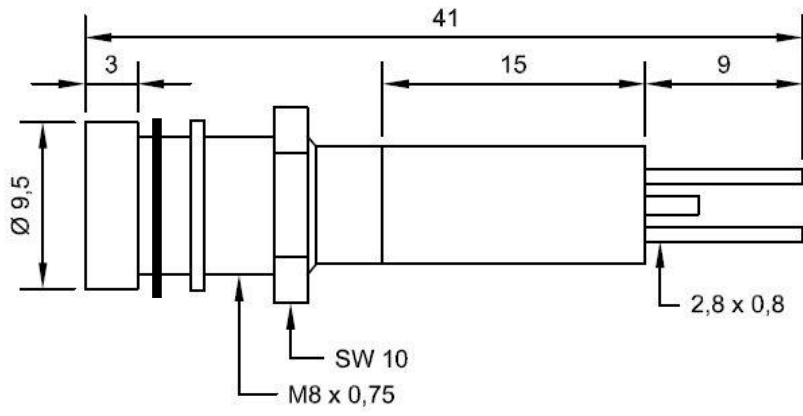

Part #	Colour	Voltage(V)	Current(mA)	Intensity(mcd)
1905X353	Red	24Vdc	20	80
1905X351	Green	24Vdc	20	32
1905X352	Yellow	24Vdc	20	32
1905X357	Blue	24Vdc	20	60

Notes:

- 1 X = Chrome Bezel finish. 0 = Satin, 1 = Black, 2 = Matt
- 2 Electrical & optical data are measured at an ambient temperature of 25°C
- 3 Luminous intensity at DC
- 4 Storage temperature -25 °C to +80°C
- 5 Application temperature -20 °C to +60°C
- 6 Voltage tolerance ±10%
- 7 Due to component tolerances, colour temperature variations may be observed
- 8 The terminals are not qualified for soldering
- 9 Degree of protection IP67 when used with the supplied gasket
- 10 The plastic(polycarbonate) has limited chemical resistance
- 11 RoHS & REACH SVHC compliant

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [LED Panel Mount Indicators](#) category:

Click to view products by [CML](#) manufacturer:

Other Similar products are found below :

[607-1312-310F](#) [607-3232-140F](#) [6091M1-24V](#) [6091M5-24V](#) [6091M7-24V](#) [821-0331-503](#) [FL2870C8R](#) [FL2950WL7B](#) [FL589WL8R](#)
[Q6P3BXXB12E](#) [H8630FBBA3](#) [MPC5ADW6.0](#) [DX1091GN](#) [NL177WL3G](#) [NL276C3G](#) [NL2950BWL3G](#) [NL2950CWL2R](#) [NL589WL2R](#)
[NL67C3G](#) [NL67C3R](#) [2191L1-12V](#) [PB22SIOL0RG](#) [PB22SPPM41R](#) [PB22SPPM61R](#) [LE177C5B](#) [LH1048BSWL3702](#) [LH1048BWL3702](#)
[LH382A](#) [LHM62B](#) [SSI-LXH387USBD-150](#) [SSI-LXH9ZIC40587](#) [SSP-LXS110818BA](#) [FL2950BWL7R](#) [FL2950WL7R](#) [FL2951WL8G](#)
[FL2951WL8R](#) [FL589C7R](#) [FL67C7R](#) [FL67WL8G](#) [2191QU7-24V](#) [2191U1-12V](#) [2191U5-12V](#) [2191U5-6V](#) [2191U7-12V](#) [249-4167-3734-504F](#) [Q6P5BXXG02E](#) [3990A7](#) [5110F3-12V](#) [MPC5BCW18.0](#) [556-1237-801F](#)