G-Series



The G-Series toggle switches are single or double pole, AC rated up to 20 amps and contain a slow-make, slow-break contact mechanism. These switches are available in a wide range of ratings, terminations, circuits and bushing/toggle configurations.

Specifications

- Certifications*: UL, CSA, VDE
- Dielectric Strength: 1,000 V (minimum)
- Insulation Resistance: 100 Megohms (minimum)
- Base Material: Phenolic
- Actuator Material: Brass/Nickel Plate or Polycarbonate
- Bushing Material: Brass/Nickel Plate or Polycarbonate
- * Due to ongoing technological advances, consult factory for certification specifics.

NBL3

NWH3

C3

.687

.687

1.50

.465


.465

.465

NBL8

NWH8

C8

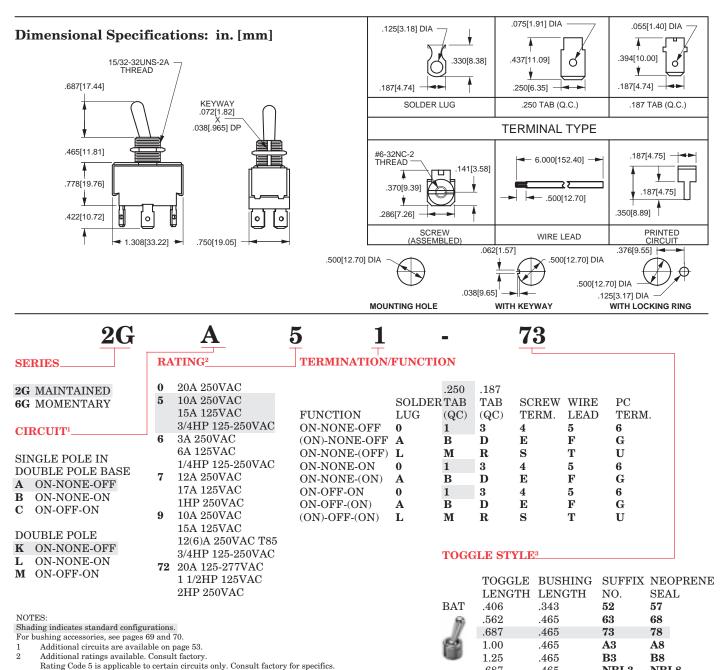

Rating 9 is only available with nylon bushing and actuator. See page 53 for callout.


Rating 72 is only available in maintained circuits and nylon construction. See page 53 for callout. NBL toggle uses black oxide plated metal bushing for standard construction. NWH toggles use nickel plated

Rating 9 is only available with terminations 0 and 1, circuits A, B, K and L only.


metal bushing for standard construction




Nylon Toggle

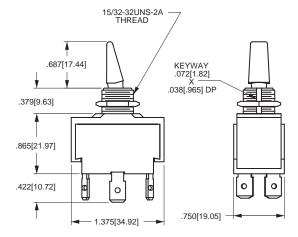

S.P. OR D.P. NYLON



FOR NYLON TOGGLES AFTER TERMINATION SELECTION, ADD SUFFIXES: (ex.) 2GK51-D-4B-B

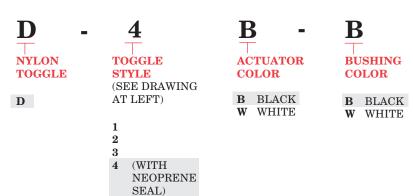

Additional Circuits1

POSITION 1	POSITION 2	POSITION 3		
CIRCUIT				
CIRCUIT 1 ON	2 CIRCUITS ON	CIRCUIT 2 ON		
CIRCUIT 2 ON	CIRCUIT 1 ON	OFF		
2 CIRCUITS ON	CIRCUIT 1 ON	OFF		
2 CIRCUITS (ON)	CIRCUIT 1 ON	OFF		
SINGLE POLE TRIPLE THROW				
ON	ON	ON		
E POLE DOUBLE THROW	<i>7</i> *			
ON	NONE	ON		
ON	OFF	ON		
(ON)	OFF	(ON)		
	CIRCUIT CIRCUIT 1 ON CIRCUIT 2 ON 2 CIRCUITS ON 2 CIRCUITS (ON) E THROW ON E POLE DOUBLE THROW ON	CIRCUIT CIRCUIT 1 ON 2 CIRCUITS ON CIRCUIT 2 ON CIRCUIT 1 ON 2 CIRCUITS ON CIRCUIT 1 ON 2 CIRCUITS (ON) CIRCUIT 1 ON E THROW ON ON E POLE DOUBLE THROW* ON NONE ON OFF		

*WITH REVERSING DOUBLE POLE DOUBLE THROW CIRCUITS, USE TERMINATION/FUNCTION FROM FOLLOWING OPTIONS:

SOLDER	$.250~\mathrm{TAB}$	SCREW	WIRE
LUG	(Q.C)	TERM.	LEAD
3	3/TABS	4	1
3	3/TABS	4	1
3	3/TABS	4	1

NOTES:

Shading indicates standard configurations.

¹ Additional momentary circuits are available. Consult factory for details.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Toggle Switches category:

Click to view products by Carling manufacturer:

Other Similar products are found below:

A19HV 8A1-C-222 60012L 6006L 6663 7101MD9V30GE 7101SPDV30BE 7103SDV30BE 7105D 7108P3YAV2BE 71YY50282

7201MD9AVBE 7301K38 7306K36 7310K36 7314K36 7506K4 7592K6 7691K14 7700K1 8396K108 8824K14 8828K13 G2VX G3VX

PS83-121G A101MD9AB04 A101SD9AB04 A101SDCQ04 A103SD9AQ04 A107TZB04 A123P32YZQ A123S1YZG A127S1YCQ 1
1825192-0 A131S1YZQ A201SCWZB04 A207SYCB04 A208J61ZQ0004 A221K12KAG A221S1YZQ A221T1TCQ A232K12KZQ

A232M1YCQ A323S1CWZQ A423S1CWZG-M8 A423S1YZQ 12149A-3V 12156AX408 12147AGKX679