


datasheet for MA 260 SH
 article number: 973889100



product description:	order number: 973 889-100
description:	Contact-protected Miniature alligator clip with high strength insulation and nickel-plated bronze jaws. Clamping range up to a bolt diameter of 6 mm. The part of the jaws (fine wire section) allows a secure contact to be made when clamping even the thinner wire. 4 mm diameter brass socket connection.
typ:	MA 260 SH schwarz/black
system:	4mm safety system
order number:	973 889-100
clamping range:	6 mm
color	●
other color versions:	● ●
technical data	
measurement category acc. to IEC 61010:	CAT II
type of contact:	clamp
type of termination:	4 mm socket (unsprung)
rated voltage:	AC/DC 300 V
rated current:	15 A
Please consider derating curve!	
contact resistance:	10 mOhm
material	
contact material:	bronze
contact surface material:	nickel
housing material:	PA
environmental conditions:	
temperature range:	-25 °C to +80 °C
inflammable class:	
housing (basic material):	UL 94 HB
drawing	

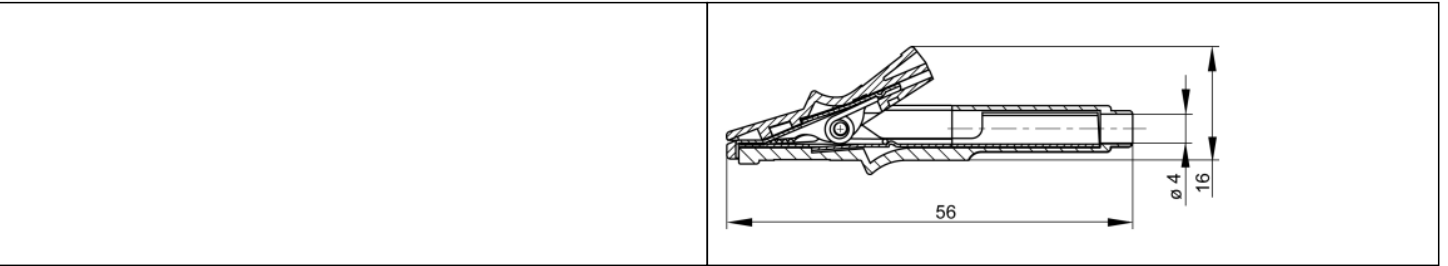

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Test Clips](#) category:

Click to view products by [Hirschmann](#) manufacturer:

Other Similar products are found below :

[010000](#) [923742-28](#) [923743-16](#) [923850-C](#) [927739-40](#) [BU-656-0](#) [923738-28](#) [923743-20](#) [4140A](#) [4324A](#) [TL820](#) [TL822](#) [5116](#) [5450](#) [5216](#)
[5252](#) [5454](#) [5694](#) [923700](#) [923698](#) [CR0060](#) [3038](#) [0040.1151.2](#) [927739-20](#) [923743-14](#) [923743-40](#) [R999701600](#) [923706](#) [5240](#) [603006001](#)
[930317800](#) [930317801](#) [973889100](#) [923714](#) [R999710600](#) [949-1](#) [458-3](#) [SK 201200278 020](#) [AA0-A4830-A00](#) [00425](#) [R8-1A RED](#) [R8-1B](#)
[BLACK](#) [R8-54 RED](#) [MA1SW](#) [MA260SH SW](#) [AX-CR-02-SET](#) [5004-LM-IEC-RT](#) [5004-LM-IEC-SW](#) [5066-IEC-GE](#) [5066-IEC-SW](#)