

Chromleuchte SWBU 08 IP67 Innenreflektor

Spezifikation

LED Leuchte in 5 verschiedenen Leuchtfarben, Schutzart IP 67. Verchromtes Messinggehäuse mit Gewinde M8x0,75 mm für Schraubbefestigung. Lieferung incl. Unterlegtring, Befestigungsmutter und Dichtscheibe.

Material

Gehäuse: CuZn verchromt
Isolierteil: PC in Leuchtfarbe
Mutter: CuZn vernickelt
Unterlegtring: Fe vernickelt
O-Ring: NBR 70

Einbau-Öffnung

Ø8+0,2 mm

Anschluss

Flachstecker 2,8x0,5 mm

Optionen

Gehäuse in mattchrom
Einbau anderer LED-Typen gleicher Bauform auf Anfrage

Chromium Indicator SWBU 08 IP67 Inside Reflector

Specification

LED indicator available in 5 different colours, protection IP 67. Chromed plated brass housing with M8x0.75mm for screw mounting, complete with washer, nut and seal washer.

Material

Housing: CuZn chromium plated
Insulating part: PC in light colour
Nut: CuZn nickel-plated
Washer: Fe nickel-plated
O-ring: NBR 70

Mounting-hole

Ø8+0.2 mm


Connection

Tab terminal 2.8x0.5 mm

Options

Housing frosted chromium plated
mounting of other LED types in the same size possible on request

LED optische-, elektrische Kenn- / Grenzdaten LED optical-, electrical- Characteristics max. ratings	Zeichen / sign Einheit / unit Parameter	Farbe / colour rot / red	Farbe / colour gelb / yellow	Farbe / colour grün / green	Farbe / colour blau / blue	Farbe / colour weiß / white	Farbe / colour ultra-grün / ultra green
LED Typ / LED type		U3	U3	H3	U3	U3	U3
Lichtstärke typ. / typical luminous intensity	$I_v / \text{mcd} / I_f = 20 \text{ mA}$	1300	700	150	1400	1300	4700
Dominante Wellenlänge / dominant wavelength	$\lambda_{\text{DOM}} / \text{nm}$	628	588	568	470	$x = 0,25-0,37$ $y = 0,205-0,375$	525
Abstrahlwinkel / viewing angle	$2\varphi / ^\circ$	50	50	50	50	50	50
Betriebstemperatur / operating temperature	$T_{\text{OP}} / ^\circ\text{C}$	-40 / +70	-40 / +70	-40 / +70	-40 / +70	-40 / +70	-40 / +70
Lagertemperatur / storage temperature	$T_{\text{STG}} / ^\circ\text{C}$	-40 / +100	-40 / +100	-40 / +100	-40 / +100	-40 / +100	-40 / +100

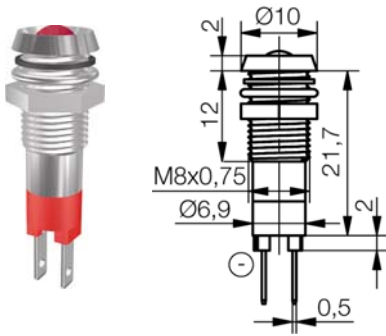

glanzchrom / chromium plated Typ / type	Artikel Nr.: / part number			
	12-14 V	24-28 V	130 V AC	230 V AC
rot / red	SWBU 08012	SWBU 08014	SWBU 08017	SWBU 08018
gelb / yellow	SWBU 08112	SWBU 08114	SWBU 08117	SWBU 08118
grün / green	SWBH 08212	SWBH 08214	SWBH 08217	SWBH 08218
blau / blue	SWBU 08412	SWBU 08414	SWBU 08417	SWBU 08418
weiß / white	SWBU 08612	SWBU 08614	SWBU 08617	SWBU 08618
ultra-grün / ultra-green	SWBU 08712	SWBU 08714	SWBU 08717	SWBU 08718

schwarzchrom / black chromium Typ / type	Artikel Nr.: / part number			
	12-14 V	24-28 V	130 V AC	230 V AC
rot / red	SWDU 08012	SWDU 08014	SWDU 08017	SWDU 08018
gelb / yellow	SWDU 08112	SWDU 08114	SWDU 08117	SWDU 08118
grün / green	SWDH 08212	SWDH 08214	SWDH 08217	SWDH 08218
blau / blue	SWDU 08412	SWDU 08414	SWDU 08417	SWDU 08418
weiß / white	SWDU 08612	SWDU 08614	SWDU 08617	SWDU 08618
ultra-grün / ultra-green	SWDU 08712	SWDU 08714	SWDU 08717	SWDU 08718

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [LED Panel Mount Indicators](#) category:

Click to view products by [Signal-Construct](#) manufacturer:

Other Similar products are found below :

[607-1312-310F](#) [607-3232-140F](#) [6091M1-24V](#) [6091M5-24V](#) [6091M7-24V](#) [821-0331-503](#) [FL2870C8R](#) [FL2950WL7B](#) [FL589WL8R](#)
[Q6P3BXXB12E](#) [H8630FBBA3](#) [MPC5ADW6.0](#) [DX1091GN](#) [NL177WL3G](#) [NL276C3G](#) [NL2950BWL3G](#) [NL2950CWL2R](#) [NL589WL2R](#)
[NL67C3G](#) [NL67C3R](#) [2191L1-12V](#) [PB22SIOL0RG](#) [PB22SPPM41R](#) [PB22SPPM61R](#) [LE177C5B](#) [LH1048BSWL3702](#) [LH1048BWL3702](#)
[LH382A](#) [LHM62B](#) [SSI-LXH387USBD-150](#) [SSI-LXH9ZIC40587](#) [SSP-LXS110818BA](#) [FL2950BWL7R](#) [FL2950WL7R](#) [FL2951WL8G](#)
[FL2951WL8R](#) [FL589C7R](#) [FL67C7R](#) [FL67WL8G](#) [2191QU7-24V](#) [2191U1-12V](#) [2191U5-12V](#) [2191U5-6V](#) [2191U7-12V](#) [249-4167-3734-504F](#) [Q6P5BXXG02E](#) [3990A7](#) [5110F3-12V](#) [MPC5BCW18.0](#) [556-1237-801F](#)