


JWPF CONNECTOR

2.0mm pitch/Disconnectable Crimp style Wire-to-wire connectors (waterproof type)

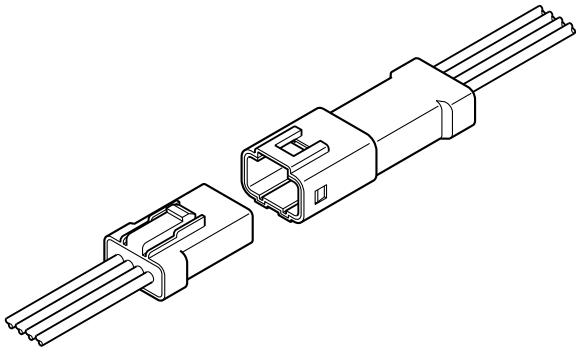

This JWPF connector can be used for the place of which especially waterproof is required.

This is the wire-to-wire connector that is grade 7 ingress protection of JIS C 0920 (IPX7 of IEC 60529).

- Waterproof performance
- Contained seal ring
- Solid rubber seal
- Double-spring construction
- Housing-to-terminal locks
- Inner-housing lock

Specifications

- Current rating: 3 A AC, DC (AWG #22)
- Voltage rating: 100 V AC, DC
- Temperature range: -55°C to +85°C
(including temperature rise in applying electrical current)
- Contact resistance: Initial value/ 10 mΩ max.
After environmental tests/ 15 mΩ max.
- Insulation resistance: 1,000 MΩ min.
- Withstanding voltage: 1,000 VAC/minute
- Applicable wire: AWG #26 to #22
0.13 to 0.33 mm²
Insulation O.D./ 1.4 to 1.7 mm
- Waterproof grade: Grade 7 ingress protection of JIS C 0920 (IPX7 of IEC 60529)

*Refer to "General Instruction and Notice when using Terminals and Connectors" at the end of this catalog.

* Contact JST for details.


*Compliant with RoHS.

Standards

Ⓜ Recognized E60389


△ R50326661

Assembly layout

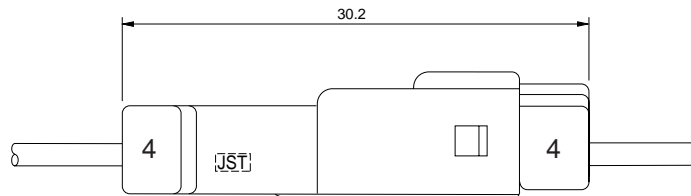


Contact

Tab contact

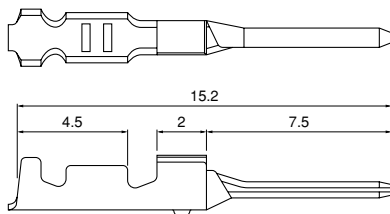

Receptacle contact

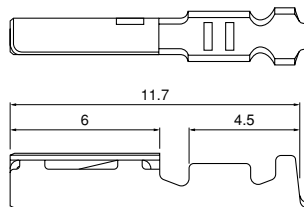

Model No.		Applicable wire		Insulation O.D. (mm)	Q'ty/reel
Tab contact	Receptacle contact	mm ²	AWG #		
SWPT-001T-P025	SWPR-001T-P025	0.13~0.33	26~22	1.4~1.7	8,200

Material and Finish

Tab contact: Phosphor bronze, tin-plated (reflow treatment)
Receptacle contact: Copper alloy, tin-plated (reflow treatment)

RoHS compliance

Note: Contact JST for brass products.

Contact	Crimping machine	Applicator		
		Crimp applicator	Dies	Crimp applicator with dies
SWPT-001T-P025	AP-K2N	MKS-L	MK/SWPR/T-001-025	APLMK SWPR/T001-025
SWPR-001T-P025		-	-	-

Note: Contact JST for fully automatic crimping applicator.

JWPF CONNECTOR

Housing

Material: PBT, UL94V-0, natural (white)

Circuits	Tab housing (for Tab contact)		Receptacle housing (for Receptacle contact)	
2	02T-JWPF-VSLE-S 	Q'ty/ bag	02R-JWPF-VSLE-S 	Q'ty/ bag
		1,000		1,000
3	03T-JWPF-VSLE-S 	Q'ty/ bag	03R-JWPF-VSLE-S 	Q'ty/ bag
		1,000		1,000
4	04T-JWPF-VSLE-S 	Q'ty/ bag	04R-JWPF-VSLE-S 	Q'ty/ bag
		1,000		1,000
6	06T-JWPF-VSLE-D 	Q'ty/ bag	06R-JWPF-VSLE-D 	Q'ty/ bag
		1,000		1,000
8	08T-JWPF-VSLE-D 	Q'ty/ bag	08R-JWPF-VSLE-D 	Q'ty/ bag
		1,000		1,000

RoHS compliance

Note: 1. Receptacle housing comes with seal rubber plate.

2. Tab housing comes with seal rubber plate, seal ring and seal ring holder.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Terminals](#) category:

Click to view products by [JST](#) manufacturer:

Other Similar products are found below :

[HT-13-10](#) [71M-250-32-NB](#) [01-2065-1-0216](#) [00581P0075](#) [M10-10RX](#) [M10BCK](#) [60205-1](#) [604200-1](#) [60598-1-CUT-TAPE](#) [60617-1-C](#) [60873-1](#) [M14-516R/SK](#) [M14-6RSX](#) [M18-10FLX](#) [M18-8FBX](#) [M18-8R/LX](#) [M18BCK](#) [61314-6-C](#) [61-S](#) [61-SN-A](#) [62-NBM-A](#) [63-S](#) [640179-1](#) [640917-2-CUT-TAPE](#) [6501550002](#) [66107-2-C](#) [66107-4-C](#) [696683-1](#) [696834-1](#) [696861-1](#) [696931-1](#) [696999-1](#) [M8-516RK](#) [M86700006](#) [MA250DMFMX-A](#) [701-2007](#) [701-2307](#) [701-7761-03](#) [70F-110-32-PB](#) [718-N-A](#) [71M-187-20-NBL](#) [71M-250-32-NBL](#) [72F-187-20-NBL](#) [72M-250-32-NBL](#) [7310](#) [73F-250-32](#) [73F-250-32-NBL](#) [73F-250-32-NL](#) [F14-10C](#) [F-1M](#)