

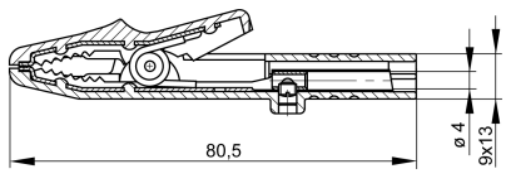


datasheet for AK 2 S
 article number: 932146101



product description:	order number: 932 146-101
description:	Insulated, high strength alligator clip. Clamping range up to 9.5 mm bolt diameter. The flat part of the jaws (fine wire section) allows even the finest wires to be clamped. 4 mm diameter socket connection and screw connection up to 1.5 mm ² .
typ:	AK 2 S rot/red
system:	4mm system
order number:	932 146-101
clamping range:	9.5 mm
color	
other color versions:	
technical data	
measurement category acc. to IEC 61010:	CAT I
type of contact:	clamp
type of termination:	4 mm socket (unsprung), screw
rated voltage:	30 VAC / 60 VDC
rated current:	25 A
Please consider derating curve!	
contact resistance:	10 mOhm
material	
contact material:	brass
contact surface material:	nickel
housing material:	PP
environmental conditions:	
temperature range:	-25 °C to +80 °C
inflammable class:	
housing (basic material):	UL 94 HB
drawing	
	

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Test Clips](#) category:

Click to view products by [Hirschmann](#) manufacturer:

Other Similar products are found below :

[010000](#) [923742-28](#) [923743-16](#) [923850-C](#) [927739-40](#) [BU-656-0](#) [923738-28](#) [923743-20](#) [4140A](#) [4324A](#) [TL820](#) [TL822](#) [5116](#) [5450](#) [5216](#)
[5252](#) [5454](#) [5694](#) [923700](#) [923698](#) [CR0060](#) [3038](#) [0040.1151.2](#) [927739-20](#) [923743-14](#) [923743-40](#) [R999701600](#) [923706](#) [5240](#) [603006001](#)
[930317800](#) [930317801](#) [973889100](#) [923714](#) [R999710600](#) [949-1](#) [458-3](#) [SK 201200278 020](#) [AA0-A4830-A00](#) [00425](#) [R8-1A RED](#) [R8-1B](#)
[BLACK](#) [R8-54 BLACK](#) [R8-54 RED](#) [MA1SW](#) [MA260SH SW](#) [AX-CR-02-SET](#) [5004-LM-IEC-RT](#) [5004-LM-IEC-SW](#) [5066-IEC-GE](#)