


- 1 TRUE POSITION TOLERANCE OF THE POST TIPS APPLIES WHEN THE HEADERS ARE HELD FLAT AGAINST THE PRINTED CIRCUIT BOARD.
- 2 ASSEMBLY MAY BE BROKEN TO THE DESIRED NUMBER OF POSITIONS,
- 3 .000100-.000200 MATTE TIN-LEAD OVER .000050 NICKEL.
- 4 .000100-.000200 BRIGHT TIN OVER .000050 NICKEL.
- 5 PRELIMINARY PART - NOT RELEASED FOR PRODUCTION.
- 6 HOUSING MATERIAL: FLAME RETARDANT THERMOPLASTIC; COLOR-BLACK.
- 7 OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

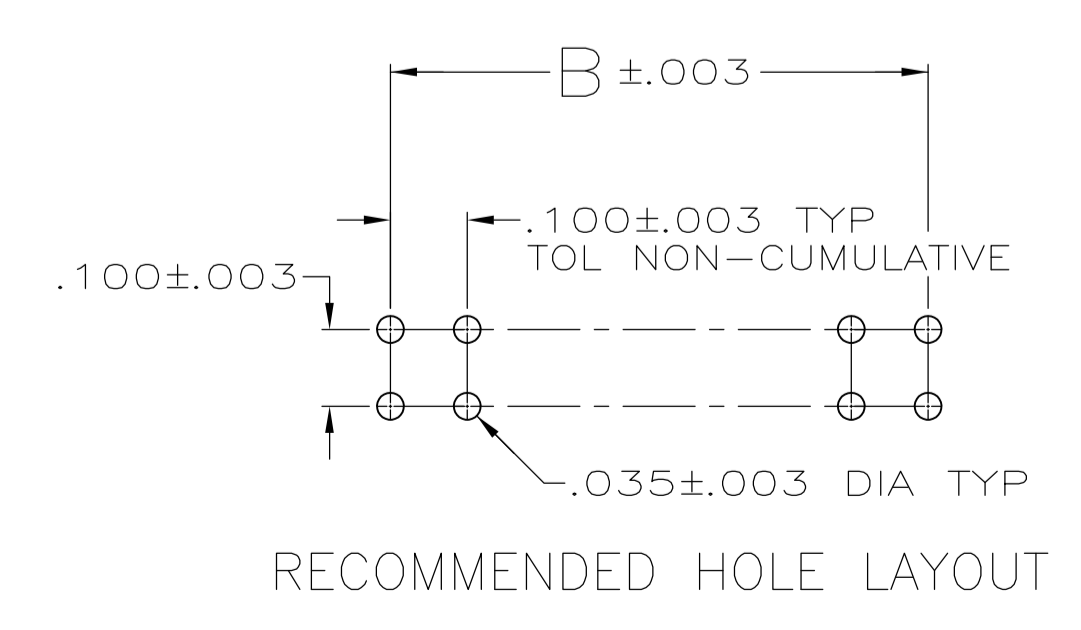

4	4	1.684	1.600	16	34	4-103328-9
5	4	1.284	1.200	12	26	4-103328-8
4	4	.884	.800	8	18	4-103328-7
7	4	.584	.500	5	12	4-103328-6
5	4	3.984	3.900	39	80	4-103328-5
4	4	.984	.900	9	20	4-103328-4
4	4	.684	.600	6	14	4-103328-3
4	4	.284	.200	2	6	4-103328-2
4	4	.084	—	—	2	4-103328-1
3	3	3.984	3.900	39	80	4-103328-0
7	3	3.884	3.800	38	78	3-103328-9
7	3	3.784	3.700	37	76	3-103328-8
7	3	3.684	3.600	36	74	3-103328-7
7	3	3.584	3.500	35	72	3-103328-6
7	3	3.484	3.400	34	70	3-103328-5
7	3	3.384	3.300	33	68	3-103328-4
7	3	3.284	3.200	32	66	3-103328-3
7	3	3.184	3.100	31	64	3-103328-2
7	3	3.084	3.000	30	62	3-103328-1
7	3	2.984	2.900	29	60	3-103328-0
7	3	2.884	2.800	28	58	2-103328-9
7	3	2.784	2.700	27	56	2-103328-8
7	3	2.684	2.600	26	54	2-103328-7
7	3	2.584	2.500	25	52	2-103328-6
3	3	2.484	2.400	24	50	2-103328-5
7	3	2.384	2.300	23	48	2-103328-4
7	3	2.284	2.200	22	46	2-103328-3
7	3	2.184	2.100	21	44	2-103328-2
7	3	2.084	2.000	20	42	2-103328-1
3	3	1.984	1.900	19	40	2-103328-0
7	3	1.884	1.800	18	38	1-103328-9
7	3	1.784	1.700	17	36	1-103328-8
3	3	1.684	1.600	16	34	1-103328-7
3	3	1.584	1.500	15	32	1-103328-6
7	3	1.484	1.400	14	30	1-103328-5
3	3	1.384	1.300	13	28	1-103328-4
3	3	1.284	1.200	12	26	1-103328-3
3	3	1.184	1.100	11	24	1-103328-2
3	3	1.084	1.000	10	22	1-103328-1
7	3	.984	.900	9	20	1-103328-0
3	3	.884	.800	8	18	103328-9
3	3	.784	.700	7	16	103328-8
3	3	.684	.600	6	14	103328-7
3	3	.584	.500	5	12	103328-6
3	3	.484	.400	4	10	103328-5
3	3	.384	.300	3	8	103328-4
3	3	.284	.200	2	6	103328-3
3	3	.184	.100	1	4	103328-2
3	3	.084	—	—	2	103328-1

7 SUPERSEDED BY 6-146254-1

THIS DRAWING IS A CONTROLLED DOCUMENT.		DIN J.MARTINELLI 10/15/92		TE Connectivity	
DIMENSIONS: INCHES		CIR JOHN KNITTLE 23NOV92			
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD B.FLINCHBAUGH 23NOV92		NAME	
0 PLC ± -		NAME		ASSEMBLY, HEADER, BREAKAWAY, MOD II, DOUBLE ROW, .100 X .100 C/L, VERTICAL, WITH .025 SQUARE POSTS	
1 PLC ± -		APPLICATION SPEC		PRODUCT SPEC	
2 PLC ± -		SIZE		CAGE CODE	
3 PLC ± .005		WEIGHT		DRAWING NO	
4 PLC ± -		A1 00779		103328	
ANGLES ± -		CUSTOMER DRAWING		SCALE 4:1 SHEET 1 OF 1 REV P4	
FINISH SEE TABLE		RESTRICTED TO			

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Headers & Wire Housings](#) category:

Click to view products by [TE Connectivity](#) manufacturer:

Other Similar products are found below :

[95000-104TRLF](#) [10135584-644402LF](#) [DF62W-EP2022PCA](#) [95000-106TRLF](#) [DF62W-2022SCA](#) [DF62W-EP2022PC](#) [2203348](#) [DF62W-2022SC](#) [1084018](#) [1029039](#) [1084017](#) [802-10-012-10-002000](#) [1112640](#) [1112639](#) [891-007-9SS-BST1T](#) [000-34000](#) [0008550134](#) [0009482033](#) [0009507031](#) [57102-F02-18ULF](#) [57102-S06-03LF](#) [57202-S52-04LF](#) [PCN6-15S-2.5E](#) [0039019024](#) [58102-G61-06LF](#) [582553-1](#) [0009485154](#) [0009508121](#) [0022285053](#) [0050291907](#) [018731A](#) [LY20-4P-DT1-P1E-BR](#) [02.125.8002.8](#) [60101931](#) [60598-1 \(Cut Strip\)](#) [M1625-3R/100](#) [61062-3](#) [61082-181009](#) [CSU011177004](#) [636-1427](#) [638009-1](#) [641938-9](#) [641991-4](#) [644168-1](#) [644827-2](#) [647662-1](#) [65039-019ELF](#) [65692-001LF](#) [65781-018](#) [65781-047](#)