

a) Part as supplied.




b) Part after unrestricted recovery.


 DIMENSIONS in millimetres
(in inches, for reference)

| Part No. | H | | J | | P | R | S | T | U&V | JO | HW | JW | X | Y |
|-----------|--------------|----------------|--------------|----------------|---------------|--------------|---------------|---------------|--------------|----------------|---------------|---------------|--------------|--------------|
| | Min a | Max b | Min a | Max b | | | | | | | | | | |
| ① 202K121 | 24 (0.94) | 10.4 (0.41) | 24 (0.94) | 5.6 (0.22) | 38 (1.50) | 21 (0.83) | 3.0 (0.12) | 1.0 (0.04) | 12 (0.47) | 8.5 (0.33) | 1.6 (0.06) | 0.9 (0.04) | 24 (0.94) | 13 (0.51) |
| ① 202K132 | 30 (1.18) | 14.2 (0.56) | 30 (1.18) | 5.9 (0.23) | 55 (2.17) | 32 (1.26) | 3.0 (0.12) | 1.0 (0.04) | 12 (0.47) | 11.5 (0.45) | 1.8 (0.07) | 1.0 (0.04) | 24 (0.94) | 18 (0.71) |
| ① 202K142 | 31 (1.22) | 18.0 (0.71) | 31 (1.22) | 7.1 (0.28) | 67 (2.64) | 35 (1.38) | 3.0 (0.12) | 1.0 (0.04) | 20 (0.79) | 17.0 (0.67) | 1.8 (0.07) | 1.0 (0.04) | 32 (1.26) | 25 (0.98) |
| ① 202K153 | 36 (1.42) | 22.4 (0.88) | 36 (1.42) | 8.4 (0.33) | 80 (3.15) | 42 (1.65) | 3.0 (0.12) | 1.0 (0.04) | 20 (0.79) | 19.5 (0.77) | 2.0 (0.08) | 1.0 (0.04) | 32 (1.26) | 30 (1.18) |
| 202K163 | 43 (1.69) | 28.2 (1.11) | 43 (1.69) | 9.9 (0.39) | 99 (3.90) | 61 (2.40) | 3.0 (0.12) | 1.7 (0.07) | 20 (0.79) | 21.0 (0.83) | 2.2 (0.09) | 1.2 (0.05) | 52 (2.05) | 30 (1.18) |
| 202K174 | 60 (2.36) | 35.1 (1.38) | 60 (2.36) | 15.7 (0.62) | 130 (5.12) | 72 (2.83) | 3.0 (0.12) | 1.7 (0.07) | 20 (0.79) | 39.0 (1.54) | 3.2 (0.13) | 1.5 (0.06) | 52 (2.05) | 50 (1.97) |
| 202K185 | 66 (2.60) | 44.5 (1.75) | 66 (2.60) | 16.8 (0.66) | 170 (6.69) | 90 (3.54) | 3.0 (0.12) | 2.0 (0.08) | 20 (0.79) | 51.5 (2.03) | 3.8 (0.15) | 2.0 (0.08) | 52 (2.05) | 70 (2.76) |

② See over for explanation of Notes ① and ②






TE Connectivity

**Specification
Control Drawing**

Part Number

202K1** Issue 16

| Iss. | Date | E.C.R. No. | Details of Change |
|------|---------------|----------------|------------------------------------------|
| 7 | August 1986 | 4865 | Jo Dimension moved, & 2.0 Dia note added |
| 8 | August 1986 | 4865 | Jo dimension changed |
| 9 | February 2000 | CR00-HM-0001 | Injection point note added |
| 10 | April 2001 | CR01-HM-0008 | Redrawn to include inches |
| 11 | February 2002 | CR02-HM-0003 | /180 added to -3 & -4 |
| 12 | March 2002 | CR02-HM-0001 | Note ⑨ added (on 121 JW is 0.9 for -25) |
| 13 | June 2002 | CR02-HM-0001v2 | Note ⑨ removed |
| 14 | February 2005 | H0307 | JW was 1.0 |
| 15 | April 2007 | CR07-HM-010 | Document title was 202K121 thru 185 |

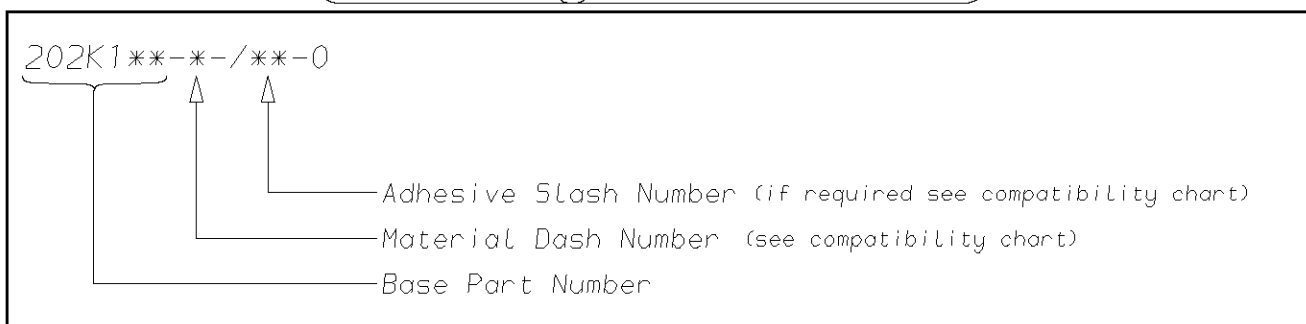Ordering Information**COMPATIBILITY CHART**

| Material Dash Number | Material Description | SPEC Number | Coating Slash Number |
|----------------------|---------------------------------|------------------|----------------------|
| -3 | POLYOLEFIN, SEMI-RIGID | RT-301, RK-6703 | /42, /86, /180 |
| -4 | POLYOLEFIN, FLEXIBLE | RT-1304 RT-1050 | /42, /86, /180 |
| -6 | SILICON | RT-602, RK-6706 | N/A |
| -25 | ELASTOMER, FLUID RESISTANT | RT-1325, RK-6713 | /42, /86, /225 |
| -130 | POLYOLEFIN, COMMERCIAL FLEXIBLE | RW-2008 | /42 |
| | | | |
| | | | |

NOTES

- ① Supplied with 2 lips only, Dimension V does not apply.
- ② Potting Port X @ 90° to Potting Port Y on 202K121.
- ③ If eyelet clip (000W212) is required with part then add CS-1858 to description (i.e. 202K132-3-CS-1858-0).
- ④ As supplied dimensions are for uncoated parts, when coating is added entry diameters will reduce by 1.5mm Max.
- ⑤ Potting Ports are optional, when specified by suffix -00 they will be located as shown.
- ⑥ For -12 SCD see 202K1**-12.
- ⑦ For -100 SCD see 202K1**-100.
- ⑧ On some parts a bump or depression at the material injection point may exist as a normal manufacturing process.

| | |
|---------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------|
| TE Connectivity Faraday Road, Swindon, Wiltshire, SN3 5HH England Telephone: (01793) 528171 Fax: 572516 | TE Connectivity 300, Constitution Drive, Menlo Park, CA 94025 USA Telephone (650) 361-3860 Fax: (650) 361-5579 |
| Cage Code K1010 | Cage Code 06090 |

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Circular MIL Spec Connector](#) category:

Click to view products by [TE Connectivity](#) manufacturer:

Other Similar products are found below :

[89075GULPR](#) [0025-262-542](#) [0025-264-3014](#) [58-570121-04S](#) [0134-213-1208](#) [0134-213-2209](#) [0025-258-000](#) [60-042022-07P](#) [60-042022-19P](#)
[60-042022-23P](#) [60-042217-10P](#) [0114-201-1278](#) [012-0467-000](#) [602GB06EG24-61SN](#) [0134-201-1207](#) [0134-213-1006](#) [6104-207-2302](#) [6104-](#)
[208-1902](#) [61-168211-04P](#) [61-168617-10P](#) [6131-202-19149P](#) [6131-204-21149P](#) [6131-208-13149P](#) [6131-209-17149P](#) [6131-210-11149P](#) [6131-](#)
[211-19149P](#) [6131-216-19149P](#) [6131-259-21149P](#) [6131-259-23149P](#) [6131-265-17149P](#) [6131-265-19149P](#) [CS3100A18-1P-472](#) [CS3100A-36-](#)
[77P](#) [CS3101A-16-55P](#) [CS3102A-10SL-55P](#) [CS3102A-14S-58P](#) [CS3102A-32-17P](#) [CS3102A32-25S](#) [CS3102C18-4P-472](#)
[CS3106A10SL3S004](#) [CS3106A-18-73S](#) [CS3108A-14S-52S](#) [CS3108A-28-51S](#) [6162-233-1277](#) [6162-324-1231](#) [M243082296Z](#)
[M2884010AC1S1](#) [CT0-24-10SC](#) [CT0M20-7PCAU](#) [M28840/17AC1G3](#)