


Panasonic

ideas for life

**High capacity
(Load current Max. 2A).
Flat-Packaged type DIP
(1Form A) 4-pin type.**

**PD PhotoMOS
(AQY27O)**

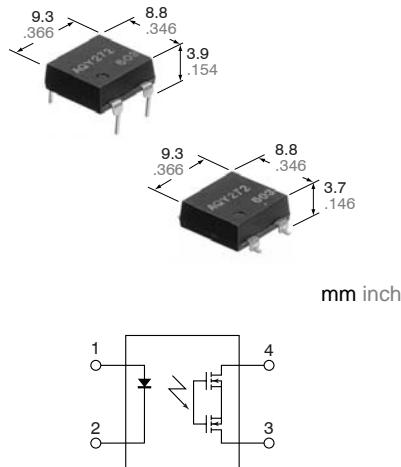

FEATURES

1. Flat-Packaged Type (W) 8.8×(D) 9.3×(H) 3.9mm (W) .346×(D) .366×(H) .154inch

2. High capacity

Supports the various types of load control, from very small loads to a maximum 2A at the rated load voltage 60V (AQY272)

3. High sensitivity

- Low ON resistance

A maximum 2A load can be controlled with a 5mA input current. The ON resistance is low at 0.11Ω (AQY272)

TYPICAL APPLICATIONS

- Measuring and Testing equipment
- IC Testers and Board Testers
- High speed inspection machines

TYPES

| Type | Output rating* | | Part No. | | | | Packing quantity | | | |
|-------|----------------|--------------|-----------------------|------------------------|----------|-----------------------------|--|------------|--|--|
| | Load voltage | Load current | Through hole terminal | Surface-mount terminal | | | | | | |
| | | | | Tube packing style | | Tape and reel packing style | | | | |
| AC/DC | 60V | 2.0A | AQY272 | AQY272A | AQY272AX | AQY272AZ | 1 tube contains 50 pcs. 1 batch contains 1,000 pcs. | 1,000 pcs. | | |
| | 100V | 1.3A | AQY275 | AQY275A | AQY275AX | AQY275AZ | | | | |
| | 200V | 0.65A | AQY277 | AQY277A | AQY277AX | AQY277AZ | | | | |
| | 400V | 0.35A | AQY274 | AQY274A | AQY274AX | AQY274AZ | | | | |

* Indicate the peak AC and DC values.

Note: For space reasons, the SMD terminal shape indicator "A" and the package style indicator "X" or "Z" are not marked on the relay.

RATING

1. Absolute maximum ratings (Ambient temperature: 25°C 77°F)

| | Item | Symbol | AQY272(A) | AQY275(A) | AQY277(A) | AQY274(A) | Remarks |
|-------------------------|-----------------------------------|-------------------|-----------|---------------------------------|-----------|-----------|-------------------------------------|
| Input | LED forward current | I _F | | 50 mA | | | |
| | LED reverse voltage | V _R | | 5 V | | | |
| | Peak forward current | I _{FP} | | 1 A | | | f = 100 Hz, Duty factor = 0.1% |
| | Power dissipation | P _{in} | | 75 mW | | | |
| Output | Load voltage (peak AC) | V _L | 60 V | 100 V | 200 V | 400 V | |
| | Continuous load current (Peak AC) | I _L | 2.0 A | 1.3 A | 0.65 A | 0.35 A | |
| | Peak load current | I _{peak} | 6.0 A | 4.0 A | 2.0 A | 1.0 A | 100ms (1 shot), V _L = DC |
| | Power dissipation | P _{out} | | 700 mW | | | |
| Total power dissipation | | P _T | | 750 mW | | | |
| I/O isolation voltage | | V _{iso} | | 2,500 V AC | | | |
| Temperature limits | Operating | T _{opr} | | −40°C to +85°C −40°F to +185°F | | | Non-condensing at low temperatures |
| | Storage | T _{stg} | | −40°C to +100°C −40°F to +212°F | | | |

PD PhotoMOS (AQY27O)


2. Electrical characteristics (Ambient temperature: 25°C 77°F)

| Item | | Symbol | AQY272(A) | AQY275(A) | AQY277(A) | AQY274(A) | Condition | | | |
|----------------------------------|----------------------|--|---|---------------------|-----------|-----------|--|--|--|--|
| Input | LED operate current | I_{Fon} | 1.0 mA | | 3.0 mA | | $I_L = 100 \text{ mA}$ $V_L = 10 \text{ V}$ | | | |
| | | | 0.4 mA | | 0.9 mA | | | | | |
| Output | LED turn off current | I_{Foff} | 1.25 V (1.16 V at $I_F = 10 \text{ mA}$) | | 1.5 V | | $I_F = 50 \text{ mA}$ | | | |
| | | | 0.11 Ω | | 0.23 Ω | | | | | |
| Transfer characteristics | On resistance | R_{on} | 0.18 Ω | | 0.34 Ω | | $I_F = 10 \text{ mA}$ $I_L = \text{Max.}$ Within 1 s on time | | | |
| | | | 0.7 Ω | | 1.1 Ω | | | | | |
| Off state leakage current | | I_{Leak} | | 2.1 Ω | | 3.2 Ω | | | | |
| Turn on time* | | T_{on} | 10 μA | | 10 ms | | $I_F = 0 \text{ mA}$ $V_L = \text{Max.}$ | | | |
| Turn off time* | | | 2.46 ms | | 2.40 ms | | | | | |
| I/O capacitance | | | 1.12 ms | | 1.65 ms | | | | | |
| Initial I/O isolation resistance | | | 5.0 ms | | 5.64 ms | | | | | |
| Maximum operating speed | | C_{iso} | 2.57 ms | | 3.88 ms | | $I_F = 5 \text{ mA}$ $I_L = 100 \text{ mA}$ $V_L = 10 \text{ V}$ | | | |
| Maximum operating speed | | | 10.0 ms | | 0.22 ms | | | | | |
| Maximum operating speed | | R_{iso} | 0.21 ms | | 0.10 ms | | $I_F = 5 \text{ mA or } 10 \text{ mA}$ $I_L = 100 \text{ mA}$ $V_L = 10 \text{ V}$ | | | |
| Maximum operating speed | | | 0.08 ms | | 3.0 ms | | | | | |
| Maximum operating speed | | 0.8 pF | | 1.5 pF | | 1,000 MΩ | | | | |
| Maximum operating speed | | $f = 1 \text{ MHz}$ | | $V_B = 0 \text{ V}$ | | 500 V DC | | | | |
| Maximum operating speed | | $I_F = 10 \text{ mA}$ | | Duty factor = 50% | | 0.5 cps | | | | |
| Maximum operating speed | | $I_L = \text{Max.}, V_L = \text{Max.}$ | | | | | | | | |

Note: Recommendable LED forward current $I_F = 5$ to 10 mA.

Type of connection

*Turn on/Turn off time

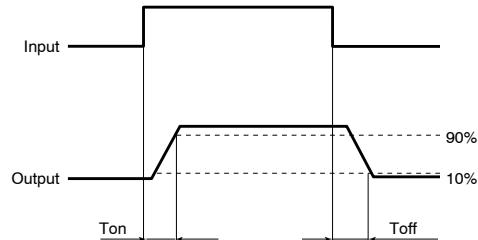


- Dimensions
- Schematic and Wiring Diagrams
- Cautions for Use

REFERENCE DATA


1. Load current vs. ambient temperature characteristics

Allowable ambient temperature: -40°C to $+85^{\circ}\text{C}$
 -40°F to $+185^{\circ}\text{F}$

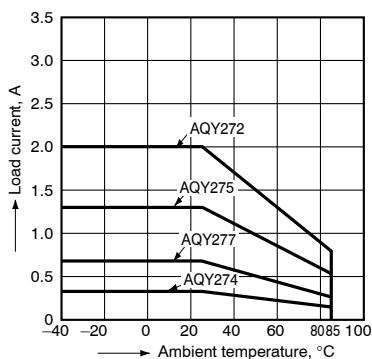


2.-1) On resistance vs. ambient temperature characteristics

LED current: 10 mA;
Continuous load current: 2.0 A (DC) (AQY272),
1.3 A (DC) (AQY275)

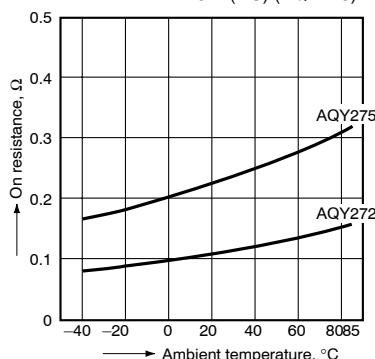


2.-2) On resistance vs. ambient temperature characteristics

LED current: 10 mA;
Continuous load current: 0.65 A (DC) (AQY277),
0.35 A (DC) (AQY274)

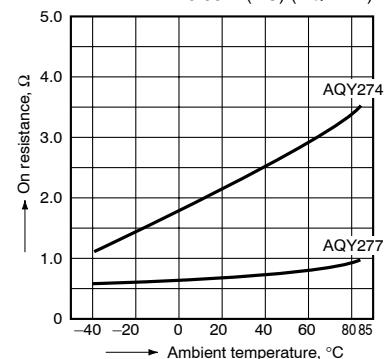


3. Turn on time vs. ambient temperature characteristics

LED current: 10 mA; Load voltage: 10 V (DC);
Continuous load current: 100 mA (DC)

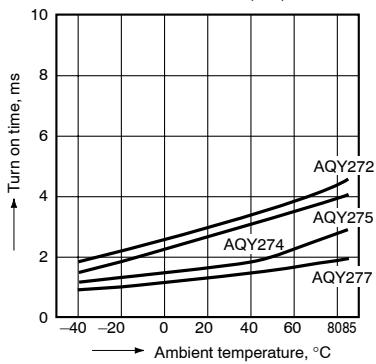


4. Turn off time vs. ambient temperature characteristics

LED current: 10 mA; Load voltage: 10 V (DC);
Continuous load current: 100 mA (DC)

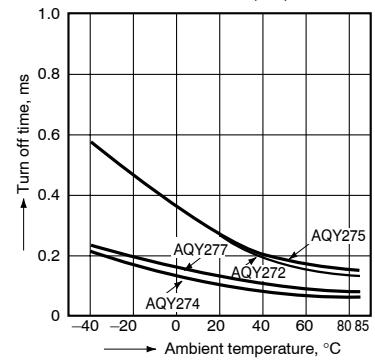


5. LED operate vs. ambient temperature characteristics

Load voltage: 10 V (DC);
Continuous load current: 100 mA (DC)

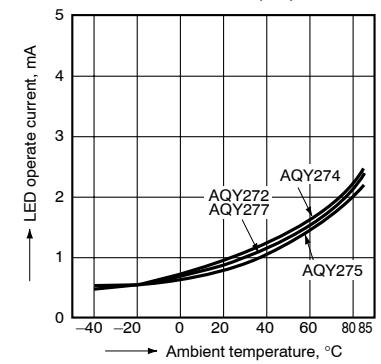


6. LED turn off current vs. ambient temperature characteristics

Load voltage: 10 V (DC);
Continuous load current: 100 mA (DC)

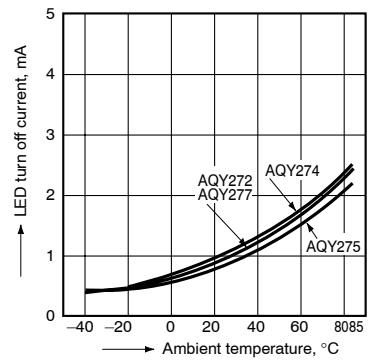


7. LED dropout voltage vs. ambient temperature characteristics

Sample: all types;
LED current: 5 to 50 mA

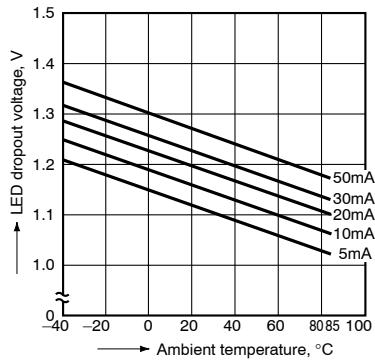

8. Current vs. voltage characteristics of output at MOS portion


Ambient temperature: 25°C 77°F

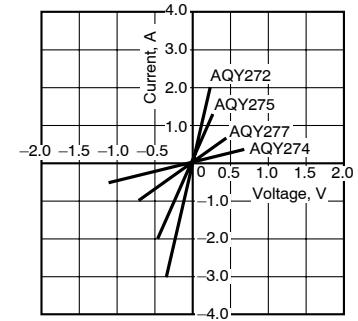

PD PhotoMOS (AQY27O)


9.-(1) Off state leakage current vs. load voltage characteristics

Ambient temperature: 25°C 77°F

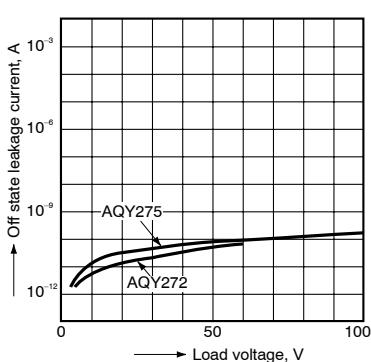


9.- (2) Off state leakage current vs. load voltage characteristics

Ambient temperature: 25°C 77°F

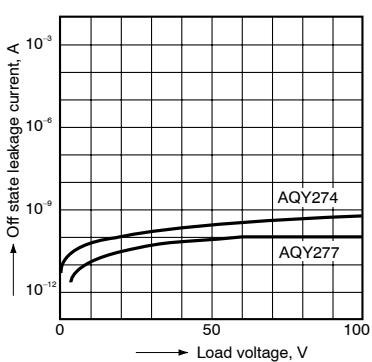


10. Turn on time vs. LED forward current characteristics

Load voltage: 10 V (DC); Continuous load current: 100 mA (DC); Ambient temperature: 25°C 77°F

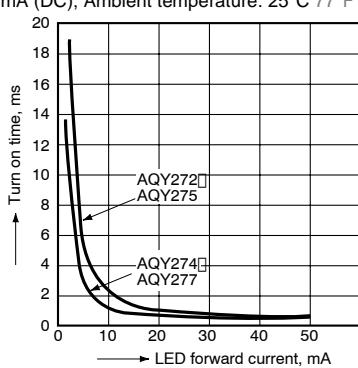


11. Turn off time vs. LED forward current characteristics

Load voltage: 10 V (DC); Continuous load current: 100 mA (DC); Ambient temperature: 25°C 77°F

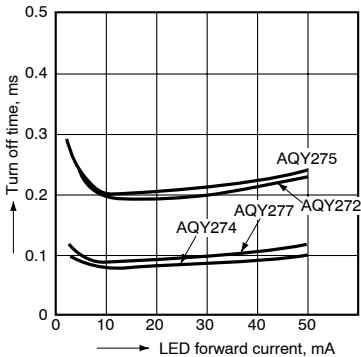


12.- (1) Turn on time vs. load voltage characteristics

LED current: 10 mA; Continuous load current: 100 mA; Ambient temperature: 25°C 77°F

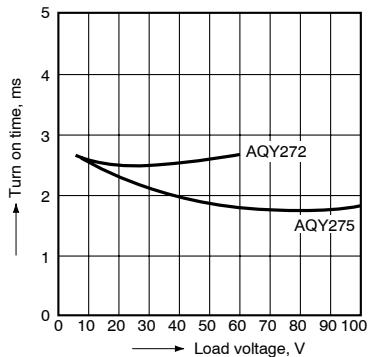


12.- (2) Turn on time vs. load voltage characteristics

LED current: 10 mA; Continuous load current: 100 mA; Ambient temperature: 25°C 77°F

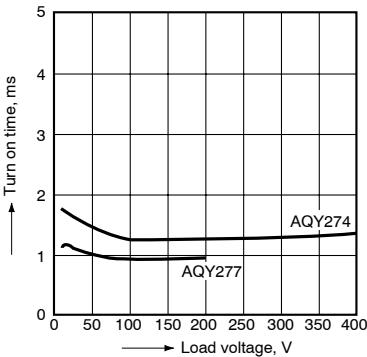


13.- (1) Turn on time vs. load current characteristics

LED current: 10 mA; Load voltage: 10 V (DC); Ambient temperature: 25°C 77°F

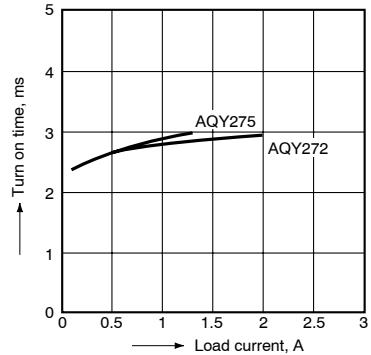


13.- (2) Turn on time vs. load current characteristics

LED current: 10 mA; Load voltage: 10 V (DC); Ambient temperature: 25°C 77°F

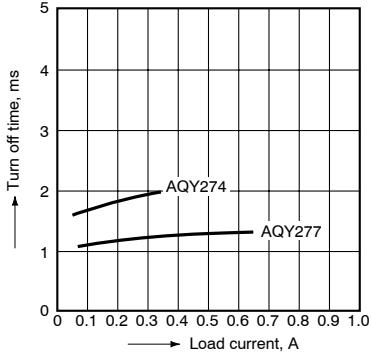


14.- (1) Turn off time vs. load voltage characteristics

LED current: 10 mA; Continuous load current: 100 mA; Ambient temperature: 25°C 77°F

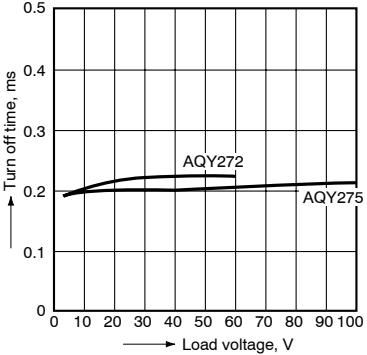


14.- (2) Turn off time vs. load voltage characteristics

LED current: 10 mA; Continuous load current: 100 mA; Ambient temperature: 25°C 77°F

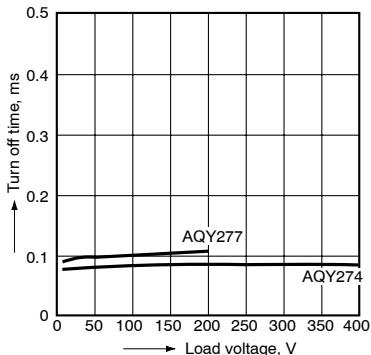


15.- (1) Turn off time vs. load current characteristics

LED current: 10 mA; Load voltage 10 V (DC); Ambient temperature: 25°C 77°F

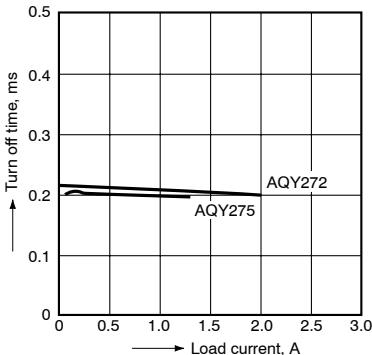


15.- (2) Turn off time vs. load current characteristics


LED current: 10 mA; Load voltage 10 V (DC); Ambient temperature: 25°C 77°F

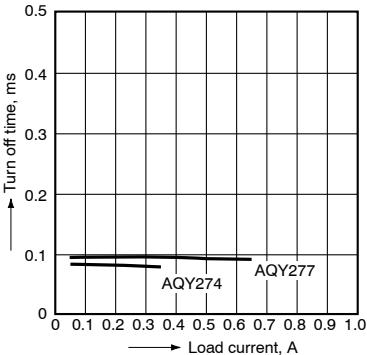

16. Maximum operating frequency vs. load voltage/current characteristics
 LED current: 10 mA;
 Ambient temperature: 25°C 77°F

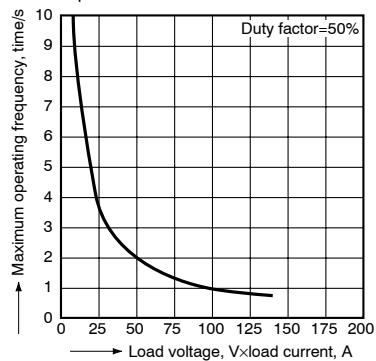

17. Output capacitance vs. applied voltage characteristics
 Frequency: 1 MHz;
 Ambient temperature: 25°C 77°F

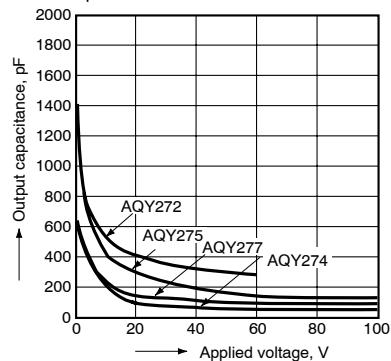

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Solid State Relays - PCB Mount category:

Click to view products by Panasonic manufacturer:

Other Similar products are found below :

[M86F-2W](#) [M90F-2W](#) [G2-1A07-ST](#) [G2-1A07-TT](#) [G2-1B02-TT](#) [G2-DA06-ST](#) [G3CN-202PL-3-US DC12](#) [G3CN-203P DC3-28](#)
[G3RDX02SNUSDC12](#) [PLA134S](#) [DMP6202A](#) [DS11-1005](#) [AQ3A2-ZT432VDC](#) [AQV212J](#) [AQV214SD02](#) [AQV252GAJ](#) [AQW414EA](#)
[AQY221R2SJ](#) [EFR1200480A150](#) [LCA220](#) [LCB110S](#) [1618400-5](#) [SR75-1ST](#) [AQV212AJ](#) [AQV238AD01](#) [AQV252GAXJ](#) [AQW414TS](#)
[AQY210SXT](#) [AQY212ST](#) [AQY221N2V1YJ](#) [AQY275AXJ](#) [G2-1A02-ST](#) [G2-1A02-TT](#) [G2-1A03-ST](#) [G2-1A03-TT](#) [G2-1A05-ST](#) [G2-1A06-TT](#) [G2-1A23-TT](#) [G2-1B01-ST](#) [G2-1B01-TT](#) [G2-1B02-ST](#) [G2-DA03-ST](#) [G2-DA03-TT](#) [G2-DA06-TT](#) [G3M-203PL-UTU-1 DC24](#)
[CPC2330N](#) [3-1617776-2](#) [CTA2425](#) [TS190](#) [LBB110S](#)