


FZ-LSi / FZ-LS / Neon Light Cables

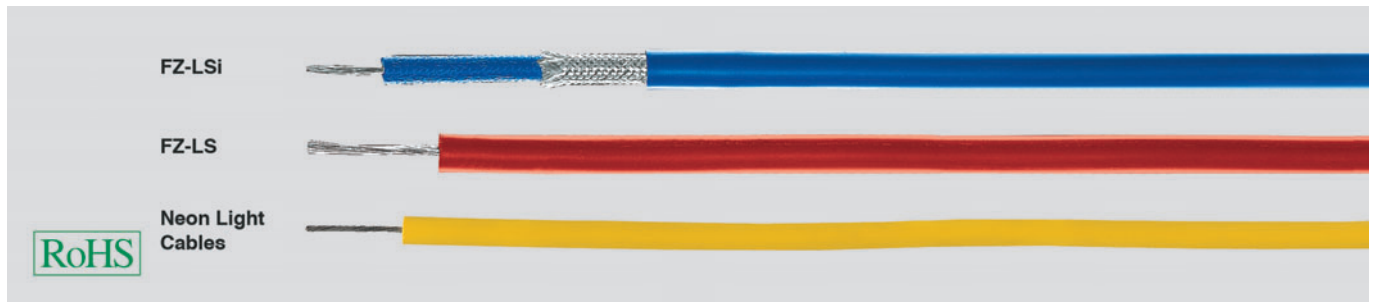

Technical data

FZ-LSi, blue

- **Test voltage** 20 kV
- **Breakdown voltage** min. 30 kV
- **Ignition voltage** (kV eff.)
0,5 mm² = 6 kV
1,0 mm² = 8 kV
1,5 mm² = 10 kV

FZ-LS, red

- **Test voltage**
for 5 mm \varnothing = 15 kV
for 7 mm \varnothing = 20 kV
- **Breakdown voltage**
for 5 mm \varnothing : min. 25 kV
for 7 mm \varnothing : min. 35 kV

Neon-light-Cable, yellow

- **Nominal voltage**
3,5 kV, 4,0 kV bzw. 7,5 kV
- **Test voltage** 10 kV
- **Specific volume resistivity**
min. 10¹² Ohm x cm
- **Minimum bending radius**
approx. 7,5x cable \varnothing
- **Radiation resistance**
up to 20x10⁶ cJ/kg (up to 20 Mrad)

Cable structure

FZ-LSi, blue

- Tinned copper stranded conductor, strand make-up see table below
- Silicone core insulation 2GI1 to DIN VDE 0207 part 20
- Glass-fibre braiding
- Outer-jacket silicone 2GM1 to DIN VDE 0207 part 21
- Jacket colour blue

FZ-LS, red

- Tinned copper conductor, 19x0,25 mm \varnothing
- Silicone core insulation 2GI1 to DIN VDE 0207 part 20
- Jacket colour redbrown

Neon-light-cable, yellow

- in adapted to DIN VDE 0250 part 1 and part 5
- Tinned copper stranded conductor 30x0,25 mm \varnothing
- Silicon core insulation 2GI1 to DIN VDE 0207 part 20
- Jacket colour yellow

Properties

Neon-light-cable, yellow

- Halogen-free according to VDE 0482 part 267/ DIN EN 50267-2-2/ IEC 60754-2 (equivalent DIN VDE 0472 part 813)
- No flame propagation according to DIN VDE 0482 part 265-2-1/ EN 50265-2-1/ IEC 60332-1 (equivalent DIN VDE 0472 part 804 test method B)
- No formation of corrosive gases
- Low smoke density
- Very good weather resistance

Note

- AWG sizes are approximate equivalent values. The actual cross-section is in mm².

Application

FZ-LSi, blue

This ignition cable is suitable for use at high and extremely alternating ambient temperatures up to +180 °C. Applications include engine manufacturing, valve manufacturing and heating technology. As protection against mechanical damages a glass fibre braiding and a silicone sheath covers the core insulation.

FZ-LS, red

This ignition cable is suitable for use at high and extremely alternating ambient temperatures up to +180 °C. Applications include the lamp and lighting industry and cooling and airconditioning technology.

Neon-light-cable, yellow

This cable is primarily suitable for use at high and extremely alternating ambient temperatures such as in the lamp and lighting industry. Protected installation is required.

FZ-LSi ignition cable

Part no.	Core colour	Cross-section mm ²	Cond. make-up (nom. val.) n x wire \varnothing	Outer \varnothing approx. mm	Cop. weight kg / km	Weight approx. kg / km	AWG-No.
23110	blue	0,5	7 x 0,3	5,0	4,8	36,0	20
23106	blue	1	19 x 0,25	7,5	9,5	65,0	17
23107	blue	1,5	28 x 0,26	8,5	14,4	88,0	16

FZ-LS high-voltage ignition cable 15 and 20kV

Part no.	Core colour	Cross-section mm ²	Cond. make-up (nom. val.) n x wire \varnothing	Outer \varnothing approx. mm	Cop. weight kg / km	Weight approx. kg / km	AWG-No.
23109	red-brown	1	19 x 0,25	5,0	9,6	34,0	17
23108	red-brown	1	19 x 0,25	7,0	9,6	60,0	17

neon light cables (neon cable) 3,5kV, 4,0kV and 7,5kV

Part no.	Core colour	Cross-section mm ²	Cond. make-up (nom. val.) n x wire \varnothing	Outer \varnothing approx. mm	Cop. weight kg / km	Weight approx. kg / km	AWG-No.
23147	ye	1,5	30 x 0,25	4,4	14,4	32,0	16
23148	ye	1,5	30 x 0,25	6,6	14,4	59,0	16
23149	ye	1,5	30 x 0,25	7,6	14,4	75,0	16

Dimensions and specifications may be changed without prior notice. (RK01)

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Test Leads](#) category:

Click to view products by [Helukabel](#) manufacturer:

Other Similar products are found below :

[R928010000](#) [R928142000](#) [1301430020](#) [15101](#) [15115](#) [15117](#) [15301](#) [15303](#) [15304](#) [15102](#) [15120](#) [15308](#) [15408](#) [15302](#) [15306](#) [15307](#) [15502](#)
[15403](#) [15407](#) [15409](#) [15501](#) [15506](#) [EM3782-12-7#](#) [EM4702-12-0](#) [BU-1149-A-36-0](#) [BU-1481-E-12-0](#) [BU-1481-E-24-0](#) [2524-A-60](#) [924961-C](#)
[924964-C](#) [924966-C](#) [924967-C](#) [LB1F-2R-RED](#) [LB1F-2R-YLW](#) [2500](#) [2501](#) [2524-A-48](#) [2977-J-48](#) [R928051000](#) [R928141000](#) [R928143000](#)
[R948131000](#) [BU-1449-E-12-2](#) [BU-1480-E-24-0](#) [BU-1481-E-12-2](#) [BU-1481-E-24-2](#) [LB1F-2R-BLK](#) [LB1F-2R-BLUE](#) [EM3542-1#](#) [EM3782-12-8#](#)