

PK 10 A






datasheet for PK 10 A
article number: 930099101



[View Full-Size Image](#)

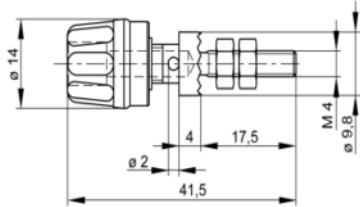

product description:	order number: 930 099-101
description:	Pole terminal with claw edge and captive insulated head. 4 mm diameter nickel-plated brass threaded bolt with 2 mm diameter transverse hole. For installation in equipment chassis and switch panels.
typ:	PK 10 A rot/red
system:	4 mm system
order number:	930 099-101
color	
other color versions:	
technical data	
measurement category acc. to IEC 61010:	CAT I
type of contact:	4 mm socket (unsprung), 2 mm cross hole
type of termination:	M4 thread
rated voltage:	30 VAC / 60 VDC
rated current: <i>Please consider derating curve!</i>	16 A
contact resistance:	2 mOhm
mounting:	screw
material	
contact material:	brass
contact surface material:	nickel
environmental conditions:	
temperature range:	-25 °C to +100 °C
drawing	
	

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Circuit Board Hardware - PCB category](#):

Click to view products by [SKS Kontakttechnik manufacturer](#):

Other Similar products are found below :

[8919-0-00-15-00-00-03-0](#) [0132-0-15-01-30-27-04-0](#) [0135-0-15-01-30-27-04-0](#) [5970-1-15-01-32-14-04-0](#) [0132-0-15-15-30-27-04-0](#) [0135-0-15-15-30-27-04-0](#) [0149-0-15-15-30-27-04-0](#) [MBI 1 BLUE](#) [7305-0-15-15-47-14-10-0](#) [MKU 1 BLACK](#) [MLN 150/1 BLACK](#) [8579-0-15-80-11-27-10-0](#) [8579-1-15-15-11-27-10-0](#) [8637-0-15-15-21-14-10-0](#) [8830-0-15-01-22-14-10-0](#) [8836-0-00-21-00-00-03-0](#) [PRUEF 2 RED](#) [9976-0-00-00-00-00-03-0](#) [1178-0-01-80-00-00-03-0](#) [PW1616](#) [1215-3-05-00-00-00-01-0](#) [1303-0-15-15-47-14-04-0](#) [1404-3](#) [1404-4](#) [1406-4](#) [1407-3](#) [1406-3](#) [1407-4](#) [1408-3](#) [1424-4](#) [1426-3](#) [1427-3](#) [1427-4](#) [1428-3](#) [1419-4](#) [1424-3](#) [1426-4](#) [1428-4](#) [MPS 1 BLACK](#) [1520150-1](#) [1548-103](#) [1801-0-15-15-30-27-04-0](#) [1938-0-00-00-00-00-03-0](#) [1942-0-00-00-00-00-03-0](#) [2101-3-00-44-00-00-07-0](#) [2104-2-01-44-00-00-07-0](#) [2108-2-00-50-00-00-07-0](#) [2108-3-00-44-00-00-07-0](#) [2109-2-00-44-00-00-07-0](#) [2110-2-00-44-00-00-07-0](#)