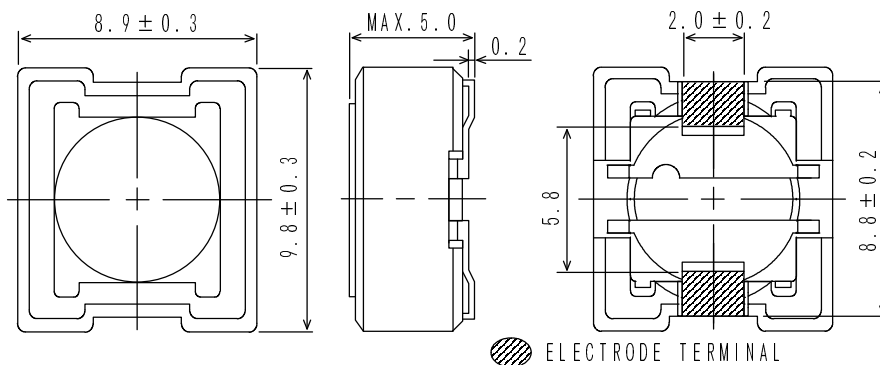
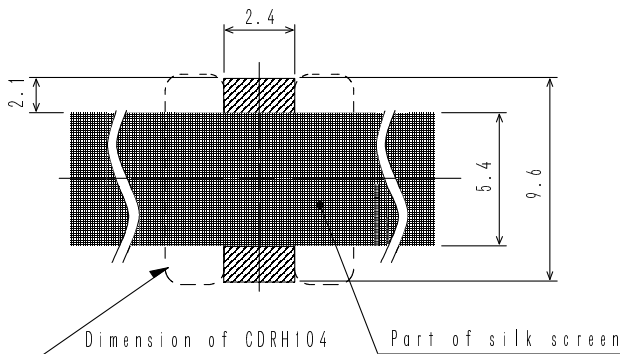



**Type: CDRH104**
**◆ Product Description**


- 10.1×9.2mm Max.(L×W), 5.0mm Max. Height.
- Inductance range: 10~470 μ H.
- Rated current range: 0.36~2.4A.
- In addition to the standards versions shown here, custom inductors are also available to meet your exact requirements.


**◆ Feature**

- Magnetically shielded construction.
- Storage temperature range: -40°C~+100°C.
- Operating temperature range: -40°C~+100°C (Including coil's self temperature rise).
- Ideally used in Notebook PC, LCD TV,DVD, Game machine, STB ,Projector etc as DC-DC converter inductors.
- RoHS compliance.

**◆ Dimensions (mm)**

**◆ Land Pattern (mm)**

**◆ Schematics (Bottom)**


10 μ H ~ 39 μ H



47 μ H ~ 470 μ H

**◆ Specification**

**Type: CDRH104**

Part Name ※	Stamp	Inductance ( $\mu$ H) 1kHz/1V	D.C.R.( $\Omega$ ) Max.(Typ.) (at 20°C)	Rated Current (A) ※2
CDRH104NP-100M□	100	10 $\pm$ 20%	50m(37m)	2.40
CDRH104NP-120M□	120	12 $\pm$ 20%	54m(40m)	2.25
CDRH104NP-150M□	150	15 $\pm$ 20%	61m(45m)	2.00
CDRH104NP-180M□	180	18 $\pm$ 20%	84m(63m)	1.80
CDRH104NP-220M□	220	22 $\pm$ 20%	94m(69m)	1.65
CDRH104NP-270M□	270	27 $\pm$ 20%	0.11(82m)	1.45
CDRH104NP-330M□	330	33 $\pm$ 20%	0.15(0.11)	1.35
CDRH104NP-390M□	390	39 $\pm$ 20%	0.17(0.13)	1.20
CDRH104NP-470M□	470	47 $\pm$ 20%	0.21(0.15)	1.10
CDRH104NP-560M□	560	56 $\pm$ 20%	0.23(0.17)	1.00
CDRH104NP-680M□	680	68 $\pm$ 20%	0.26(0.20)	0.93
CDRH104NP-820M□	820	82 $\pm$ 20%	0.36(0.27)	0.84
CDRH104NP-101M□	101	100 $\pm$ 20%	0.41(0.30)	0.76
CDRH104NP-121M□	121	120 $\pm$ 20%	0.45(0.34)	0.70
CDRH104NP-151M□	151	150 $\pm$ 20%	0.64(0.47)	0.63
CDRH104NP-181M□	181	180 $\pm$ 20%	0.84(0.62)	0.57
CDRH104NP-221M□	221	220 $\pm$ 20%	0.96(0.71)	0.52
CDRH104NP-271M□	271	270 $\pm$ 20%	1.07(0.79)	0.47
CDRH104NP-331M□	331	330 $\pm$ 20%	1.37(1.05)	0.43
CDRH104NP-391M□	391	390 $\pm$ 20%	1.55(1.19)	0.39
CDRH104NP-471M□	471	470 $\pm$ 20%	1.74(1.34)	0.36

**※ Description of part name**

CDRH104NP-100M□

- B Box
- C Carrier Tape

※ Rated current: The DC current at which the inductance decreases to 75% of it's nominal value or when  $\Delta t=40^{\circ}\text{C}$ , whichever is lower( $T_a=20^{\circ}\text{C}$ ).

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Fixed Inductors](#) category:*

*Click to view products by [Sumida](#) manufacturer:*

Other Similar products are found below :

[MLZ1608M6R8WTD25](#) [MLZ1608N6R8LT000](#) [MLZ1608N3R3LTD25](#) [MLZ1608N3R3LT000](#) [MLZ1608N150LT000](#)

[MLZ1608M150WTD25](#) [MLZ1608M3R3WTD25](#) [MLZ1608M3R3WT000](#) [MLZ1608M150WT000](#) [MLZ1608A1R5WT000](#)

[MLZ1608N1R5LT000](#) [B82432C1333K000](#) [PCMB053T-1R0MS](#) [PCMB053T-1R5MS](#) [PCMB104T-1R5MS](#) [CR32NP-100KC](#) [CR32NP-](#)

[151KC](#) [CR32NP-180KC](#) [CR32NP-181KC](#) [CR32NP-1R5MC](#) [CR32NP-390KC](#) [CR32NP-3R9MC](#) [CR32NP-680KC](#) [CR32NP-820KC](#)

[CR32NP-8R2MC](#) [CR43NP-390KC](#) [CR43NP-560KC](#) [CR43NP-680KC](#) [CR54NP-181KC](#) [CR54NP-470LC](#) [CR54NP-820KC](#) [CR54NP-8R5MC](#)

[MGDQ4-00004-P](#) [MGDU1-00016-P](#) [MHL1ECTTP18NJ](#) [MHL1JCTTD12NJ](#) [PE-51506NL](#) [PE-53601NL](#) [PE-53630NL](#) [PE-53824SNLT](#) [PE-](#)

[62892NL](#) [PE-92100NL](#) [PG0434.801NLT](#) [PG0936.113NLT](#) [PM06-2N7](#) [PM06-39NJ](#) [HC2LP-R47-R](#) [HC2-R47-R](#) [HC3-2R2-R](#) [HC8-1R2-R](#)