



Heyco® SunWrap™ -Polyethylene




BUNDLE RANGE				PART NO.		DESCRIPTION	PART DIMENSIONS					
Minimum Diameter		Maximum Diameter		UV Black	Natural		A Outside Diameter		B Pitch		C Thickness	
in.	mm.	in.	mm.				in.	mm.	in.	mm.	in.	mm.
.125	3,2	1.500	38,1	8904	8905	CW 187 PE*	.187	4,8	.250	6,3	.031	0,8
.187	4,8	2.000	50,8	8908	8909	CW 250 PE	.250	6,3	.375	9,5	.045	1,1
.312	7,9	3.000	76,2	8912	8913	CW 375 PE	.375	9,5	.438	11,1	.052	1,3
.375	9,5	4.000	101,6	8916	8917	CW 500 PE	.500	12,7	.500	12,7	.062	1,6
.500	12,7	4.500	114,3	8920	8921	CW 625 PE*	.625	15,9	.625	15,9	.062	1,6
		5.000	127,0	8924	8925	CW 750 PE	.750	19,1	.750	19,1	.065	1,7
1.000	25,4	7.000	177,8	8928	8929	CW 1000 PE	1.000	25,4	1.000	25,4	.080	2,0

Standard colors UV black or natural.
* Parts are not UR recognized.

- **Easy to use: Just twist on wire!**
- Allows breakouts of single/multiple wires and re-routing of replacement wires.
- Absorbs vibration, insulates cables, and resists abrasion.
- Multiple sizes bundle and protect cables, wires, tubing, and hoses from .125" (3,2 mm) to 7" (177,8 mm) diameters.
- Available in UV black or natural color.
- For hose and cable **clamps**, see pages 7-1 through 7-4.

Material Certifications	Polyethylene
Conforms to:	Recognized under the Component Program of Underwriters' Laboratories File E173954
Temperature Range	Fed Spec LP390, Mil I-631D, Mil P-21922B
	-76°F (-60°C) to 190°F (88°C)
	UL rated temp not to exceed 122°F (50°C)

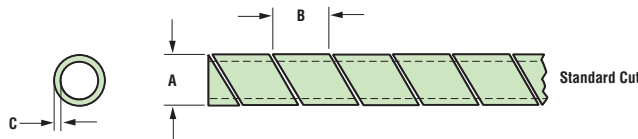

Heyco® SunWrap™ -Nylon



BUNDLE RANGE				PART NO.		DESCRIPTION	PART DIMENSIONS					
Minimum Diameter		Maximum Diameter		UV Black	Natural		A Outside Diameter		B Pitch		C Thickness	
in.	mm.	in.	mm.				in.	mm.	in.	mm.	in.	mm.
.125	3,2	1.500	38,1	8936	8937	CW 187 N*	.187	4,8	.250	6,3	.020	0,5
.187	4,8	2.000	50,8	8940	8941	CW 250 N	.250	6,3	.375	9,5	.025	0,6
.312	7,9	3.000	76,2	8944	8945	CW 375 N	.375	9,5	.438	11,1	.035	0,9
.375	9,5	4.000	101,6	8948	8949	CW 500 N	.500	12,7	.500	12,7	.035	0,9
.500	12,7	4.500	114,3	8952	8953	CW 625 N*	.625	15,9	.625	15,9	.032	0,8
		5.000	127,0	8956	8957	CW 750 N	.750	19,1	.750	19,1	.032	0,8
1.000	25,4	7.000	177,8	8960	8961	CW 1000 N	1.000	25,4	1.000	25,4	.032	0,8

Standard colors UV black or natural.
* Parts are not UR recognized.

- **Easy to use: Just twist on wire!**
- Allows breakouts of single/multiple wires and re-routing of replacement wires.
- Absorbs vibration, insulates cables, and resists abrasion.
- Multiple sizes bundle and protect cables, wires, tubing, and hoses from .125" (3,2 mm) to 7" (177,8 mm) diameters.
- Available in UV black or natural nylon color.
- For hose and cable **clamps**, see pages 7-1 through 7-4.

Material Certifications	Nylon
Conforms to:	Recognized under the Component Program of Underwriters' Laboratories File E173954
Temperature Range	ASTM D 4066, Group 2; Fed Spec LP410
	-40°F (-40°C) to 250°F (121°C)
	UL rated temp not to exceed 149°F (65°C)

Quick Specs