

**High Density**

**SPECIFICATIONS:**

**MATERIALS AND PLATINGS**

<b>Shells</b>	Steel, tin plated, grounding indents on plug.
<b>Contact Material</b>	Copper alloy
<b>Contact Plating</b>	Engagement area: gold (see ordering information).
<b>Termination End</b>	150µ" (3.81µm) tin/lead
<b>Nickel Underplate</b>	50µ" (1.27µm) entire contact


**ELECTRICAL DATA**

<b>Current Rating</b>	3 Amps maximum per contact
<b>Voltage Rating</b>	125 VAC
<b>Dielectric Withstanding Voltage</b>	1000 VAC (minimum)
<b>Dielectric</b>	Glass filled thermoplastic, black, UL 94 VO
<b>Insulation Resistance</b>	5,000 Megaohms (minimum)
<b>Contact Resistance</b>	15 Milliohms (maximum)

**CLIMATIC DATA**

<b>Operating Temperature</b>	-67°F (-55°C) to 221°F (105°C)
------------------------------	--------------------------------

**17 BH/HD SERIES**

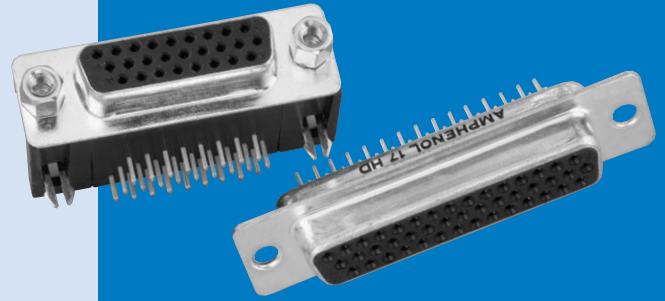

Amphenol's High Density D-Subminiature connectors complement Amphenol's extensive D-Subminiature connector line. This line of connectors offers many superior features, high performance level and low installation cost.

The connector configurations are available in 15, 26, 44, 62 and 78 positions.

The product offering includes PCB mount connectors in both straight or right angle termination styles. Straight PCB mount are available in both Fixed Screw Machine and Stamped and Formed contacts, while Right Angle PCB mount are only available with Stamped and Formed contacts.


A cable mount version with solder terminations is also available, which can be combined with Amphenol's standard line of shielded or unshielded backshells.

- Industrial
- Telecom
- Any industry standard I / O connections

INCHES (MM)



**DIMENSIONS**

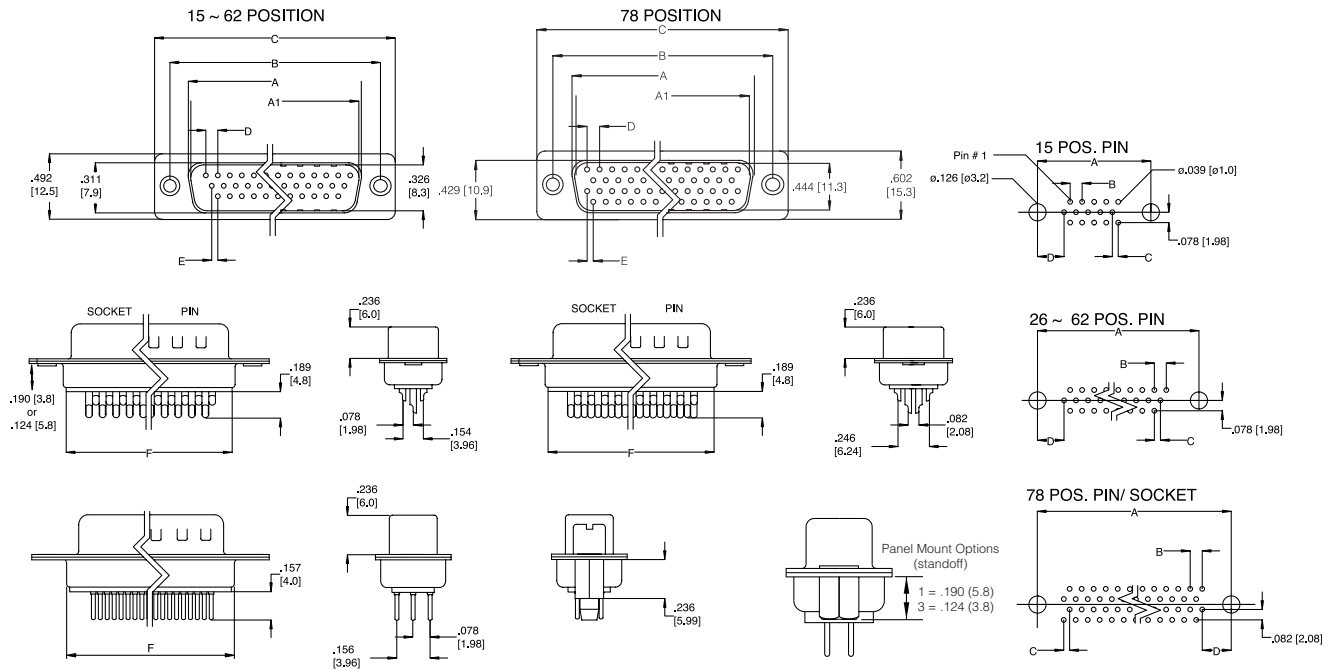

CONTACTS	A SOCKET	A1 PIN	B	C	D	E	F
15	.642 [16.30]	.666 [16.92]	.984 [25.0]	1.213 [30.8]	.090 [2.29]	.045 [1.145]	.756 [19.2]
26	.969 [24.6]	.994 [25.25]	1.311 [33.3]	1.543 [39.2]	.090 [2.29]	.045 [1.145]	1.071 [27.2]
44	1.508 [38.3]	1.534 [38.96]	1.854 [47.1]	2.091 [53.1]	.090 [2.29]	.045 [1.145]	1.618 [41.1]
62	2.157 [54.8]	2.182 [55.42]	2.50 [63.5]	2.732 [69.4]	.095 [2.41]	.047 [1.205]	2.256 [57.3]
78	2.05 [52.20]	2.079 [52.81]	2.40 [61.0]	2.638 [67.0]	.095 [2.41]	.047 [1.205]	2.169 [55.1]

CONTACTS	A	B	C	D
15	.984 [25.0]	.090 [2.29]	.045 [1.145]	.277 [7.04]
26	1.311 [33.3]	.090 [2.29]	.045 [1.145]	.277 [7.04]
44	1.854 [47.1]	.090 [2.29]	.045 [1.145]	.277 [7.04]
62	2.50 [63.5]	.095 [2.41]	.047 [0.120]	0.699
78	2.402 [61.0]	.095 [2.41]	.047 [0.120]	0.699

**ORDERING INFORMATION**

**17 HD Series High Density D-Sub**

*Solder Cup & Straight P.C. Mount, Front Metal Shell Fixed Contact*

**17HD - 0XX - X - XX - X - XX**

Series \_\_\_\_\_

Number Of Positions \_\_\_\_\_  
15, 26, 44, 62, 78

Type \_\_\_\_\_  
P Pin (male)  
S Socket (female)

**Termination Types:**

- 00 Solder Cup
- 30 Board-mount, Vertical
- 32 Board-mount, Vertical with Boardlocks
- 33 Board-mount, Vertical with standoff, no boardlock

**Panel Mounting Options:**

- 0 .120 (3.05) Clear Hole
- 1 #4-40 Threaded Hole .190 (5.8)
- 2 #4-40 Fixed Female Screwlock
- 3 #4-40 Threaded Hole .124 (3.8)

**Plating Code:**

- AA Gold Flash over Nickel
- AM 30µ" (.76µm) Gold over Nickel

INCHES (MM)