

SPECIFICATIONS

Material: HEXSEALS: Silicone rubber conforms to A-A-59588 Class 3, GR 60 unless otherwise specified.

Mounting Nut: HEXSEALS: Brass, nickel-plated (unless otherwise noted)

Temperature Range: HEXSEALS: -94°F to +400°F

Pressure Range: Exceeds 15 psi internal and 1500 psi external.


Operational Life: 50,000 actuations (minimum).

Shelf Life: Excess of 25 years.

Resistant to: Salt spray, sunlight, ozone, weather, fungus, and most acids and lubricating oils


Agency Recognition: E-SEALS and HEXSEALS are UL-listed to UL Std. 50 types 1-13, and meet CSA standards.

Installation: If a reducing adaptor is required - see page 14 of HEXSEAL catalog HEX200 for part numbers and drawing.

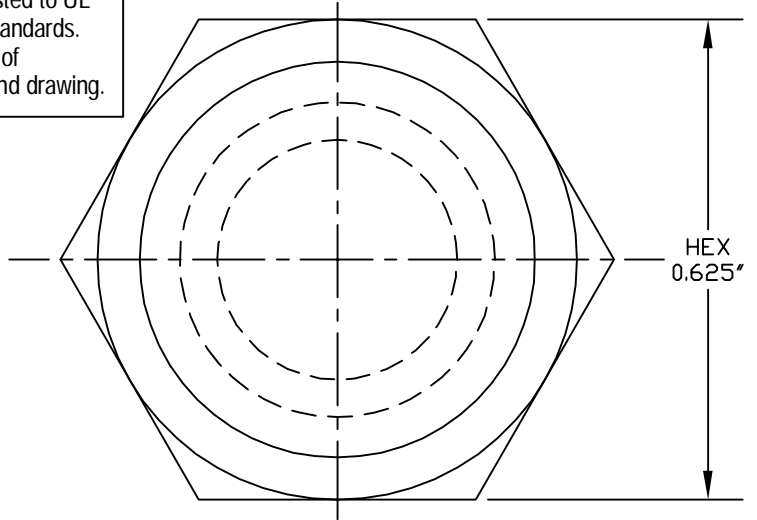

MONEL MESH
PER QQ-N-281 CLASS A
FOR EMI/RFI SUPPRESSION

PERMISSIBLE RUBBER
OVERLAY 0.005 MAX.

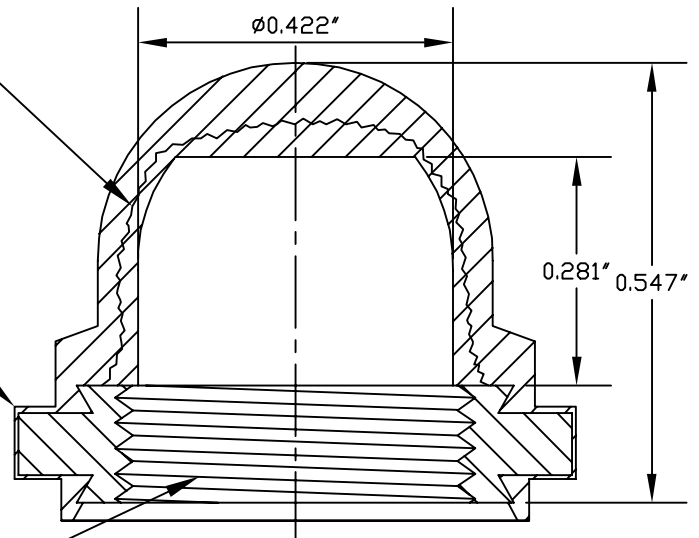

15/32-32NS-2B

C	MAT'L CHANGED and REDRAWN for ACCURACY	S. GOK	06.11.09
B	CAD COMPUTER GENERATED		09.23.02
A	UPDATED AND REDRAWN	M. MORSE	09.12.76
REV.	DESCRIPTION	DATE	
MAXIMUM AND MINIMUM MEASUREMENTS ARE STATED DIRECTLY ON EACH DIMENSION.			
TITLE: PUSHBUTTON BOOT WITH EMI/RFI SHIELD (N3030RFI)		ENG. S. GOK	06.11.09
MAT'L: Silicone Rubber		DWN. R.C.	07.22.74
A-A-59588, Gr.60		CHKD. J. CELLA	06.12.09
FINISH: GRAY		SCALE 4:1	(N-3030 RFI) HEXSEAL ®
		DWG. NO.	

THIS DRAWING COVERS PROPRIETARY ITEM AND IS THE PROPERTY OF THE APM-HEXSEAL CORPORATION.
THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE WRITTEN APPROVAL OF AN OFFICER OF THE APM-HEXSEAL CORPORATION.