
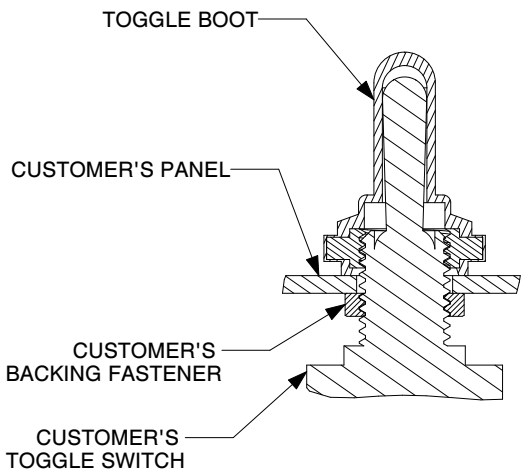
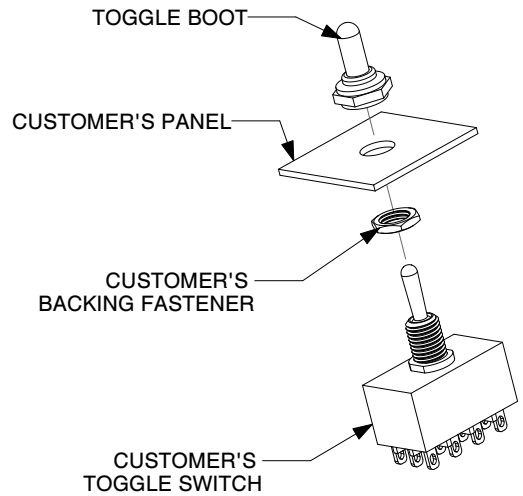
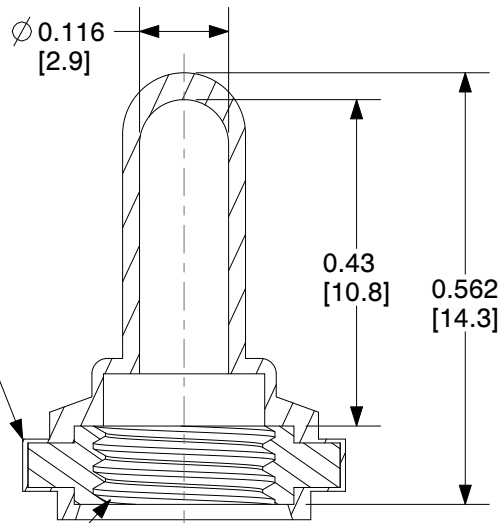


SPECIFICATIONS

Material: Silicone rubber conforms to ASTM D1418 Class III, GR50 (unless otherwise specified).
Mounting Nut: Brass, nickel-plated
Temperature Range: -80° F to +400° F (-62° C to +204° C).
Pressure Range: Exceeds 15 psi internal and 1500 psi external.
Operational Life: 50,000 actuations (minimum).
Shelf Life: Excess of 25 years.
Resistant to: Salt spray, sunlight, ozone, weather, fungus, and most acids and lubricating oils.
Agency Recognition: UL & ULC Recognized to UL Std. 50

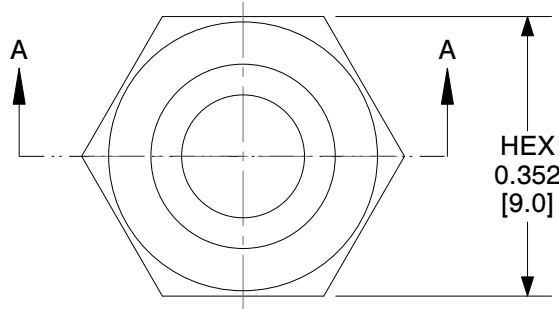

TOLERANCES: UNLESS OTHERWISE NOTED $\pm 1/32$ [± 0.793].

F	ADD CELSIUS EQUIVALENT TEMPERATURE VALUE AND ADDITIONAL VIEWS.	DAN LAW	08.08.12
E	CHABGED ALL DIM. FROM INCH TO MM.		03.18.11
D	MAT'L CHNAGED and REDRAWN FOR ACCURACY		08.31.09
C	CAD COMPUTER GENERATED		09.23.02
B	REDRAWN		09.12.74

REV.	DESCRIPTION	DATE
MAXIMUM AND MINIMUM MEASUREMENTS ARE STATED DIRECTLY ON EACH DIMENSION.	TITLE: BOOT, TOGGLE SWITCH # (1131/25)	ENG. M.M. 12.07.57
		DWN: J. PALUMBO 12.07.57
		CHKD. KEN S. 10.10.12
MAT'L: SILICONE RUBBER conforms to ASTM D1418	APM-HEXSEAL CORPORATION	SCALE DWG.NO. 1131/25
FINISH: BLACK		3:1

THIS DRAWING COVERS PROPRIETARY ITEM AND IS THE PROPERTY OF THE APM-HEXSEAL CORPORATION. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE WRITTEN APPROVAL OF AN OFFICER OF THE APM-HEXSEAL CORPORATION.